

3M™ 3/C Phase Rejacketing System RJS Series

Instructions

Product Number	Cable Metallic Shield Diameter Range	Supplied Configuration
RJS-1 <input type="checkbox"/>	0.43"–0.60" (10,9–15,2 mm)	<input type="checkbox"/> 4' Long <input type="checkbox"/> 6' Long <input type="checkbox"/> 10' Long
RJS-2 <input type="checkbox"/>	0.60"–0.80" (15,2–20,3 mm)	
RJS-3 <input type="checkbox"/>	0.80" – 1.02" (20,3 – 25,9 mm)	
RJS-4 <input type="checkbox"/>	1.02" – 1.28" (25,9 – 32,5 mm)	
RJS-5 <input type="checkbox"/>	1.28" – 1.62" (32,5 – 41,0 mm)	
RJS-6 <input type="checkbox"/>	1.62" – 1.91" (41,1 - 48,5 mm)	

⚠ CAUTION

Working around energized systems may cause serious injury or death. Installation should be performed by personnel familiar with good safety practice in handling electrical equipment. De-energize and ground all electrical systems before installing product.

RJS Series Rejacket Sleeve Assembly – Cutting and Installation Method

1. Secure copper tape shield ends with vinyl tape (①, *Figure 1*).
2. Determine required length of cable shielding to be re-jacketed (Typical ②, *Figure 1*).

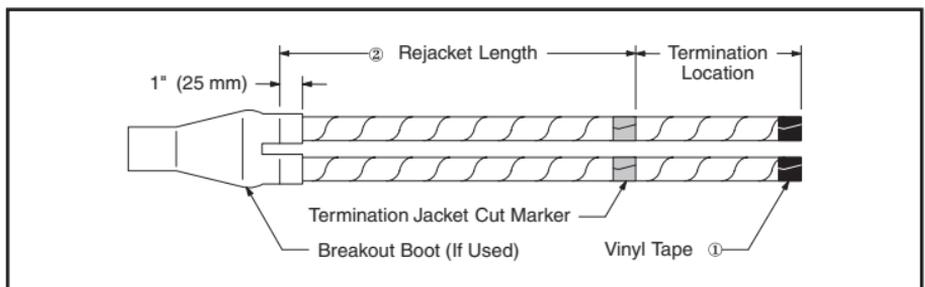


Figure 1

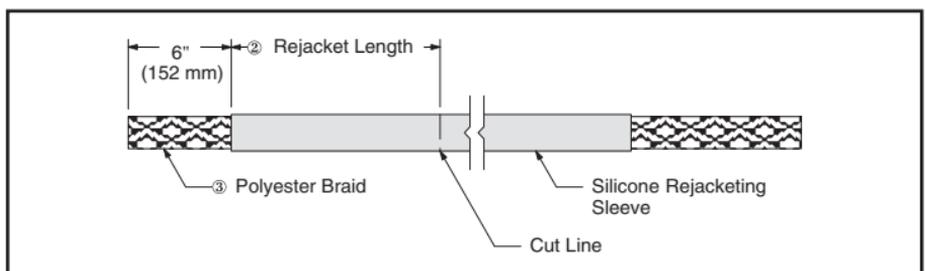


Figure 2

3. Select end of assembly with shorter, 6 " (152 mm), polyester braid exposure (③, Figure 2). Using scissors or sharp knife, cut sleeve/ braid assembly to desired length (②, Figure 2).

NOTE: Do not include exposed polyester braid in re-jacketing sleeve measurement.

4. **Additional Cuts:** Pull 6" (152 mm) of inner polyester braid out beyond silicone re-jacketing sleeve (③, Figure 2). Cut sleeve/braid assembly to desired length.
5. Install re-jacketing sleeve assemblies (Figure 3):
 - a. Open polyester braid end and push assembly into place (④, Figure 3).
 - b. Slide assembly close to desired final position and fold silicone sleeve back on itself for 1" (25 mm) (⑤, Figure 3).
 - c. Trim off exposed polyester braid material (⑤, Figure 3).

Caution: Do not damage silicone sleeve while cutting.

- d. Push assembly into final position (adjacent to finger of breakout boot if used) and flip silicone sleeve into place (Figure 3).

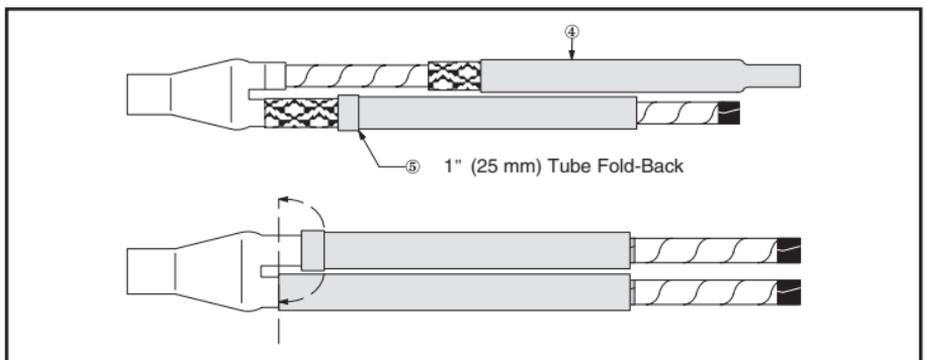


Figure 3

3M is a trademark of 3M Company.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one (1) year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**

3M

Electrical Markets Division

6801 River Place Blvd.
Austin, TX 78726-9000
800-245-3573
Fax 800-245-0329
www.3M.com/electrical

Please Recycle. Printed in USA.
© 3M 2011 All Rights Reserved.
78-8121-1001-9-D