


**CZSH6-100C**

**SURFACE MOUNT SILICON  
DUAL, COMMON CATHODE  
SCHOTTKY POWER RECTIFIER  
6.0 AMP, 100 VOLT**

**SOT-223 CASE**[www.centrasemi.com](http://www.centrasemi.com)**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR CZSH6-100C is manufactured with two 3.0 Amp Schottky rectifiers assembled in a common cathode configuration and packaged in a SOT-223 case. This device has been designed for high voltage applications requiring a low forward voltage drop.

**MARKING: FULL PART NUMBER****MAXIMUM RATINGS:** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

	SYMBOL		UNITS
Peak Repetitive Reverse Voltage	$V_{RRM}$	100	V
DC Blocking Voltage	$V_R$	100	V
RMS Reverse Voltage	$V_{R(RMS)}$	70	V
Average Forward Current ( $T_A=75^{\circ}\text{C}$ )	$I_O$	6.0	A
Peak Forward Surge Current, $t_p=8.3\text{ms}$	$I_{FSM}$	75	A
Operating and Storage Junction Temperature	$T_J, T_{stg}$	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance	$\Theta_{JA}$	62.5	$^{\circ}\text{C/W}$

**ELECTRICAL CHARACTERISTICS PER DIODE:** ( $T_A=25^{\circ}\text{C}$  unless otherwise noted)

SYMBOL	TEST CONDITIONS	MAX	UNITS
$I_R$	$V_R=100\text{V}$	10	$\mu\text{A}$
$I_R$	$V_R=100\text{V}, T_A=100^{\circ}\text{C}$	20	$\text{mA}$
$V_F$	$I_F=1.0\text{A}$	0.7	V
$V_F$	$I_F=3.0\text{A}$	0.8	V
$V_F$	$I_F=6.0\text{A}$	1.0	V


R3 (7-May 2019)

CZSH6-100C

**SURFACE MOUNT SILICON  
DUAL, COMMON CATHODE  
SCHOTTKY POWER RECTIFIER  
6.0 AMP, 100 VOLT**




### SOT-223 CASE - MECHANICAL OUTLINE

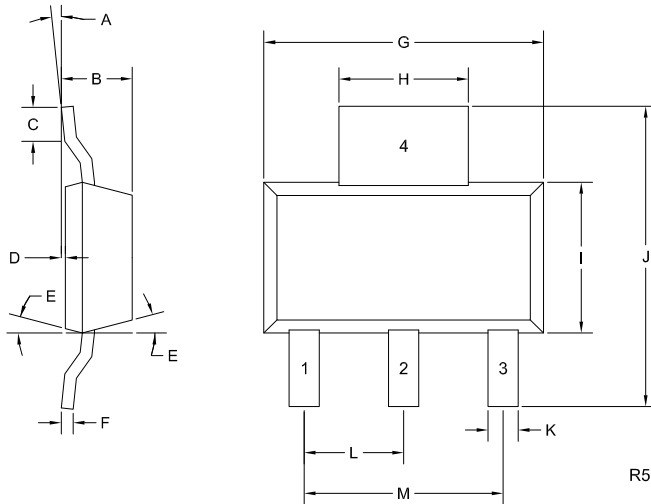

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0°	10°	0°	10°
B	0.059	0.071	1.50	1.80
C	0.018	---	0.45	---
D	0.000	0.004	0.00	0.10
E	10°		10°	
F	0.009	0.014	0.23	0.35
G	0.248	0.270	6.30	6.85
H	0.114	0.122	2.90	3.10
I	0.130	0.146	3.30	3.70
J	0.264	0.287	6.70	7.30
K	0.024	0.033	0.60	0.85
L	0.091		2.30	
M	0.181		4.60	

SOT-223 (REV: R5)

### PIN CONFIGURATION



#### LEAD CODE:

- 1) Anode D1
  - 2) Cathode D1, D2
  - 3) Anode D2
  - 4) Cathode D1, D2
- Pin 2 and Pin 4 are common.

#### MARKING:

**FULL PART NUMBER**

R3 (7-May 2019)






[www.centalsemi.com](http://www.centalsemi.com)

CZSH6-100C

SURFACE MOUNT SILICON  
DUAL, COMMON CATHODE  
SCHOTTKY POWER RECTIFIER  
6.0 AMP, 100 VOLT



### TYPICAL ELECTRICAL CHARACTERISTICS

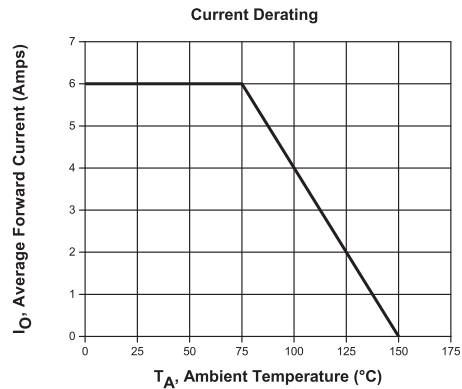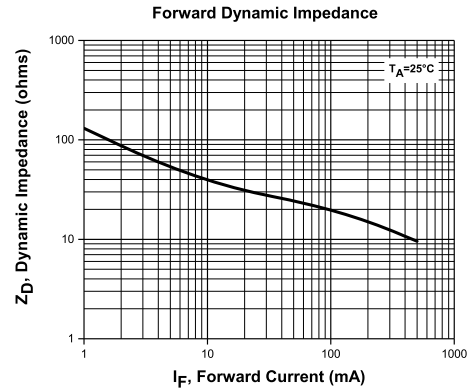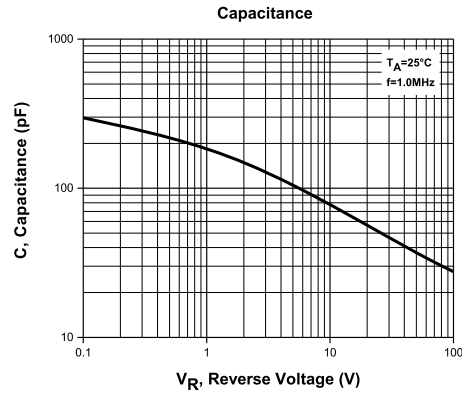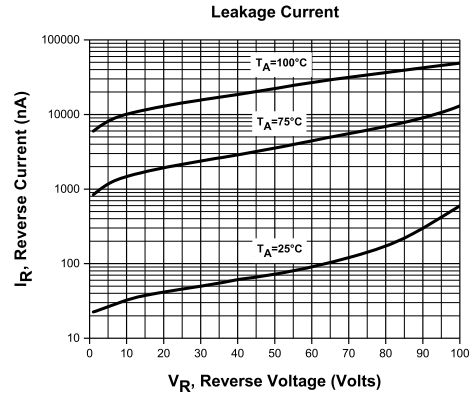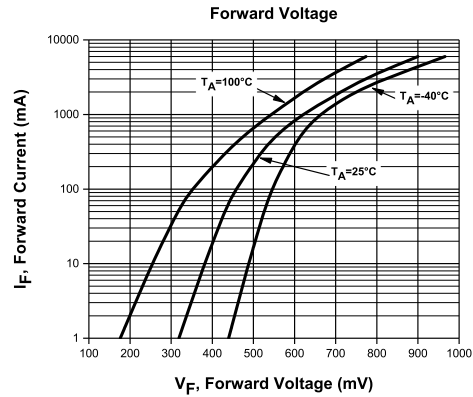

R3 (7-May 2019)

[www.centrasemi.com](http://www.centrasemi.com)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centalsemi.com](http://www.centalsemi.com)

**Worldwide Field Representatives:**  
[www.centalsemi.com/wwreps](http://www.centalsemi.com/wwreps)

**Worldwide Distributors:**  
[www.centalsemi.com/wwdistributors](http://www.centalsemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centalsemi.com/terms](http://www.centalsemi.com/terms)