


## Thermally-Enhanced High Power RF LDMOS FET 140 W, 28 V, 2620 – 2690 MHz

### Description

The PTFC261402FC is a 140-watt LDMOS FET intended for use in multi-standard cellular power amplifier applications in the 2620 to 2690 MHz frequency band. Features include input and output matching, high gain and thermally-enhanced package with earless flange. Manufactured with Infineon's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PTFC261402FC  
Package H-37248-4

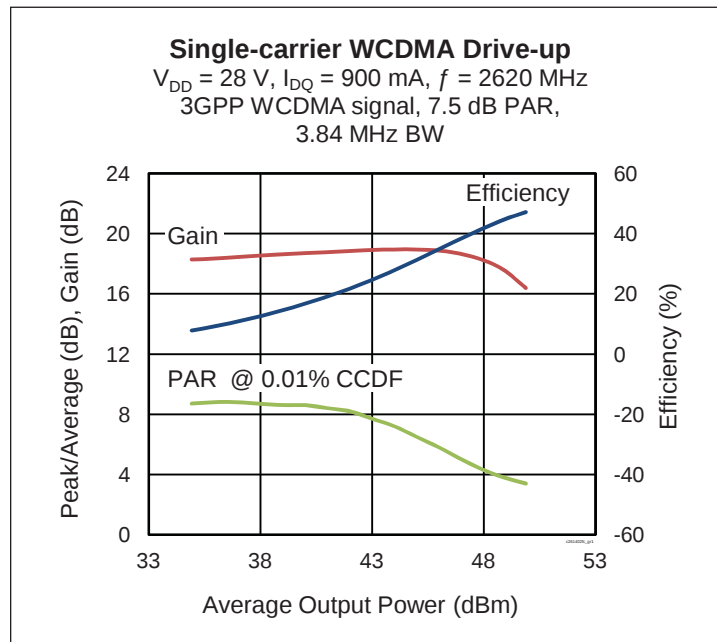

### Features

- Broadband internal matching
- Wide video bandwidth
- Typical pulsed CW performance, 2655 MHz, 28 V (combined outputs)
  - Output power at  $P_{1dB} = 140\text{ W}$
  - Efficiency = 50%
  - Gain = 16.5 dB
- Typical single-carrier WCDMA performance, 2655 MHz, 28 V
  - Output power = 46 dBm avg
  - Gain = 17.5 dB
  - Efficiency = 30.5%
- Capable of handling 10:1 VSWR @ 28 V, 140 W (CW) output power
- Integrated ESD protection
- Human Body Model Class 1C (per ANSI/ESDA/ JEDEC JS-001)
- Low thermal resistance
- Pb-free and RoHS compliant

### RF Characteristics

#### Single-carrier WCDMA Specifications (combined outputs, tested in Infineon production test fixture)

$V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 900\text{ mA}$ ,  $P_{OUT} = 28\text{ W avg}$ ,  $f = 2655\text{ MHz}$ , 3GPP signal, channel bandwidth = 3.84 MHz, peak/average = 10 dB @ 0.01% CCDF

| Characteristic               | Symbol   | Min  | Typ | Max | Unit |
|------------------------------|----------|------|-----|-----|------|
| Gain                         | $G_{ps}$ | 17   | 18  | —   | dB   |
| Drain Efficiency             | $\eta_D$ | 23.5 | 25  | —   | %    |
| Adjacent Channel Power Ratio | ACPR     | —    | -34 | -31 | dBc  |

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

## DC Characteristics (each side)

| Characteristic                 | Conditions                                        | Symbol        | Min | Typ | Max | Unit          |
|--------------------------------|---------------------------------------------------|---------------|-----|-----|-----|---------------|
| Drain-Source Breakdown Voltage | $V_{GS} = 0\text{ V}$ , $I_{DS} = 10\text{ mA}$   | $V_{(BR)DSS}$ | 65  | —   | —   | V             |
| Drain Leakage Current          | $V_{DS} = 28\text{ V}$ , $V_{GS} = 0\text{ V}$    | $I_{DSS}$     | —   | —   | 1   | $\mu\text{A}$ |
|                                | $V_{DS} = 63\text{ V}$ , $V_{GS} = 0\text{ V}$    | $I_{DSS}$     | —   | —   | 10  | $\mu\text{A}$ |
| Gate Leakage Current           | $V_{GS} = 10\text{ V}$ , $V_{DS} = 0\text{ V}$    | $I_{GSS}$     | —   | —   | 1   | $\mu\text{A}$ |
| On-State Resistance            | $V_{GS} = 10\text{ V}$ , $V_{DS} = 0.1\text{ V}$  | $R_{DS(on)}$  | —   | 0.1 | —   | $\Omega$      |
| Operating Gate Voltage         | $V_{DS} = 28\text{ V}$ , $I_{DQ} = 900\text{ mA}$ | $V_{GS}$      | —   | 2.5 | —   | V             |


## Maximum Ratings

| Parameter                                                        | Symbol          | Value       | Unit                 |
|------------------------------------------------------------------|-----------------|-------------|----------------------|
| Drain-Source Voltage                                             | $V_{DSS}$       | 65          | V                    |
| Gate-Source Voltage                                              | $V_{GS}$        | −6 to +10   | V                    |
| Operating Voltage                                                | $V_{DD}$        | 0 to +32    | V                    |
| Junction Temperature                                             | $T_J$           | 225         | $^{\circ}\text{C}$   |
| Storage Temperature Range                                        | $T_{STG}$       | −65 to +150 | $^{\circ}\text{C}$   |
| Thermal Resistance ( $T_{CASE} = 70^{\circ}\text{C}$ , 140 W CW) | $R_{\theta JC}$ | 0.30        | $^{\circ}\text{C/W}$ |

## Ordering Information





| Type and Version     | Order Code              | Package and Description                      | Shipping             |
|----------------------|-------------------------|----------------------------------------------|----------------------|
| PTFC261402FC V1 R0   | PTFC261402FCV1R0XTMA1   | Thermally-enhanced earless flange, push-pull | Tape & Reel, 50 pcs  |
| PTFC261402FC V1 R250 | PTFC261402FCV1R250XTMA1 | Thermally-enhanced earless flange, push-pull | Tape & Reel, 250 pcs |

## Pinout Diagram




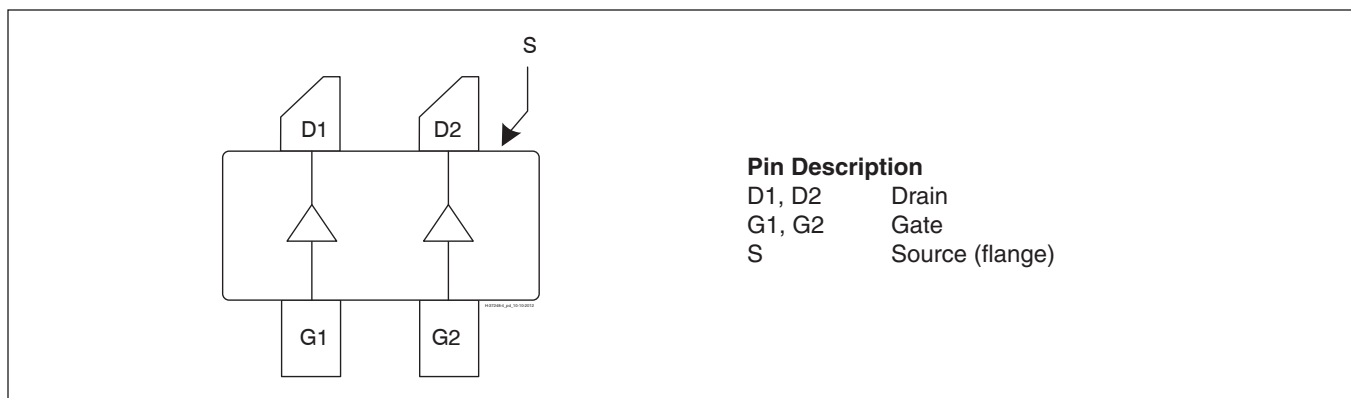


Lead connections for PTFC261402FC





# Typical Performance (data taken in a production test fixture)

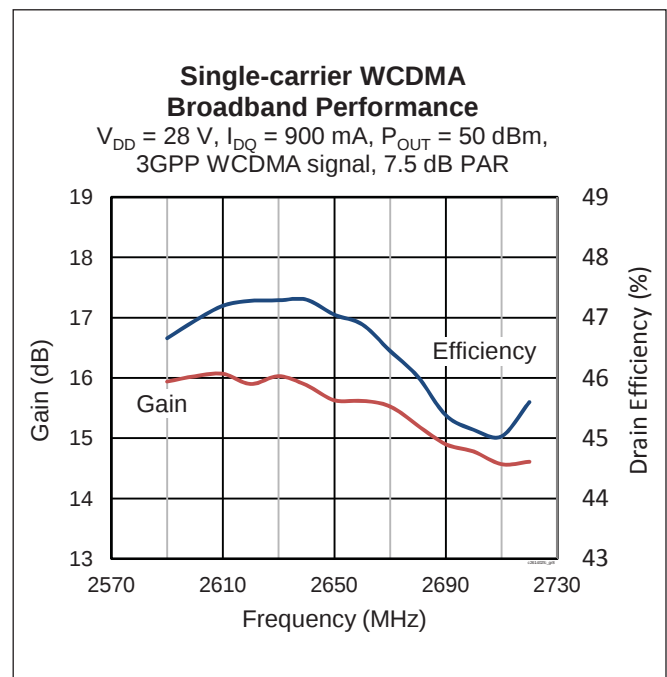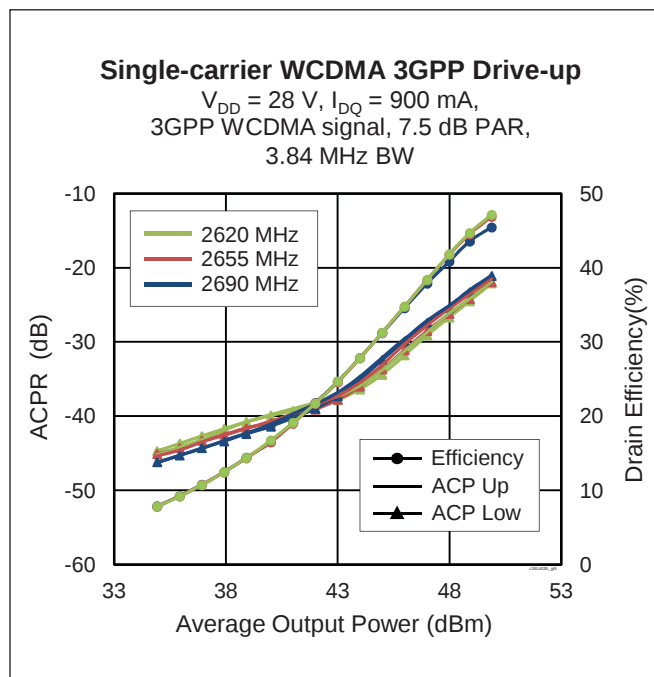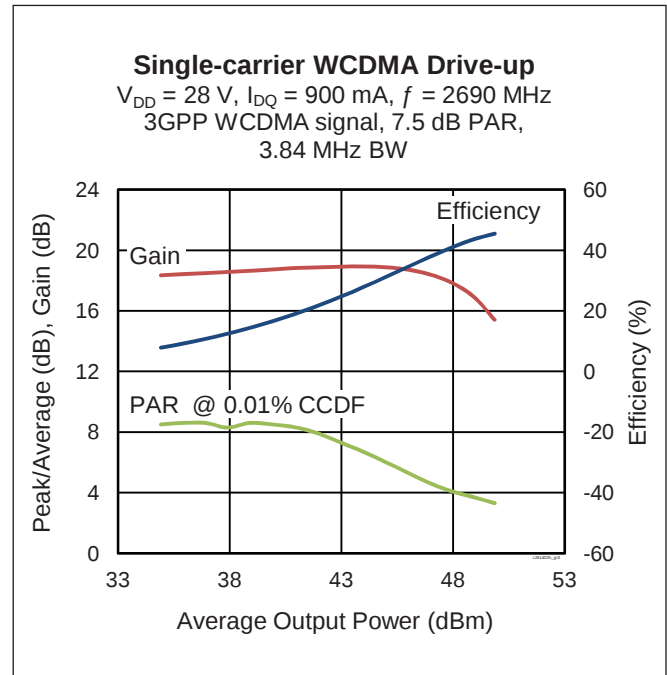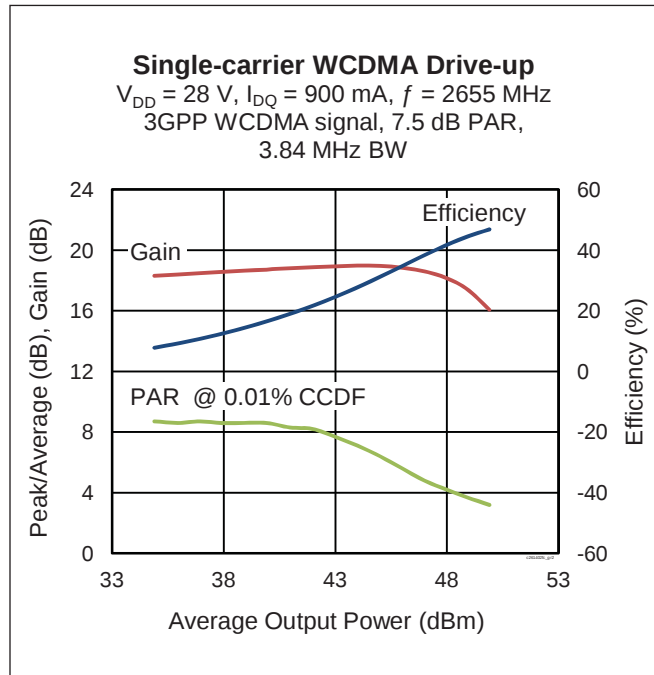


# Typical Performance (cont.)

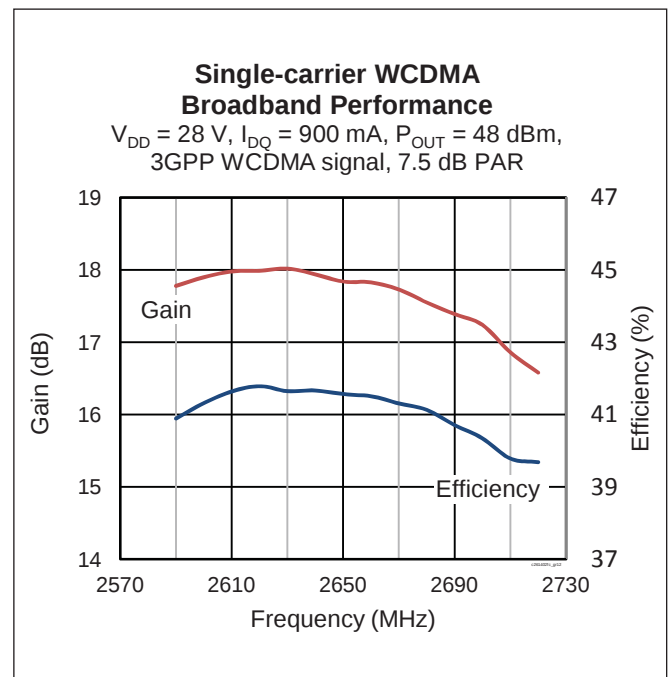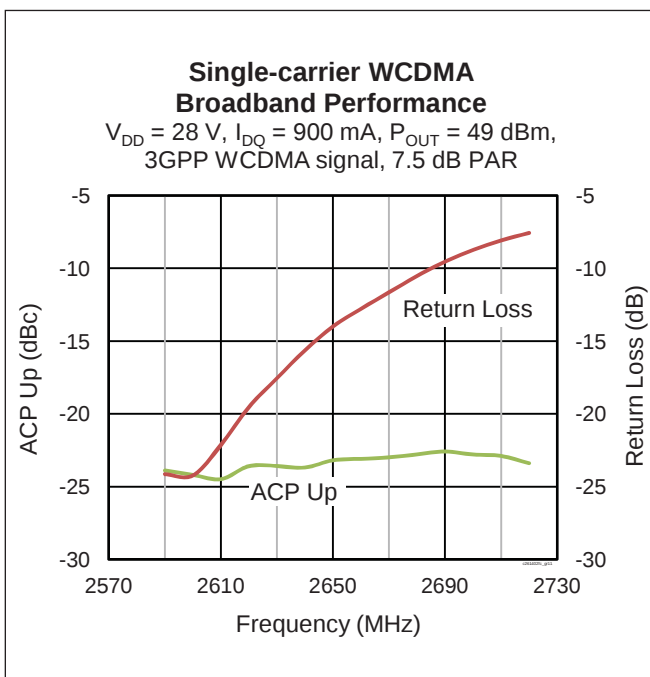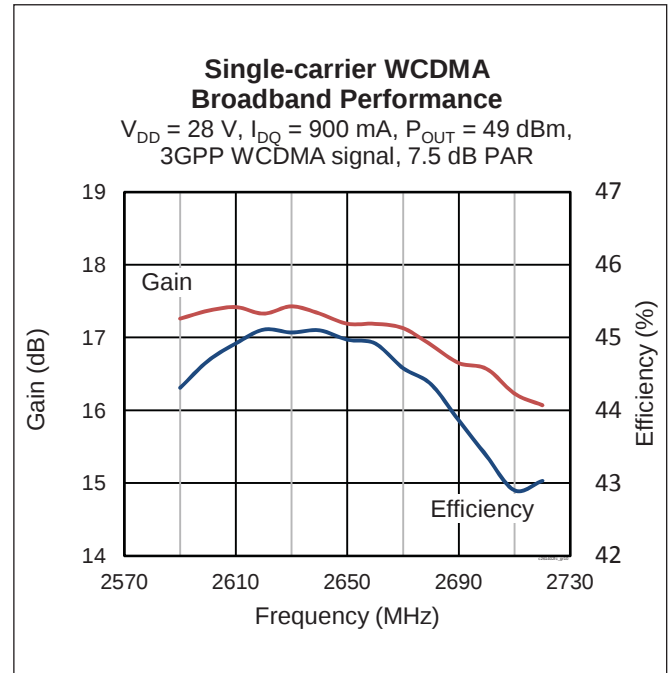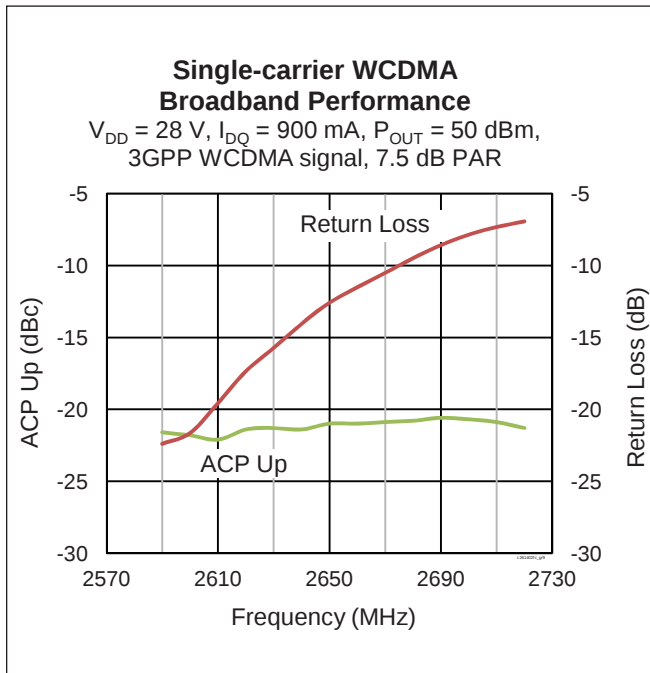


# Typical Performance (cont.)

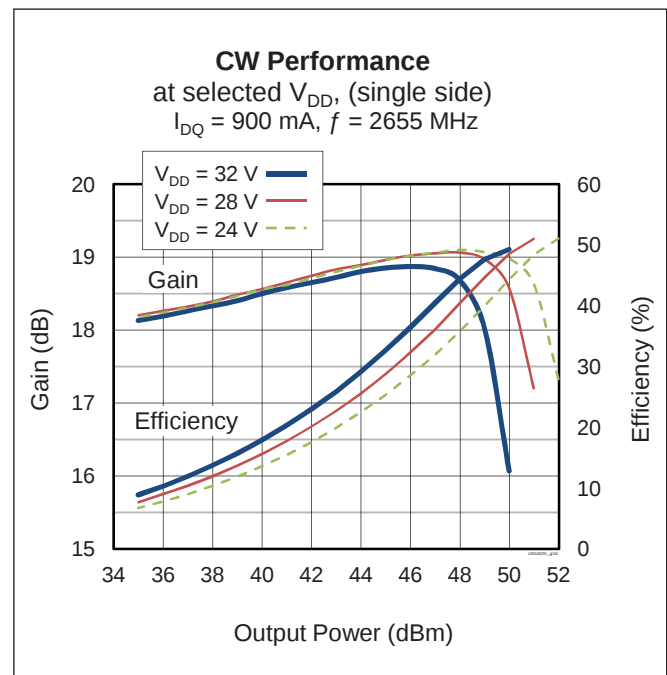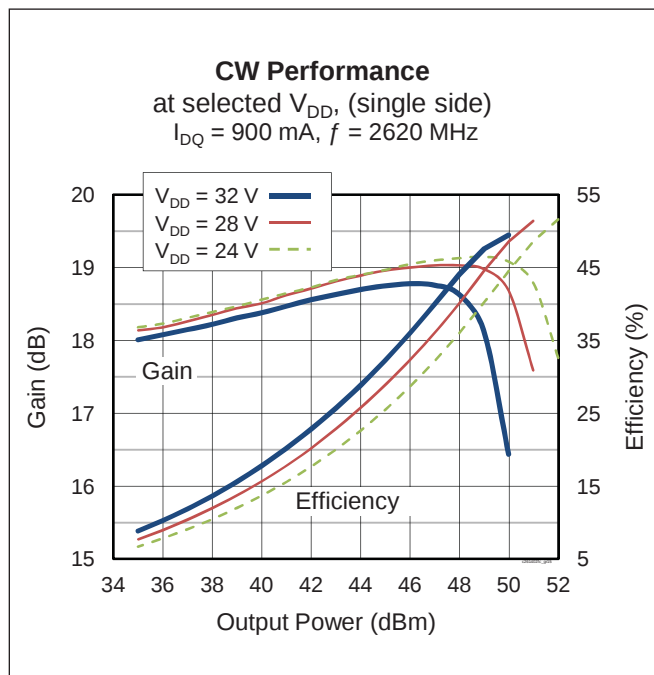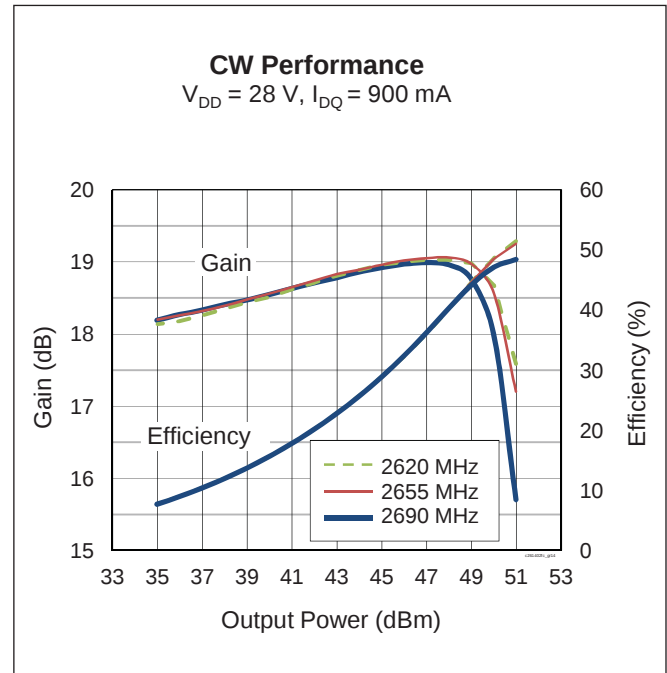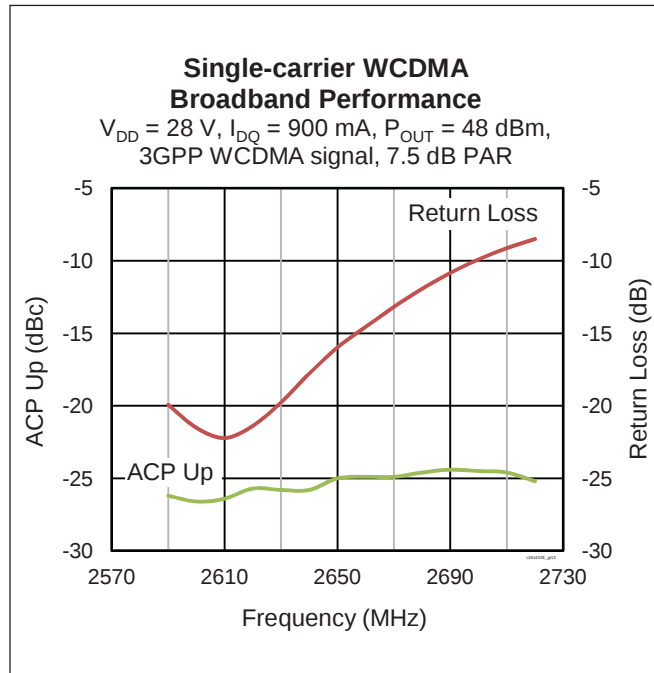

## Typical Performance (cont.)

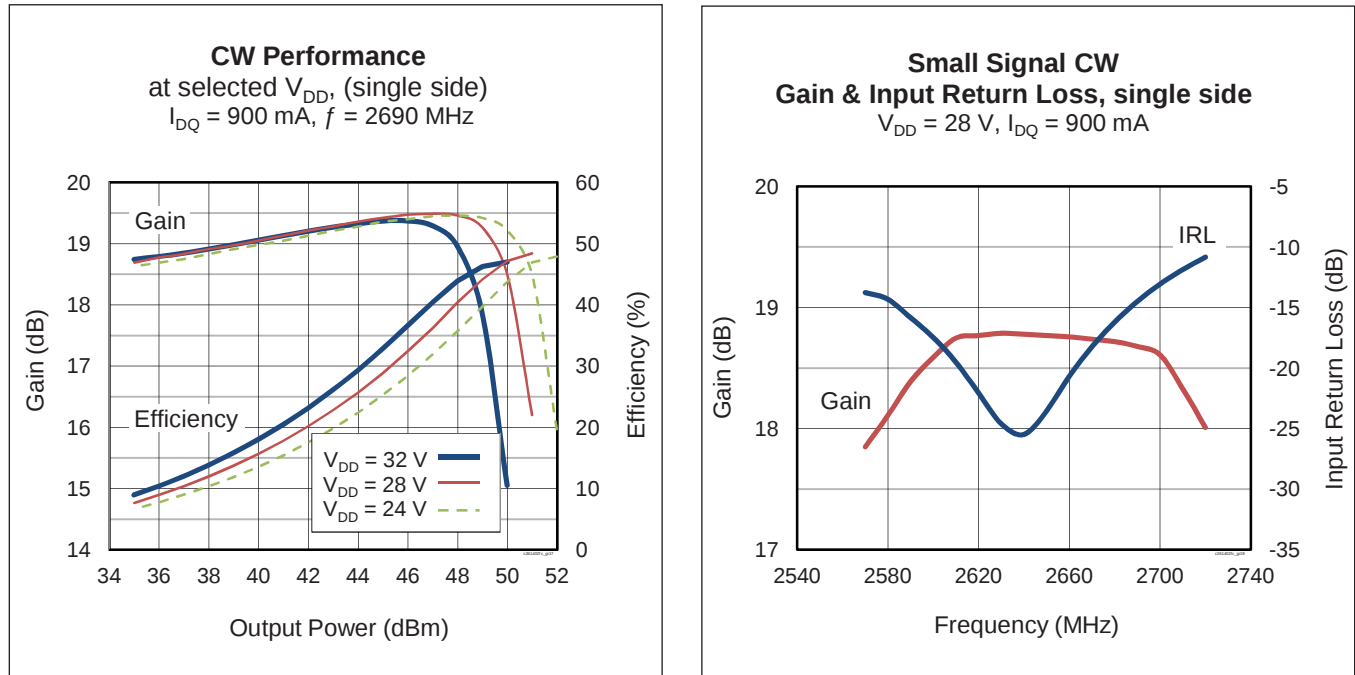

## Load Pull Performance




**Single Side Load Pull Performance** – Pulsed CW signal: 16  $\mu\text{sec}$ , 10% duty cycle; 28 V, 450 mA

| Class AB   |                         | P <sub>1dB</sub>        |           |                        |                      |       |                         |           |                        |                      |       |
|------------|-------------------------|-------------------------|-----------|------------------------|----------------------|-------|-------------------------|-----------|------------------------|----------------------|-------|
|            |                         | Max Output Power        |           |                        |                      |       | Max PAE                 |           |                        |                      |       |
| Freq [MHz] | Z <sub>s</sub> $\Omega$ | Z <sub>L</sub> $\Omega$ | Gain [dB] | P <sub>OUT</sub> [dBm] | P <sub>OUT</sub> [W] | PAE % | Z <sub>L</sub> $\Omega$ | Gain [dB] | P <sub>OUT</sub> [dBm] | P <sub>OUT</sub> [W] | PAE % |
| 2620       | 12.1 – j1.0             | 2.0 – j8.8              | 15.8      | 50.01                  | 100                  | 53.9  | 3.8 – j7.4              | 18        | 48.39                  | 69                   | 60.2  |
| 2655       | 15.7 – j0.2             | 2.0 – j9.0              | 15.7      | 49.98                  | 99                   | 53.2  | 3.5 – j7.7              | 17.9      | 48.50                  | 71                   | 59.5  |
| 2690       | 17.8 – j12.4            | 2.0 – j9.2              | 15.7      | 49.79                  | 95                   | 51.3  | 3.6 – j7.8              | 18.1      | 48.38                  | 69                   | 58.8  |

## Reference Circuit

|                                                                                                                                                       |                                                                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| DUT                                                                                                                                                   | PTFC261402FC                                                           |
| Test Fixture Part No.                                                                                                                                 | LTN/PTFC261402FC                                                       |
| PCB                                                                                                                                                   | Rogers 4350, 0.508 mm [.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$ |
| Find Gerber files for this test fixture on the Infineon Web site at ( <a href="http://www.infineon.com/rfpower">http://www.infineon.com/rfpower</a> ) |                                                                        |

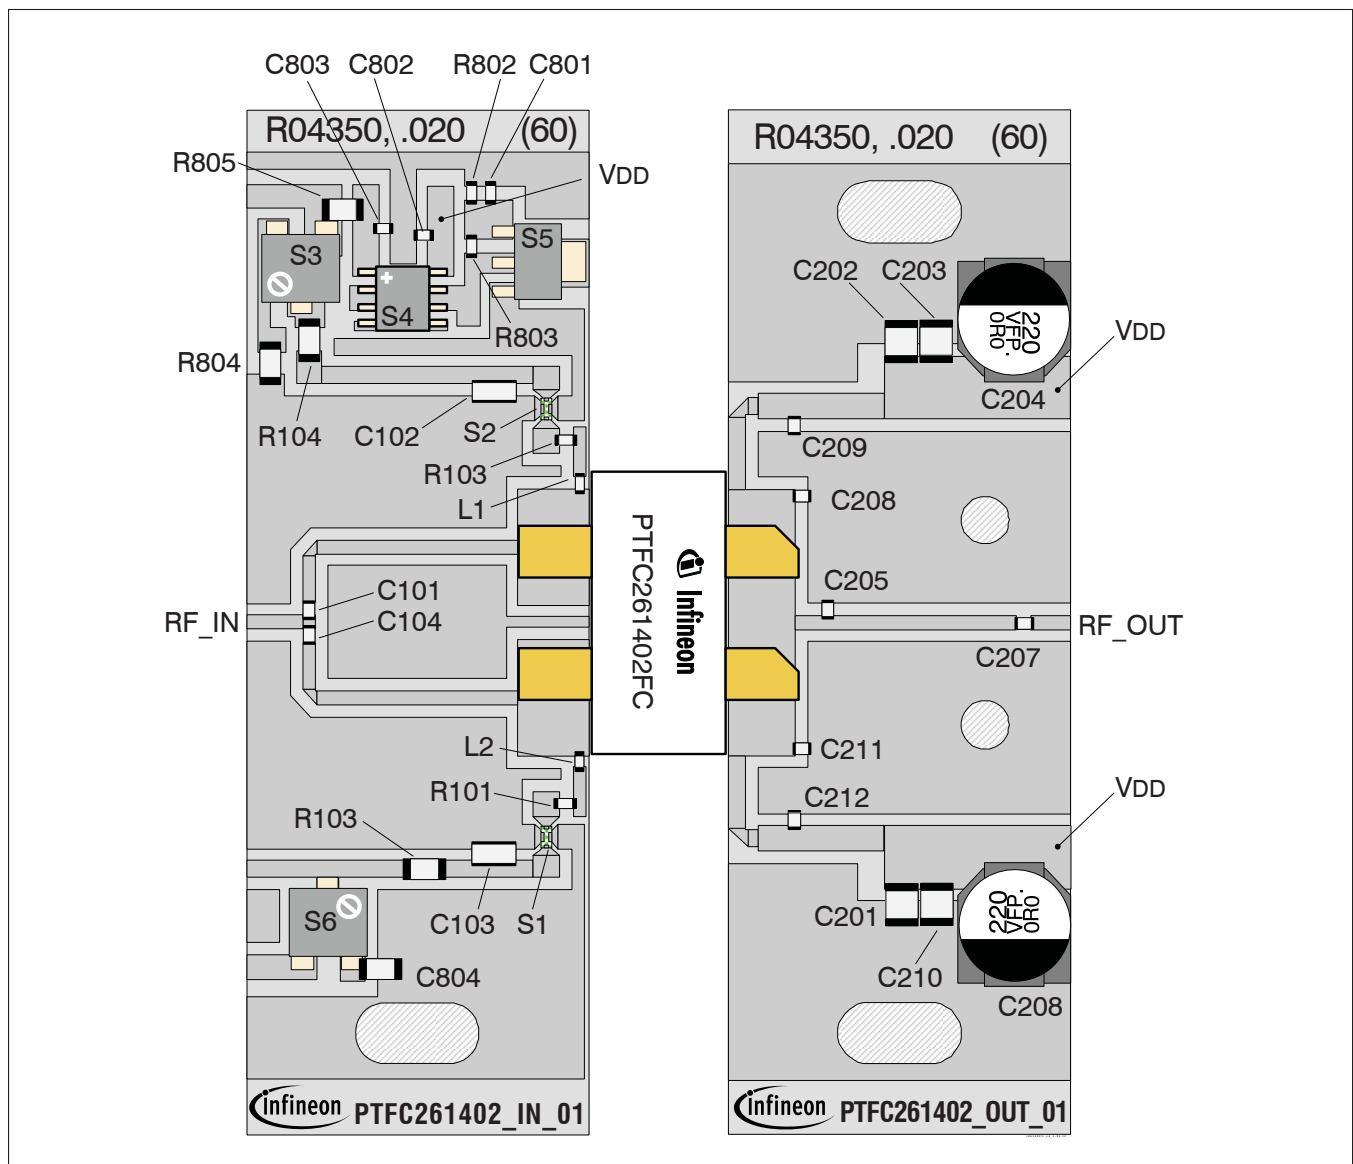


Reference circuit assembly diagram (not to scale)

## Reference Circuit (cont.)

### Components Information

| Component              | Description                          | Suggested Supplier               | P/N                |
|------------------------|--------------------------------------|----------------------------------|--------------------|
| <b>Input</b>           |                                      |                                  |                    |
| C101, C104             | Chip capacitor, 10 pF                | ATC                              | ATC800A100JT       |
| C102, C103             | Capacitor, 10 $\mu$ F                | Murata Electronics North America | LLL31BC70G106MA01L |
| C801, C802, C803       | Capacitor, 1 nF                      | Panasonic                        | ECJ-1VB1H102K      |
| L1, L2                 | Chip inductor, 47 nH                 | Coilcraft                        | 0603HP-47NXJLU     |
| R101, R102             | Resistor, 10 W                       | Panasonic Electronic Components  | ERJ-3GEYJ100V      |
| R103, R104             | Resistor, 10 W                       | Panasonic Electronic Components  | ERJ-8GEYJ100V      |
| R801, R804             | Resistor, 1k W                       | Panasonic Electronic Components  | ERJ-8GEYJ102V      |
| R802                   | Resistor, 1.3k W                     | Panasonic Electronic Components  | ERJ-3GEYJ132V      |
| R803                   | Resistor, 1.2k W                     | Panasonic Electronic Components  | ERJ-3GEYJ122V      |
| S1, S2                 | High frequency EMI filter, 1 $\mu$ F | Murata Electronics North America | NFM18PS105R0J3D    |
| S3                     | Potentiometer, 2k $\Omega$           | Bourns Inc.                      | 3224W-1-202E       |
| S4                     | Voltage Regulator                    | National Semiconductor           | LM7805             |
| S5                     | Transistor                           | Infineon Technologies            | BCP56              |
| <b>Output</b>          |                                      |                                  |                    |
| C201, C202, C203, C210 | Capacitor, 10 $\mu$ F                | Taiyo Yuden                      | UMK325C7106MM-T    |
| C204, C208             | Electrolytic capacitor, 220 $\mu$ F  | Panasonic Electronic Components  | EEE-FP1V221AP      |
| C205, C206             | Chip capacitor, 1 pF                 | ATC                              | ATC800A1R2BT       |
| C206, C211             | Chip capacitor, 2 pF                 | ATC                              | ATC800A1R6BT       |
| C207                   | Chip capacitor, 8 pF                 | ATC                              | ATC800A8R2CT       |
| C209, C212             | Chip capacitor, 10 pF                | ATC                              | ATC800A100JT       |

## Package Outline Specifications

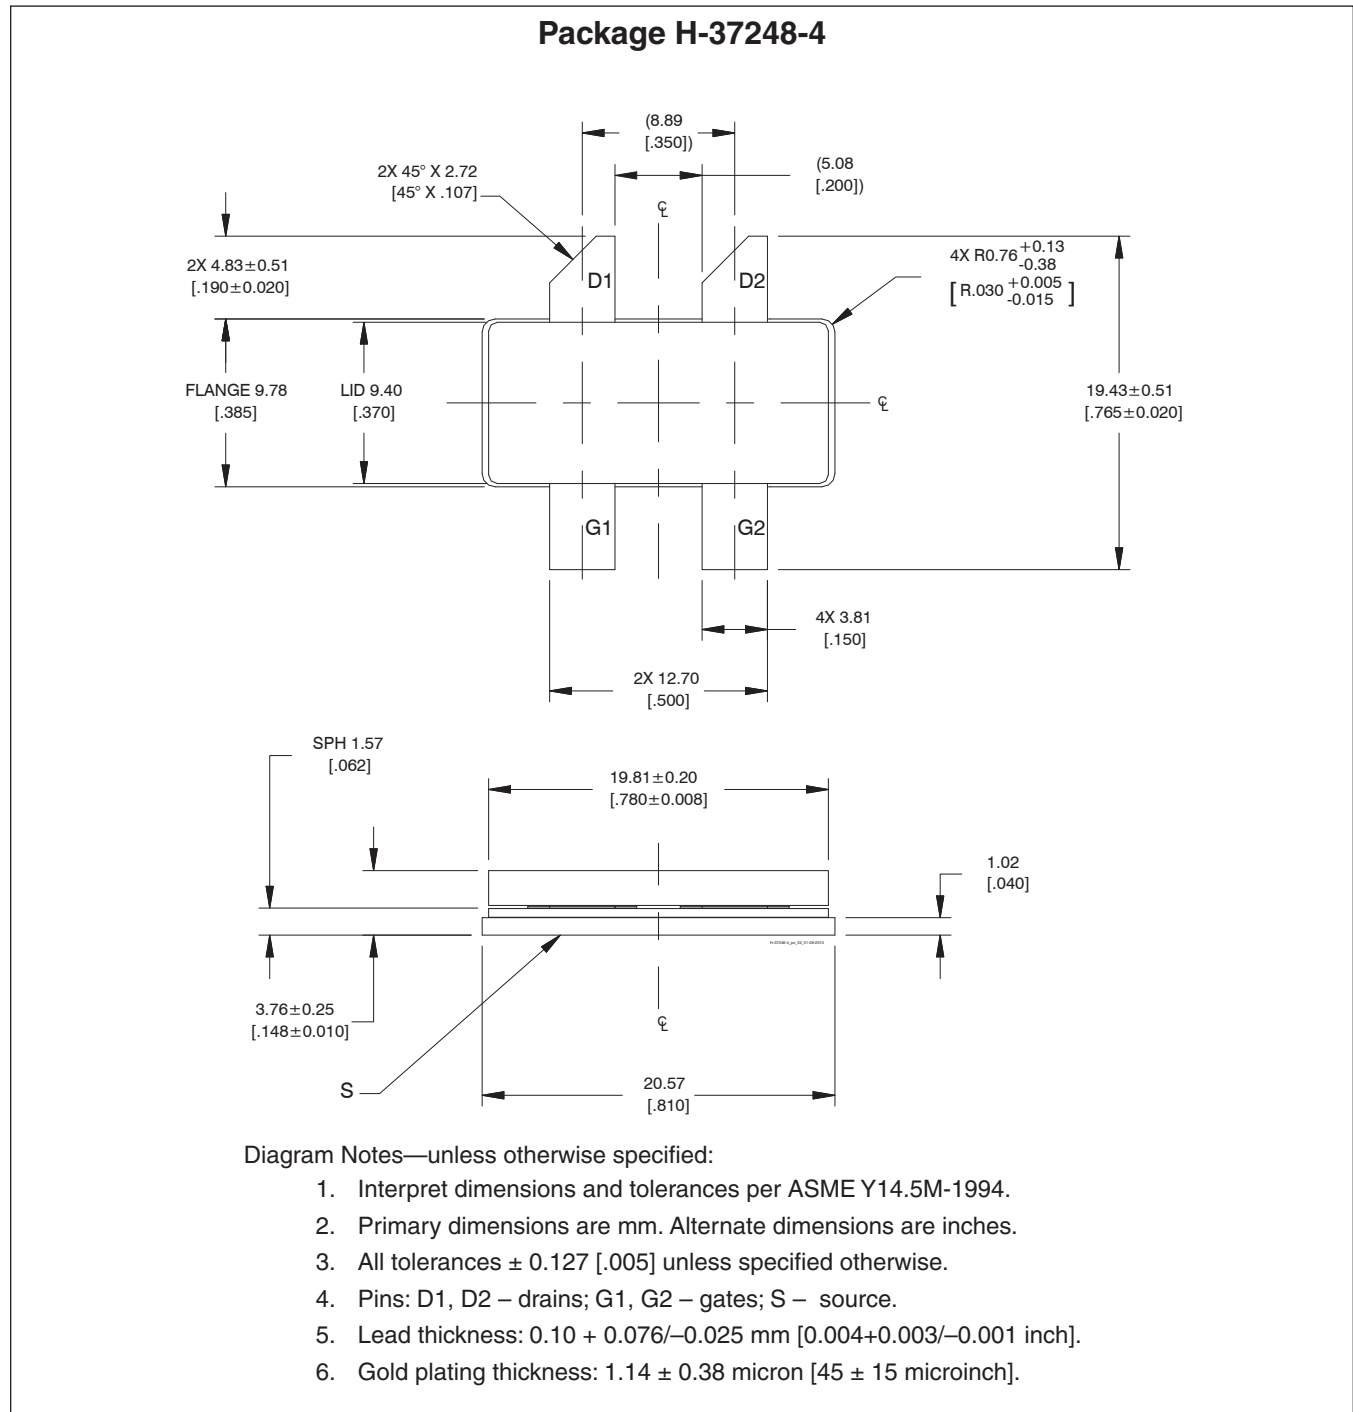

Find the latest and most complete information about products and packaging at the Infineon Internet page (<http://www.infineon.com/rfpower>)

## Revision History

| Revision | Date       | Data Sheet  | Page   | Subjects (major changes since last revision)                                              |
|----------|------------|-------------|--------|-------------------------------------------------------------------------------------------|
| 01       | 2011-11-10 | Advance     | All    | Data Sheet reflects advance specification for product development.                        |
| 02       | 2012-04-27 | Preliminary | 1, 2   | Specifications updated.                                                                   |
| 03       | 2012-06-01 | Advance     | all    | Reformat to Advance Specification—Marketing survey only.                                  |
| 04       | 2014-02-14 | Production  | all    | Data Sheet reflects released product specification.                                       |
| 05       | 2016-06-21 | Production  | 1<br>2 | Added ESD rating<br>Maximum junction temperature raised to 225 °C, updated ordering info. |

### We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?  
Your feedback will help us to continuously improve the quality of this document.  
Please send your proposal (including a reference to this document) to:

[highpowerRF@infineon.com](mailto:highpowerRF@infineon.com)

To request other information, contact us at:  
+1 877 465 3667 (1-877-GO-LDMOS) USA  
or +1 408 776 0600 International



**Edition 2016-06-21**

**Published by**  
**Infineon Technologies AG**  
**85579 Neubiberg, Germany**

**© 2011 Infineon Technologies AG**  
**All Rights Reserved.**

### Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

### Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com/rfpower](http://www.infineon.com/rfpower)).

### Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[PTFC261402FCV1R250XTMA1](#) [PTFC261402FCV1XWSA1](#)