

# General Specifications

## Electrical Capacity (Resistive Load)

|                             |                |
|-----------------------------|----------------|
| <b>Switching Rating:</b>    | 100mA @ 5V DC  |
| <b>Nonswitching Rating:</b> | 100mA @ 50V DC |

## Other Ratings

|                               |                                                               |
|-------------------------------|---------------------------------------------------------------|
| <b>Contact Resistance:</b>    | 100 milliohms maximum; 30 milliohms maximum for contact point |
| <b>Insulation Resistance:</b> | 1,000 megohms minimum @ 250V DC                               |
| <b>Dielectric Strength:</b>   | 250V AC minimum for 1 minute minimum                          |
| <b>Mechanical Life:</b>       | 10,000 detent operations minimum                              |
| <b>Electrical Life:</b>       | 10,000 detent operations minimum                              |

Notes: A detent operation is one actuator position operation or stepping.

A cycle is one 360° rotation. 10,000 detent operations equal 625 cycles for hexadecimal devices or 1,000 cycles for decimal devices.

|                                  |                                                                                                                                                                    |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Nominal Operating Torque:</b> | Metal Shaft: 0.009Nm for decimal devices; 0.011Nm for hexadecimal devices<br>All other Actuator types: 0.008Nm for decimal devices; 0.01Nm for hexadecimal devices |
| <b>Contact Timing:</b>           | Nonshorting                                                                                                                                                        |

## Materials & Finishes

|                             |                                                                                                                                                 |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Actuators:</b>           | Screwdriver and Plastic Shaft - Glass fiber reinforced polyamide (UL94V-0);<br>Dial - Polyoxymethylene; Metal Shaft - Brass with nickel plating |
| <b>Bushing :</b>            | Brass with nickel plating (for Metal Shaft model)                                                                                               |
| <b>Outer Case:</b>          | Glass fiber reinforced PBT (for Metal Shaft model)                                                                                              |
| <b>Housing &amp; Base:</b>  | Glass fiber reinforced polyamide (UL94V-0)                                                                                                      |
| <b>Movable Contacts:</b>    | Copper alloy with gold plating                                                                                                                  |
| <b>Stationary Contacts:</b> | Phosphor bronze with gold plating                                                                                                               |
| <b>Terminals:</b>           | Phosphor bronze with gold plating                                                                                                               |
| <b>Terminal Cover:</b>      | Polyamide (Right angle model only)                                                                                                              |
| <b>Bracket:</b>             | Phosphor bronze with tin plating (for Metal Shaft model)                                                                                        |

## Environmental Data

|                                     |                                                                                                                                               |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Operating Temperature Range:</b> | -25°C through +85°C (-13°F through +185°F)                                                                                                    |
| <b>Humidity:</b>                    | 90 ~ 95% humidity for 240 hours @ 40°C (104°F)                                                                                                |
| <b>Vibration:</b>                   | 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 5 minutes; 3 right angled directions for 2 hours |
| <b>Shock:</b>                       | 50G (490m/s <sup>2</sup> ) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)                                |

## Processing

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Soldering:</b> | Wave Soldering Recommended. See Profile A in Supplement section.<br>Manual Soldering: See Profile A in Supplement section.<br>Note: During soldering process, set the switch to the following position:<br>FR01FR10P, FR01FR16P, FR01KR10P, FR01KR16P, FR01SR10P, FR01SR16P,<br>FR01AR10PB, FR01AR16PB, FR01AR10HB, FR01AR16HB: 0 position;<br>FR01FC10P, FR01KC10P, FR01FC10H, FR01KC10H,<br>FR01SC10P, FR01AC10PB, FR01AC10HB: 7 position;<br>FR01FC16P, FR01KC16P, FR01FC16H, FR01KC16H,<br>FR01SC16P, FR01AC16PB, FR01AC16HB: F position |
| <b>Cleaning:</b>  | These devices are not process sealed. Hand clean locally using alcohol based solution.<br>Custom process sealed version available; contact factory.                                                                                                                                                                                                                                                                                                                                                                                          |

## Standards & Certifications

|                                |                                                                                                                                                                                                                                                                                         |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Flammability Standards:</b> | UL94V-0 rated actuator, housing and base<br>The FR01 Series rotaries have not been tested for UL recognition or CSA certification.<br>These switches are designed for use in a low-voltage, low-current circuit.<br>When used as intended, the results do not produce hazardous energy. |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

# Distinctive Characteristics

Compact dimensions and low profile allow high density mounting and close stacking of PC boards.

Highly visible legends and choice of screwdriver, shaft or dial actuators with arrow position indication provide trouble-free code setting. Knob actuator also available.

Real or complement code setting identified by color-keyed actuator.


Detent mechanism gives crisp, positive action for accurate switch setting.

Crimped terminals ensure secure PC mounting and prevent dislodging during soldering.


Cam activated movable contact and gold contacts assure contact reliability and continuity.

Surface mount model with screwdriver actuation available and shown in the surface mount section.


Contact factory for custom models with .200" (5.08mm) terminal spacing.

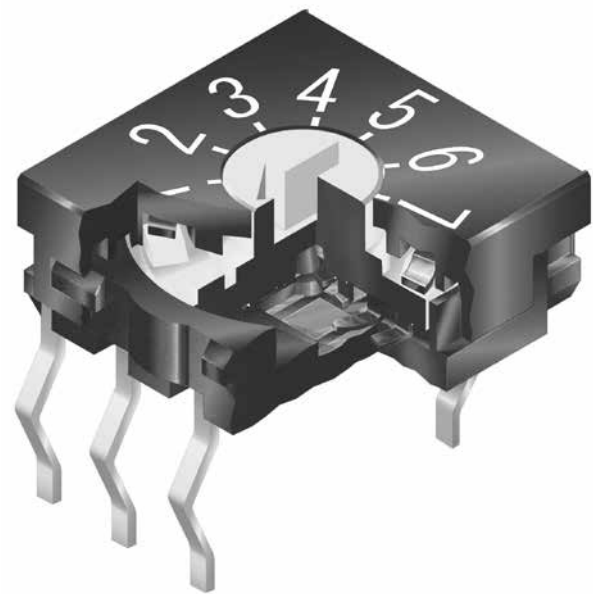

Actual Size




TYPICAL SWITCH ORDERING EXAMPLE

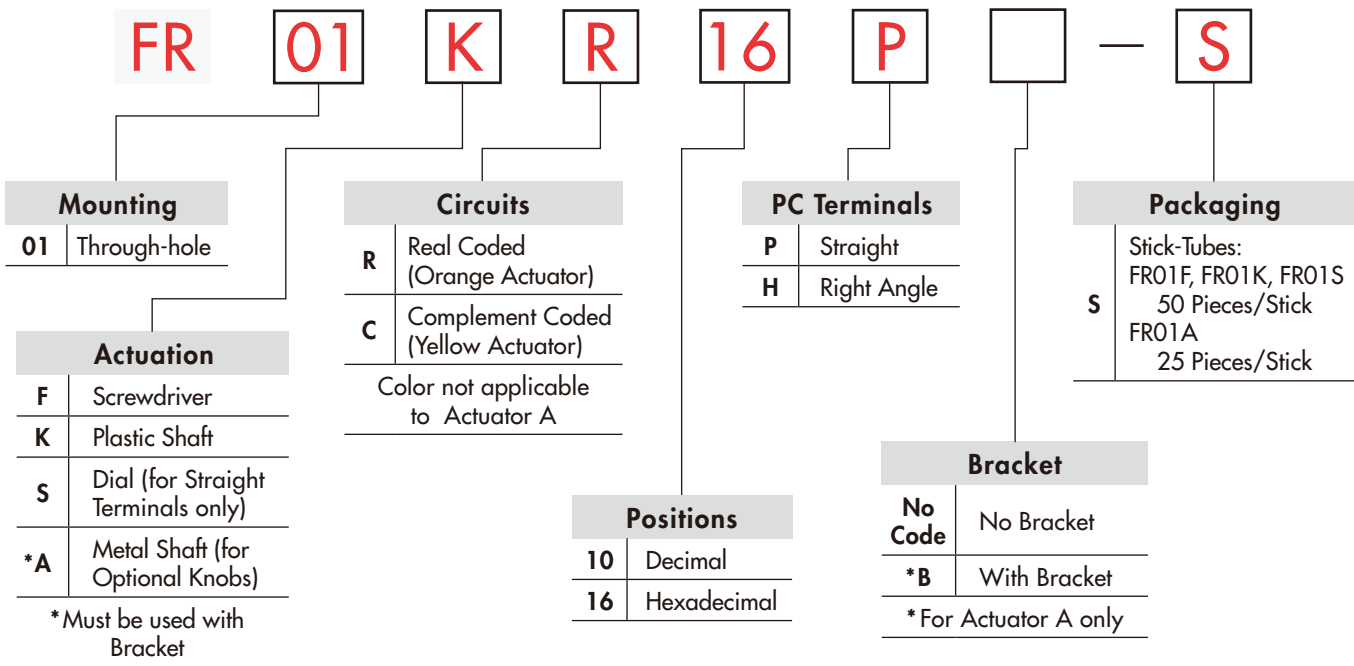

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

FR01KR16P-S

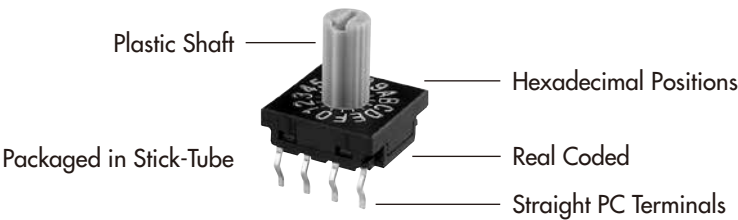


MOUNTING

01 Through-hole

ACTUATION


F Screwdriver

Adjusted with a flat tipped screwdriver



AT4180  
Optional Snap-on Knob

Polyamide  
Black knob with transparent flange

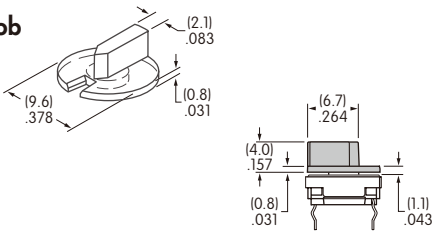


Actuators are fully rotational either clockwise or counterclockwise.  
Actuator Colors: Orange for real coded devices; Yellow for complement coded devices.

Install knob before mounting on PCB for right angle type; it should not be removed once mounted. When mounting, align slit in knob with arrowhead on actuator.


## ACTUATION

**Plastic Shaft**


Adjusted by hand  
or with flat tipped  
screwdriver

**Dial**

Adjusted by hand  
or with flat tipped  
screwdriver

**Metal Shaft**

Knob options  
illustrated below  
with color choices

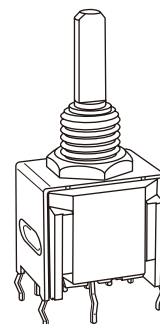

Actuators are fully rotational and operate either clockwise or counterclockwise.  
Colors for Actuators K and S: Orange for real coded devices; Yellow for complement coded devices


Mounting hardware is available if needed for models with Actuator A:  
Hexagon Nut AT513M, Locking Ring AT515M, and Lockwasher AT509; all are shown in the Accessories and Hardware section.

## OPTIONAL KNOBS FOR METAL SHAFT

**AT433  
Plain Black**


Material:  
Polyacetal

Color:  
Black

**AT4103 Small  
Color Tipped**


Polyester Base:  
Black

Polyamide Tip  
Colors:  
A, B, C, E, F, G, H

**AT4104 Large  
Color Tipped**

Polyester Base:  
Black

Polyamide Tip  
Colors:  
A, B, C, E, F, G, H



Knob Orientation: When installed with shaft flat rotated 180° from bushing flat as shown in "Typical Switch Dimensions," white line on cap points to Actuator Position 0 noted in truth tables below.

**Color Codes:**    **A** Black    **B** White    **C** Red    **E** Yellow    **F** Green    **G** Blue    **H** Gray

## TRUTH TABLES (CIRCUITS &amp; POSITIONS)


| Actuator Position<br>● = ON                                                      |   | 10 Decimal |   |   |   |   |   |   |   |   |   | 16 Hexadecimal |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|----------------------------------------------------------------------------------|---|------------|---|---|---|---|---|---|---|---|---|----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|                                                                                  |   | 0          | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 0              | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | A | B | C | D | E | F |
| <b>R</b> Real Coded<br>Model Numbers:<br>FR01FR, FR01KR,<br>FR01SR, FR01AR       | 1 |            | ● |   | ● |   | ● |   | ● |   | ● |                | ● |   | ● |   | ● |   | ● |   | ● |   | ● |   | ● |   | ● |
|                                                                                  | 2 |            |   | ● | ● |   |   | ● | ● |   |   |                | ● | ● |   |   | ● | ● |   |   |   | ● | ● |   |   | ● | ● |
|                                                                                  | 4 |            |   |   |   | ● | ● |   | ● |   |   |                |   |   | ● | ● | ● | ● |   |   |   |   | ● | ● | ● | ● |   |
|                                                                                  | 8 |            |   |   |   |   |   |   |   | ● | ● |                |   |   |   |   |   |   | ● | ● |   | ● | ● | ● | ● | ● | ● |
| <b>C</b> Complement Coded<br>Model Numbers:<br>FR01FC, FR01KC,<br>FR01SC, FR01AC | 1 | ●          |   | ● |   | ● |   | ● |   | ● |   | ●              |   | ● |   | ● |   | ● |   | ● |   | ● |   | ● |   | ● |   |
|                                                                                  | 2 | ●          | ● |   |   | ● | ● |   | ● | ● |   | ●              | ● |   | ● | ● |   | ● | ● |   | ● | ● |   | ● | ● |   |   |
|                                                                                  | 4 | ●          | ● | ● | ● |   |   |   | ● | ● | ● | ●              | ● | ● |   |   |   |   | ● | ● | ● | ● |   |   |   |   |   |
|                                                                                  | 8 | ●          | ● | ● | ● | ● | ● | ● | ● |   |   | ●              | ● | ● | ● | ● | ● | ● |   |   |   |   |   |   |   |   |   |

Terminal numbers are actually on the switch.  
Above sequence shown for clockwise rotation.


### TYPICAL SWITCH DIMENSIONS

**P**




**Straight PC • Screwdriver**



Decimal




Hexadecimal




FR01FC10P

**H**




**Right Angle PC • Screwdriver**



Decimal




Hexadecimal




FR01FR10H

**P**




**Straight PC • Plastic Shaft**



Decimal




Hexadecimal




FR01KR16P

**H**




**Right Angle PC • Plastic Shaft**



Decimal



Hexadecimal




FR01KC16H

## TYPICAL SWITCH DIMENSIONS

## Straight PC • Dial

P

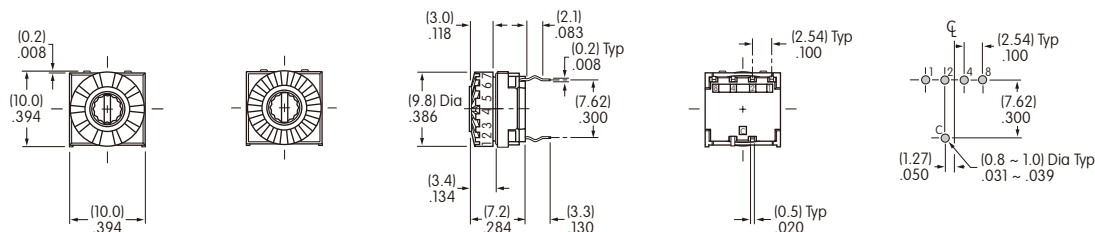


FR01SR10P

Decimal

Hexadecimal

## Straight PC • Metal Shaft

P

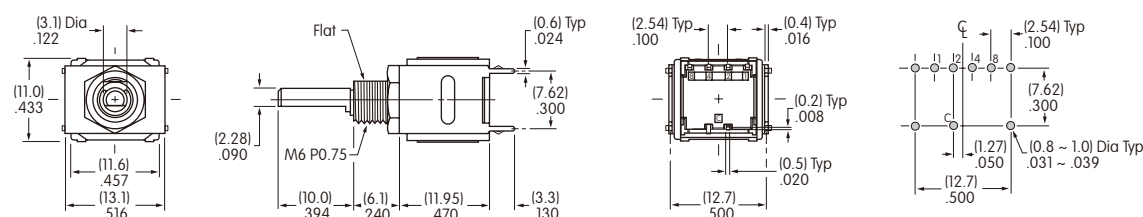


FR01AR10PB

Shown in Position 0 with shaft flat rotated 180° from bushing flat

## Right Angle PC • Metal Shaft

H

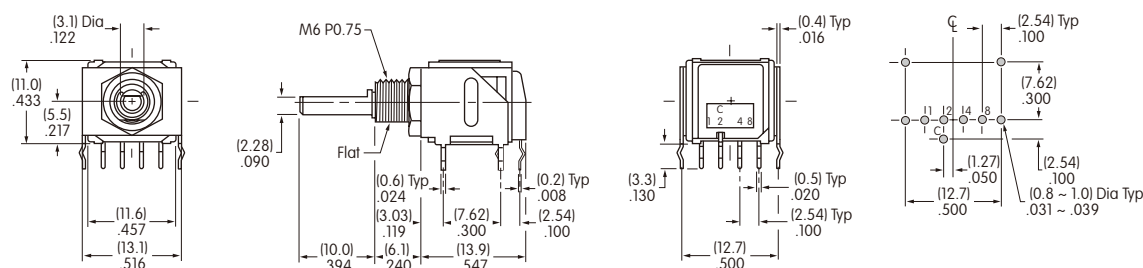

FR01AC16HB

Shown in Position 0 with shaft flat rotated 180° from bushing flat

### PACKAGING

S

#### Stick-Tube

##### FR01F, FR01K & FR01S

Each stick-tube contains 50 switches.  
Switches must be ordered in 50-piece increments.


##### FR01A

Each stick-tube contains 25 switches.  
Switches must be ordered in 25-piece increments.


Note: Transport and storage temperatures should not exceed 50°C (122°F). Store stick tubes on flat surface.




#### FR01F with Screwdriver Actuation & Straight PC

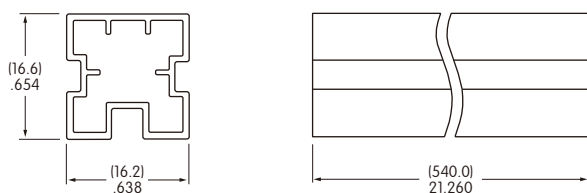


#### FR01K with Plastic Shaft & Right Angle PC

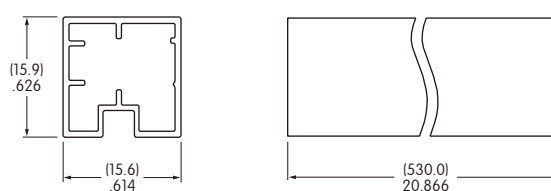

#### FR01S with Dial Actuation & Straight PC

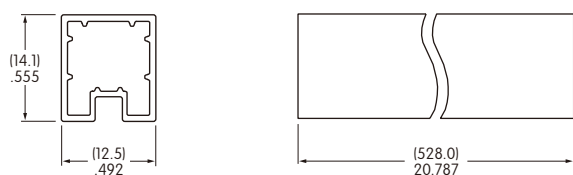

#### FR01A with Metal Shaft & Straight PC

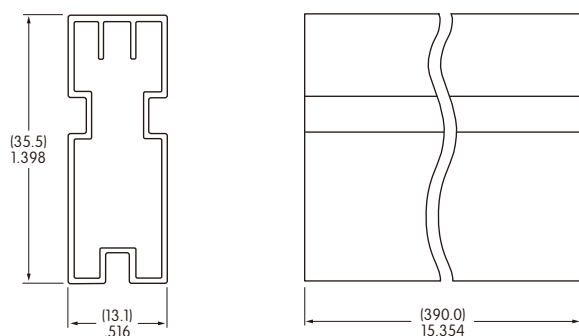

#### FR01A with Metal Shaft & Right Angle PC

