


#### PowerAlert Console Launcher

To address Java Runtime Environment (JRE) issues with respect to the [SNMPWEBCARD](#) web interface, Tripp Lite recommends using the PowerAlert Console Launcher. This application enables local access of the [SNMPWEBCARD](#) using a self-contained, compatible JRE version. The Console Launcher can be downloaded for free from the link above, the [SNMPWEBCARD Support](#) page, or from the Management Solutions / Utilities page.

## 5.7kW 3-Phase Monitored PDU, 208V Outlets (30 C13 & 6 C19), L21-20P, 3ft Cord, 0U Vertical

MODEL NUMBER: PDU3VN3L2120

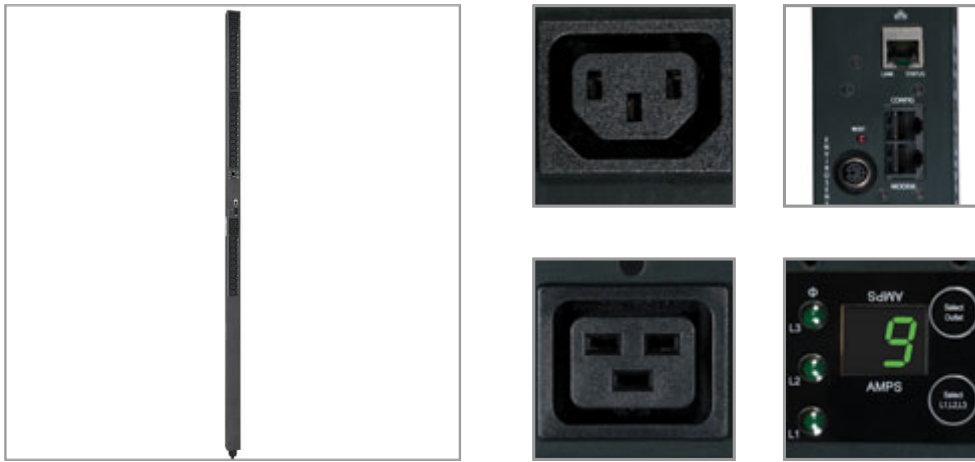

#### Description

Tripp Lite 3 phase Monitored PDU / Power Distribution Unit offers real-time remote monitoring of voltage, frequency and load levels via built-in network connection. PowerAlert interface supports custom notification of user-specified remote conditions via email, secure web, SNMP, Telnet or SSH interface. PDU output current consumption in amps is displayed per-phase via front panel lighted digital display and can be monitored remotely to warn of potential overloads before critical IT mains breakers trip.

#### Features

- 5.7kW 3 phase 208V Monitored Power Distribution Unit / PDU with built-in web/network interface
- Attached NEMA L21-20P 20A (3P+N+E) 208V 3 phase input plug with 3 ft. / 1m cord
- 0U, 70 in. / 178cm vertical form factor supports installation in 2 or 4 post equipment racks
- 36 total 208V outlets (30 C13, 6 C19) arranged in three single phase output load banks
- Lighted display with scroll-button reports power consumption in amps for all 3 loading banks, IP-address self-identification and 180 degree display rotation for overhead or raised floor power feeds
- Built-in SNMP/ethernet interface reports voltage, frequency and PDU loading per-phase via network or secure web browser interface with options for user specified alarm and notification thresholds
- Supports in-rack environmental reporting with optional ENVIROSENSE temperature / humidity sensor and rack access notification with up to 4 optional SRSWITCH door sensors
- DHCP/Manual configuration support
- 10/100 Mbps auto-sensing allows optimal communication with 10/100 Base-T networks

#### Highlights

- Monitored 5.7kW 3 Phase 208V PDU; 70 in. / 178cm 0U vertical rackmount
- Reports voltage, frequency and load per-phase via built in ethernet interface
- Visual current meter; Toolless button-mount installation
- NEMA L21-20P 20A (3P+N+E) 208V 3 phase input; 3 ft. / 1m line cord
- 30 C13 & 6 C19 single phase outlets; Included cord retention brackets
- Temperature, humidity and contact closure monitoring options

#### Package Includes

- Monitored rackmount PDU with pre-installed mounting buttons
- Cord retention brackets
- Spare installation buttons (2 9mm / 4 6mm)
- Rack mounting brackets
- Owner's manual



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
www.tripplite.com

- Real-time clock backup maintains the time of day and date even if the PDU is unpowered
- Tiered access privileges allow an administrator and a guest to login via web browser for monitoring
- Alert notifications via email or SNMP traps offer immediate event notification
- Firmware upgrade ability supports future product enhancements
- Supports HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, SNMPv3, Telnet, SSH, FTP, DHCP, BOOTP, NTP protocols
- Fully compatible with FREE PowerAlert Network Management System / NMS Software
- Included cord retention brackets keep vital network equipment plugged in and continuously powered
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included)

## Specifications

OVERVIEW	
UPC Code	037332158208
PDU Type	Monitored
INPUT	
PDU Input Voltage	208
Recommended Electrical Service	20A 208V with NEMA L21-20R outlet
Maximum Input Amps	16
PDU Plug Type	NEMA L21-20P
Input Phase	3-Phase
Input Cord Details	Cord length specifications are nominal and subject to manufacturing variance
Input Cord Length (ft.)	3
Input Cord Length (m)	0.91
OUTPUT	
Frequency Compatibility	50 / 60 Hz
Output Capacity Details	5.7kW (208V) total capacity / 9.2A max per output phase (L1-L2, L2-L3, L3-L1)
Output Receptacles	(30) C13; (6) C19
Output Nominal Voltage	208
Overload Protection	n/a
USER INTERFACE, ALERTS & CONTROLS	



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Reported Load Segments	Supports local monitoring of current for each output phase (9.2A max per L1-L2, L2-L3, L3-L1 balanced); BANK "L1" is powered by L1-L2 (outlets 1-12); BANK "L2" is powered by L2-L3 (outlets 13-24); BANK "L3" is powered by L3-L1 (outlets 25-36)
Front Panel LCD Display	Digital display reports output load level in amps separately for each output phase; Can also be used to scroll the configured IP address
Front Panel LEDs	Set of 3 LEDs (L1, L2, L3) indicate the output load segment the digital current display is reporting
Switches	SELECT switch advances the digital display and LED to report power consumption for load segments L1, L2 and L3; Press and hold the SELECT switch to rotate the digital display 90 degrees for overhead power input; Press and hold the SCROLL IP button to scroll the configured IP address
<b>PHYSICAL</b>	
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
Material of Construction	Metal
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / cm)	16.79 x 23.50 x 191.69
Shipping Dimensions (hwd / in.)	6.61 x 9.25 x 75.47
Shipping Weight (kg)	6.80
Shipping Weight (lbs.)	15.00
Unit Dimensions (hwd / cm)	177.8 x 5.6 x 4.24
Unit Dimensions (hwd / in.)	70 x 2.19 x 1.67
Unit Weight (kg)	3.27
Unit Weight (lbs.)	7.2
<b>ENVIRONMENTAL</b>	
Storage Temperature Range	5 to 122F (-15 to 50C)
Relative Humidity	5 to 95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
<b>STANDARDS &amp; COMPLIANCE</b>	
Certifications	Tested to UL60950-1 (USA, Canada), NOM (Mexico), Class A (Emissions), ROHS
TAA Compliant Option	TAA Compliant Version Available - Order Tripp Lite PDU3EVN6L2120
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2020 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>