

Data brief

Ultra-low power Bluetooth® low energy microphone based on SPBTLE-1S certified module





Summary table	
BlueNRG-1 very low power Bluetooth low energy single mode system-on-chip embedding a high performance	BlueNRG-1
STSW-BLUEMIC-1 evaluation software package	STSW- BLUEMIC-1
STSW-BLUENRG1-DK software package	STSW- BLUENRG1- DK
MP34DT05-A ultra- compact, low-power, omnidirectional, digital MEMS microphone	MP34DT05-A
LSM6DSL 3-axis accelerometer and gyroscope	LSM6DSL
STEVAL-BLUEMIC-1 evaluation board	STEVAL- BLUEMIC-1

Features

- Bluetooth® SMART small form factor board based on the SPBTLE-1S module, Bluetooth v4.2 compliant
- On-board SPBTLE-1S module, based on BlueNRG-1, Bluetooth low energy application processor system on chip embedding:
 - an ultra-low power ARM[®] Cortex[®]-M0 32-bit core architecture
 - programmable embedded 160 KB Flash
 - 24 KB embedded RAM with data retention
- On-board MP34DT05-A (or MP34DT04-C1 in the first generation board) digital MEMS microphone
- On-board LSM6DSL: MEMS 3D accelerometer (\pm 2 / \pm 4 / \pm 8 / \pm 16 g) plus 3D gyroscope (\pm 125 / \pm 245 / \pm 500 / \pm 1000 / \pm 2000 dps)
- Voltage supply: 1V8 or 3V3
- Battery or USB powered
- 100 mAh Li-Ion battery
- On-board STBC08 linear Li-lon battery charger
- SWD connector
- Included in the development kit package:
 - STEVAL-BLUEMIC-1
 - Plastic box for housing STEVAL-BLUEMIC-1
 - 100 mAh Li-Ion battery
 - SWD programming cable
- SW development kit for audio and inertial MEMS data streaming over BLE
- ST BlueMS: Android and iOS demo App available in the respective stores
- · CE certified
- · RoHS and China RoHS compliant
- Contains Transmitter Module FCC (ID: S9NSPBTLE1S) certified
- Contains Transmitter Module IC (IC: 8976C-SPBTLE1S) certified

Description

The STEVAL-BLUEMIC-1 evaluation board mounts the SPBTLE-1S Bluetooth[®] SMART application processor compliant with BT specification v4.2. It supports multiple simultaneous roles and can act as a Bluetooth Smart master and slave device at the same time.

This BLE wireless battery powered solution also embeds digital MEMS microphone MP34DT05-A (or MP34DT04-C1 in the first generation board) and 3D accelerometer + 3D gyroscope, which render this evaluation board suitable for a wide range of advanced smart applications.

The evaluation board comes with a SW development kit that includes the Bluetooth low energy stack, all the drivers for audio and inertial data acquisition, and button and LED management. A ready-to-use BlueVoice library is included as middleware and a sample application is provided to get you started with voice streaming over BLE to an Android or iOS device, running the ST BlueMS apps.



1 Schematic diagrams


Vout=3V3 R1=147K R2=47K Vout=1V8 R1=150K R2=120K R25 0 0 0 0 ℧. ₹ 7 정춪 Battery Connector 20K LDK120M-R Max200mA OUT 5 88 STBC08PMR GND PAD BAT **Battery Charger** CHRG PWR_ON 7 200 5 SW1 ბ ₹ 25 X v_USB 85 \$ BlueNRG-1 Module Footprint USB, SWD, Battery monitor ANATEST1
DIO10/TMS/SWTDI
DIO9/TCK/SWTCK
DIO11/UART_RXD
DIO8/UART_RXD
DIO6/UART_RTS
GND
DIO7/BOOT/UART_CTS
DIO14/ANATEST0 Battery monitor (4.2V >> 1.8V) ADC IN2 ADC IN1 DIO4/I2C_CLK DIO5/I2C_SDA VBLUE SWD ADC_IN2 R12 105K R11 140K SC_SDA


Figure 1. Power and SPBTLE-1S module


DB3334 - Rev 3 page 2/5



Figure 2. MEMS, button and LEDs

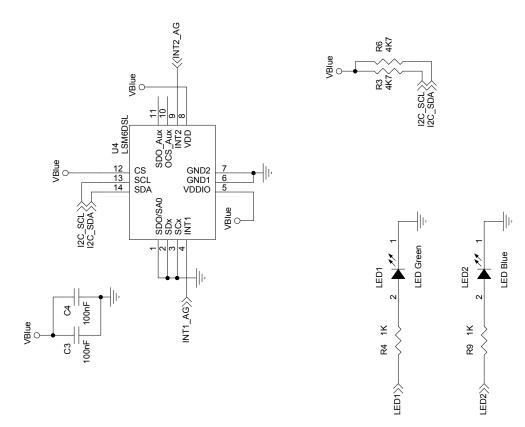

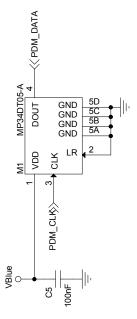



DB3334 - Rev 3 page 3/5



Revision history

Table 1. Document revision history

Date	Version	Changes
18-Jul-2017	1	Initial release.
20-Nov-2017	2	Updated cover page features.
06-Feb-2018	3	Added device summary table in cover page.
		Update schematic diagrams.

DB3334 - Rev 3 page 4/5



IMPORTANT NOTICE - PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved

DB3334 - Rev 3 page 5/5