





A

B


C

D


view shown without plastic pin and grounding

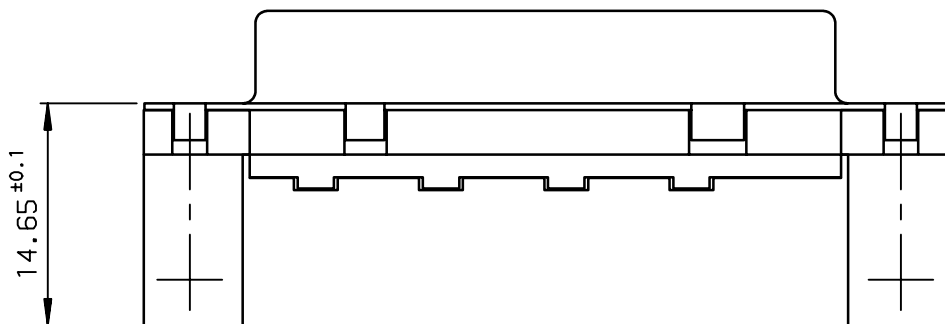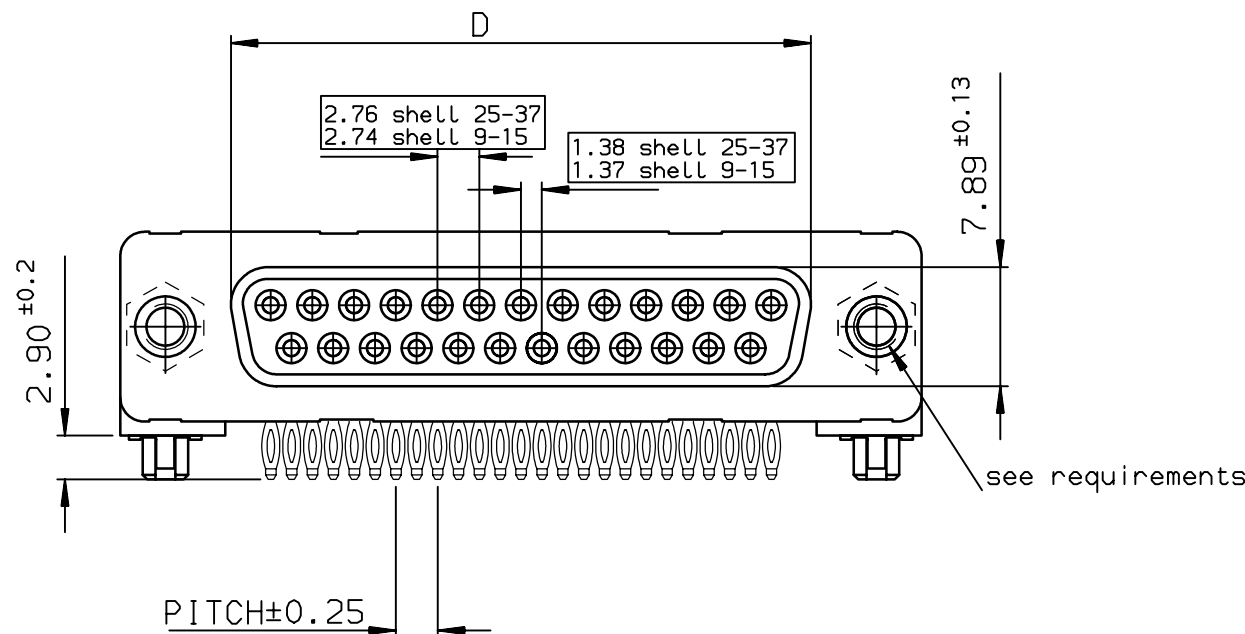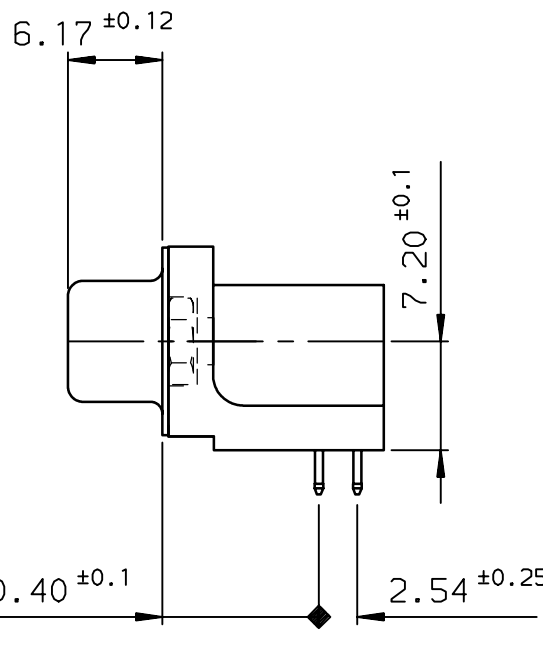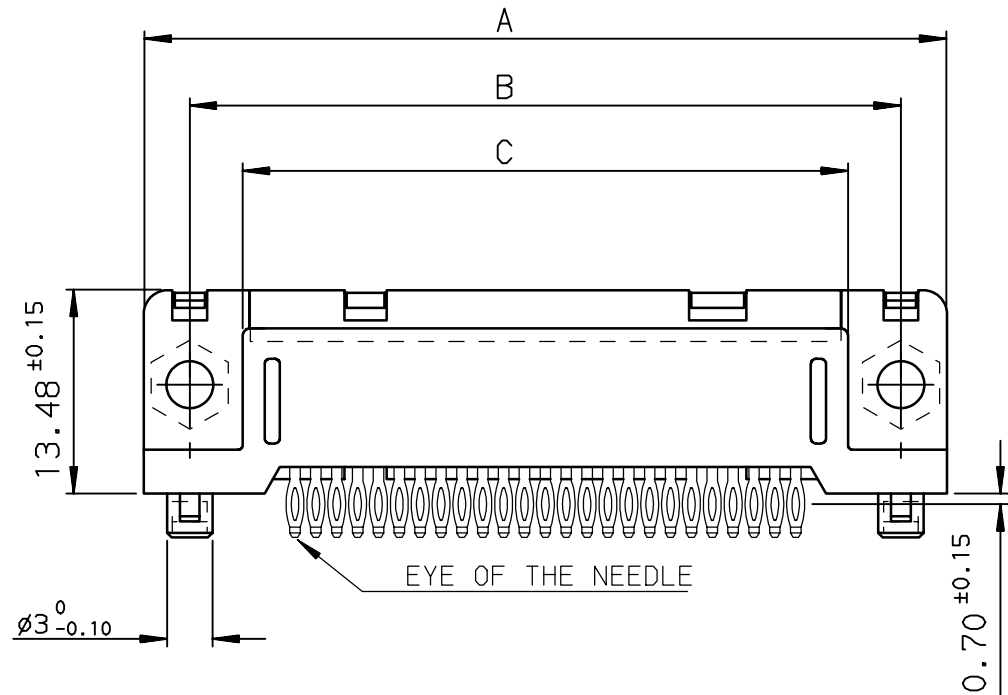

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.20)

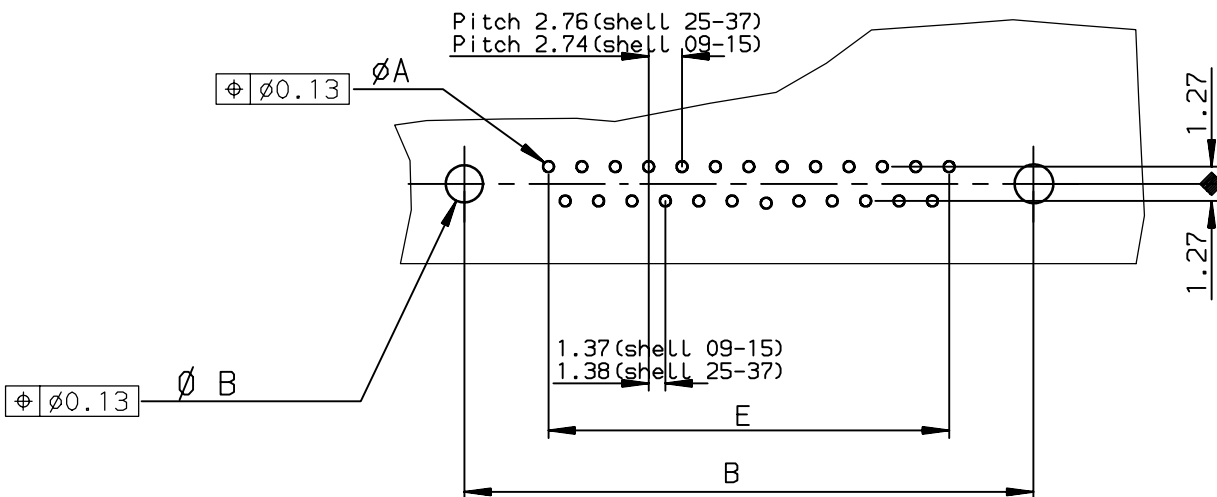

Detail of grounding strip

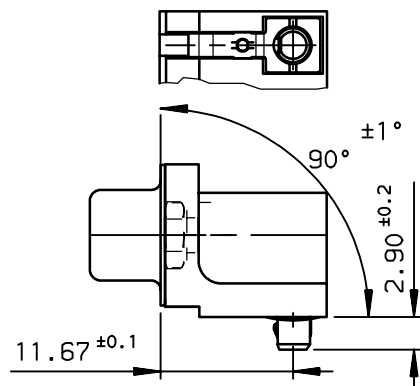

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	TIN LEAD	TIN LEAD	LEAD FREE	LEAD FREE
09	30.81	24.99	18.00	16.21	10.96	D09S81C4GL00	D09S81C6GL00	D09S81C4GL00LF	D09S81C6GL00LF
15	39.14	33.32	26.32	24.54	19.18	D15S81C4GL00	D15S81C6GL00	D15S81C4GL00LF	D15S81C6GL00LF
25	53.03	47.04	40.04	38.25	33.12	D25S81C4GL00	D25S81C6GL00	D25S81C4GL00LF	D25S81C6GL00LF
37	69.32	63.50	56.50	54.71	49.68	D37S81C4GL00	D37S81C6GL00	D37S81C4GL00LF	D37S81C6GL00LF
						Gold flash	0,76 µ gold	Gold flash	0,76 µ gold

rev	ecn no	dr	date
C	-	MAS	1999/07/09
D	LS05-004	LMA	2005/01/11
E	LS06-0097	LGO	2006/07/28
F	LS06-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101				
			TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	PESSON	1996/12/06	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2	
Eng	PESSON	1996/12/06			0.XX	±0.1			
Chr	LEGARE	—			0.XX' ±2°	0.XXX			±0.1
Appr	LEGARE	1996/12/06	Product family				D-SUB	ECN	LS06-0140
							Spec ref	—	
			title FEMALE CONNECTOR DELTA D EUROPE RIGHT ANGLED PRESS-FIT				dwg no C01-8646-0522	Rev. F	
			catalog no		—		CUSTOMER		sheet 1 of 1