


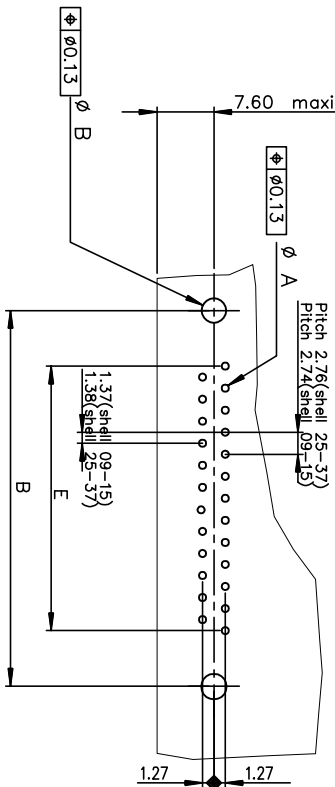

view shown without grounding and plastic pin

PC card drilling dimensions(after plating)

(thickness 1.60 ± 0.10 mm)

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0001

European Views

SHELL	Ad-38	Bd-12	Cd-10	Dd-25	E+0.7	TIN LEAD	TIN LEAD	LEAD FREE	LEAD FREE
09	30.81	24.99	18.00	16.21	10.96	D09S82C4G1.00	D09S82C6G1.00	D09S82C6G1.00	D09S82C6G1.00
15	39.14	33.32	26.32	24.54	19.18	D15S82C4G1.00	D15S82C6G1.00	D15S82C6G1.00	D15S82C6G1.00
25	53.03	47.04	40.04	38.25	33.12	D25S82C4G1.00	D25S82C6G1.00	D25S82C6G1.00	D25S82C6G1.00
37	63.32	63.50	56.50	54.71	49.68	D37S82C4G1.00	D37S82C6G1.00	D37S82C6G1.00	D37S82C6G1.00
						Cold flash	0.76 » gold	Cold flash	0.76 » gold

[illegible]

rev	ech no	dr	date
G	-	MAS	1999/07/23
H	LS05-004	LMA	2005/01/11
J	LS06-0097	LGO	2006/07/29
K	LS06-0140	LGO	2006/09/22
L	109-0120	AS	2009/06/27
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	✓	tolerance std ISO 406 ISO 1101	projection 	mm 
		TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	PESSON	1994/03/16	ANGULAR			
Eng	PESSON	1994/03/16	LINEAR	0.xx	±0.1	size
Chr	ANSH SALAM	2009/06/27		0.xx	±0.1	A3
Appr	ANSH SALAM	2009/06/27	max ±2	0.xxx	±0.1	Scale 2
			Product family		D-SUB	Spec ref -
						109-0120

	
FEMALE CONNECTOR DELTA D EUROSTYLE RIGHT ANGLED PRESS-FIT	Rev.
dwg no C01-8646-0227	L
catalog no -	CUSTOMER sheet 1 of 1