
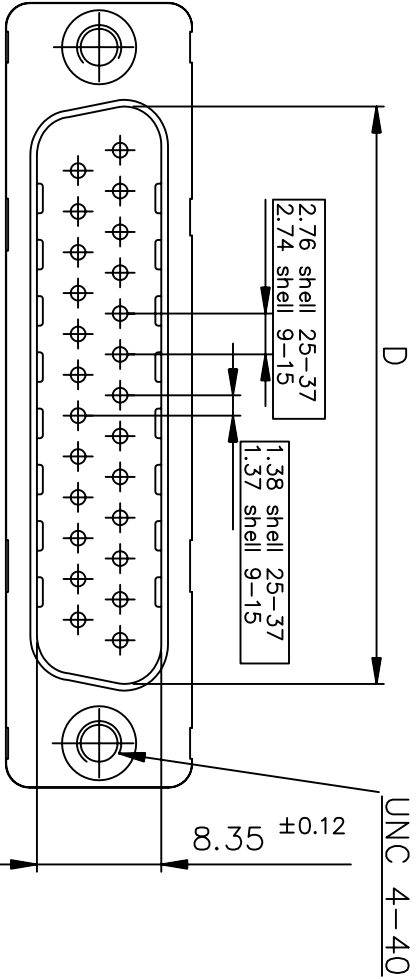


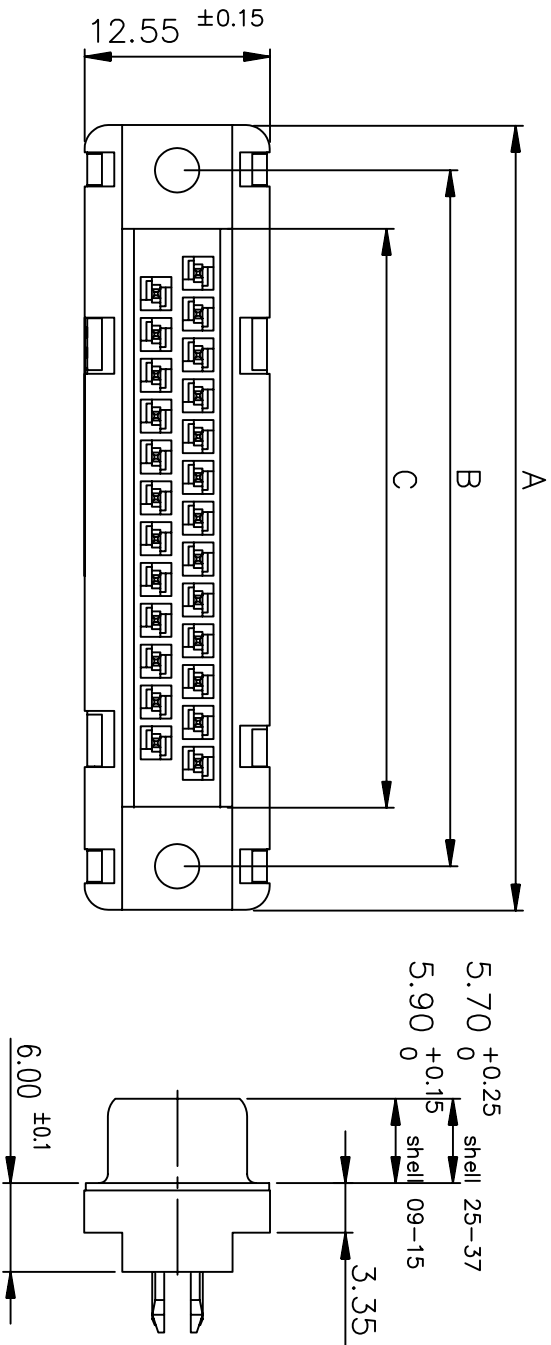

TIN LEAD PART NUMBER

| SHELL | A±0.38 | B±0.12 | C±0.10 | D±0.25 | E±0.07 | PART NUMBER  |
|-------|--------|--------|--------|--------|--------|--------------|
| 09    | 30.81  | 24.99  | 16.96  | 16.79  | 10.96  | D09P24A.GX00 |
| 15    | 39.14  | 33.32  | 25.18  | 25.12  | 19.18  | D15P24A.GX00 |
| 25    | 53.03  | 47.04  | 39.12  | 38.84  | 33.12  | D25P24A.GX00 |
| 37    | 69.32  | 63.50  | 55.68  | 55.30  | 49.68  | D37P24A.GX00 |

Protection: 4 ---> flash AU

6 ---> 0.76µ AU

LEAD FREE PART NUMBER

| SHELL | A±0.38 | B±0.12 | C±0.10 | D±0.25 | E±0.07 | PART NUMBER    |
|-------|--------|--------|--------|--------|--------|----------------|
| 09    | 30.81  | 24.99  | 16.96  | 16.79  | 10.96  | D09P24A.GX00LF |
| 15    | 39.14  | 33.32  | 25.18  | 25.12  | 19.18  | D15P24A.GX00LF |
| 25    | 53.03  | 47.04  | 39.12  | 38.84  | 33.12  | D25P24A.GX00LF |
| 37    | 69.32  | 63.50  | 55.68  | 55.30  | 49.68  | D37P24A.GX00LF |

Protection: 4 ---> flash AU

6 ---> 0.76µ AU


GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C01-8646-0000


European Views

|                    |          |            |                                       |                                   |                  |      |          |
|--------------------|----------|------------|---------------------------------------|-----------------------------------|------------------|------|----------|
| www.fciconnect.com |          |            | surface<br>ISO 1302                   | tolerance std<br>ISO 406 ISO 1101 | projection       | mm   |          |
|                    |          |            | TOLERANCES UNLESS OTHERWISE SPECIFIED |                                   |                  |      | Scale    |
| Dr                 | LELEON   | 1992/09/10 | ANGULAR                               | 0.X                               | ±0.1             | size | 2        |
| Eng                | PESSON   | 1992/09/10 | LINEAR                                | 0.XX                              | ±0.1             | A3   |          |
| Chr                | NIRMAL.G | 2010-02-03 | 0.XX' ±2°                             | 0.XXX                             | ±0.1             | ECN  | 110-0038 |
| Appr               | SUDHIR.V | 2010-02-03 | Product family                        |                                   | D-SUB Spec ref - |      |          |

|                          |   |                           |  |              |
|--------------------------|---|---------------------------|--|--------------|
| FCI                      |   | MALE CONNECTOR DELTA D ST |  | Rev.         |
| straight,solder type for |   | C01-8646-0101             |  | J            |
| catalog no               | - | CUSTOMER                  |  | sheet 1 of 1 |

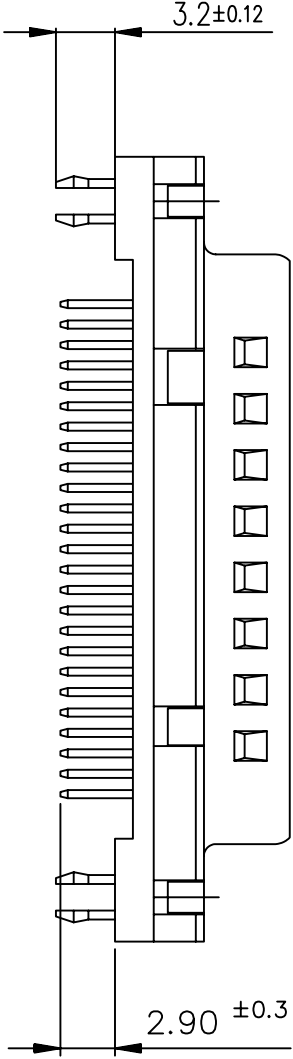

PC card drilling dimensions(after plating)  
(thickness 1.60±0.20mm)

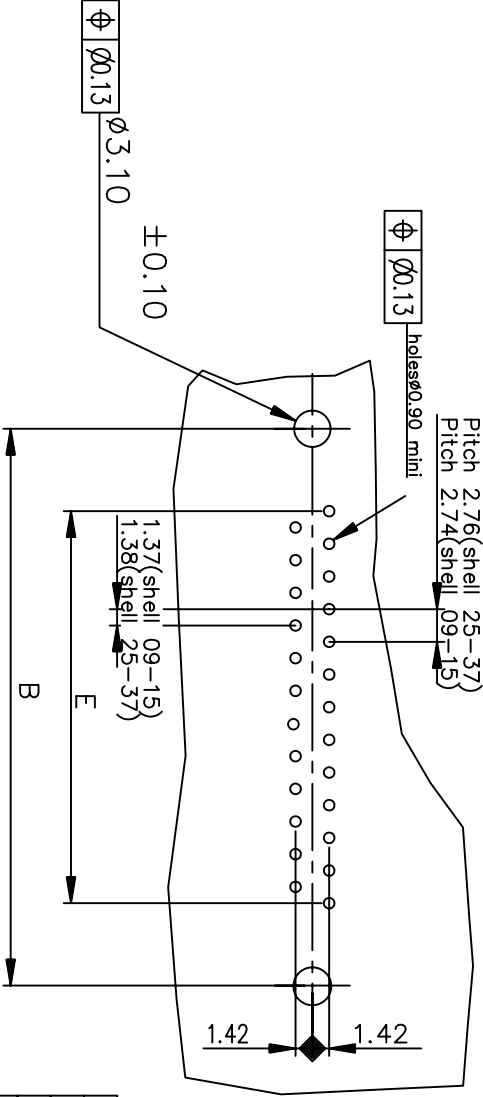

Copyright FCI.