
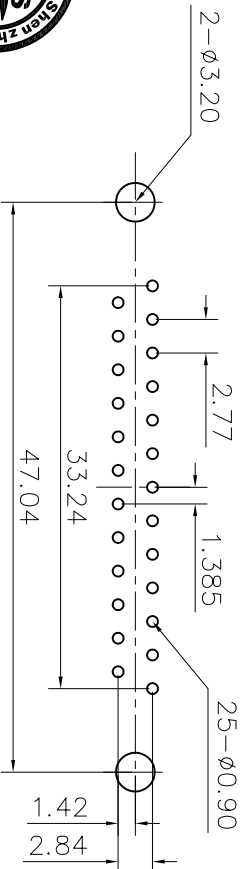


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be distributed, reproduced or used, in whole or in part, without the prior written consent of Amphenol Corporation without its prior consent. All rights are reserved. It is not to be used for any other purpose than that for which it was intended or to use any information in this document.

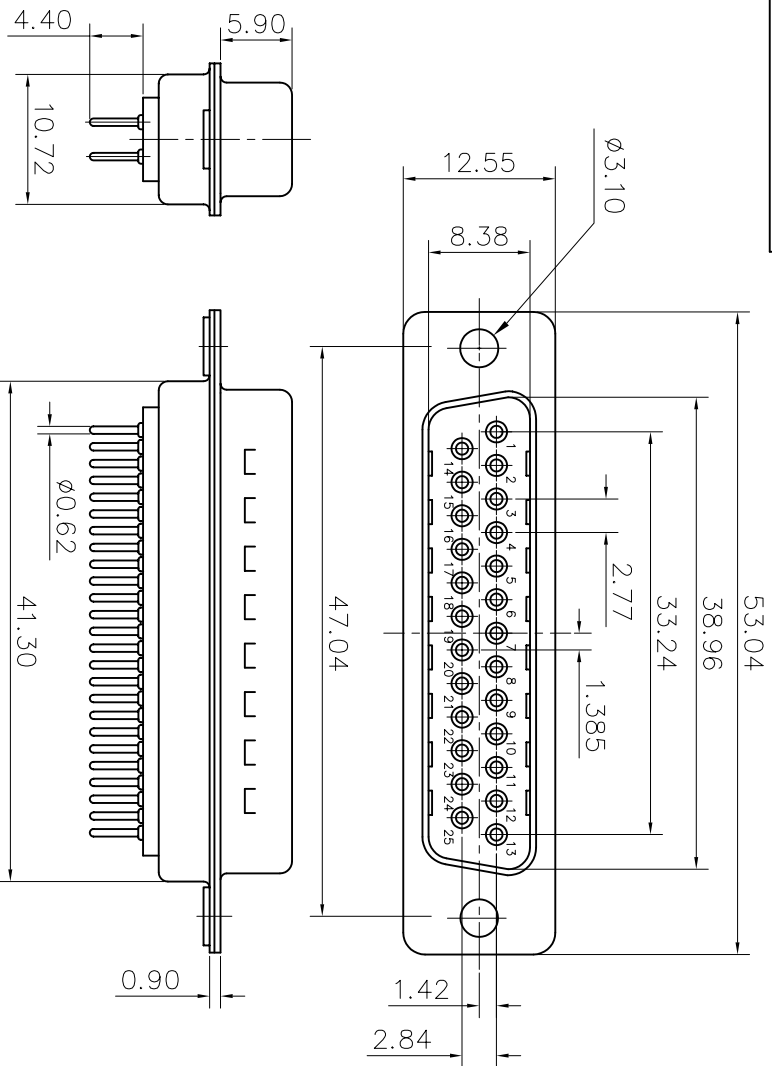

RECOMMENDED P.C.B LAYOUT

(TOLERANCE +/−0.03)

Customer drawing


REVISIONS			
SN	EDN	DESCRIPTION	DATE
A			10/19/07

D-SUB TECHNICAL DATA

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel
BODY : Glass filled thermoplastic.
Flame retarding to UL94 V-0 Color Black
CONTACTS : Brass.
Gold flash over 1.25um (50u") min nickel
ELECTRICAL : Voltage rating :1000 V RMS at 50 Hz
Current rating 3A.
Insulation resistance >1000 M Ohms
Contact resistance 20 mOhms max.
CLIMATIC : Temperature range −55 °C up to 125°C
MARKING : Amphenol...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 717 SD B 25 P0L2

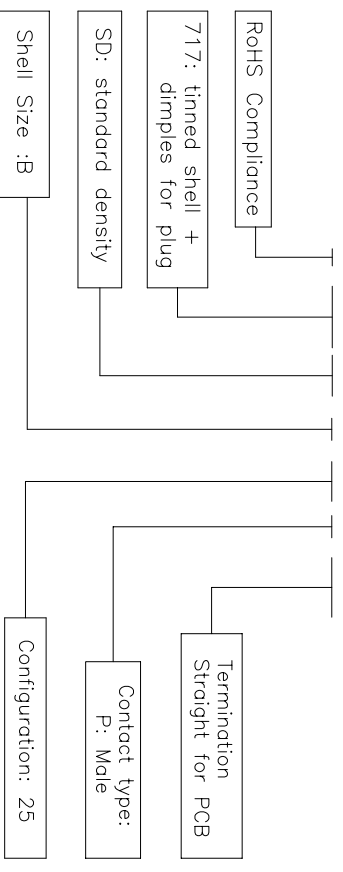

DIMENSIONS SPECIFIED			
TOLERANCES	U.S.	METRIC	APPROVAL
.X	+/-	0.50	DATE
.XX	+/-	0.30	Drawn and 10/19/07
.XXX	+/-	0.20	CHECKED 10/19/07
ANGLES	+/-	2°	
FOR MATERIALS AND FINISHES			
REMOVE SHARP EDGES			
DIMENSIONS			
THICKNESS	THICKNESS	ANGLE OF PROJECTION	
METRIC	MM		
TITLE			
Stamped and Formed connector, SD series			
SIZE DRAWING NO.			
A4	C	L717SDB25P0L2	REV.
SCALE	NONE	SHEET 1 OF 1	A