


Front View

Conn1.




Front View



Conn2.





Conn1.

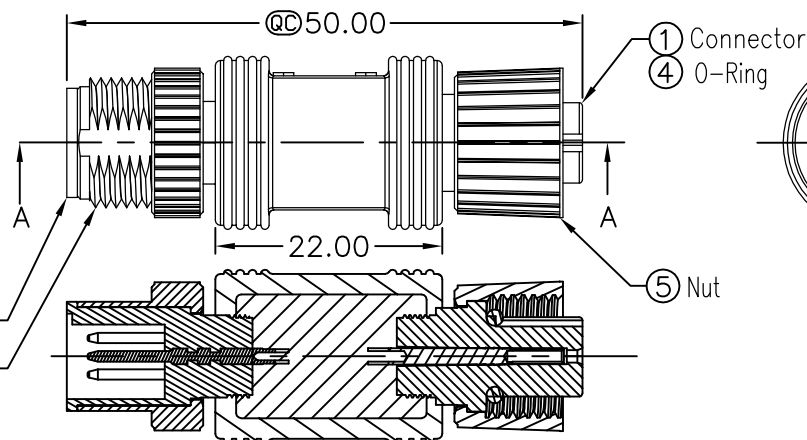

Section A-A

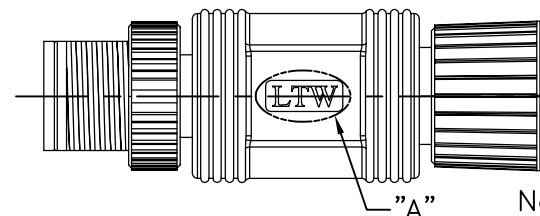

Conn2.



Note:

- * **Ⓚ Important Dimension.**
- * Waterproof Rate: IP68
- * Connector: Black, PU
- * Female Pin: Copper Alloy, Gold Plated
- * Resistor: 1/4W, 120ohm±5% Resistance,
Molded Inside The Connector.
- * Text Depth : 0.3 mm
- * Wire Harness:UL1007/TR64 22AWG,
OD=0.76mm

Blue 藍 (22AWG)	5	5
White 白 (22AWG)	4	4
Black 黑 (22AWG)	3	3
Red 紅 (22AWG)	2	2
Green 綠 (22AWG)	1	1
Wire Color	Conn.1	Conn.2

Pin	Out
1	5V
2	NC
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	NC
12	NC
13	NC
14	NC
15	NC
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	NC
24	NC
25	NC
26	NC
27	NC
28	NC
29	NC
30	NC
31	NC
32	NC
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	NC
40	NC
41	NC
42	NC
43	NC
44	NC
45	NC
46	NC
47	NC
48	NC
49	NC
50	NC
51	NC
52	NC
53	NC
54	NC
55	NC
56	NC
57	NC
58	NC
59	NC
60	NC
61	NC
62	NC
63	NC
64	NC
65	NC
66	NC
67	NC
68	NC
69	NC
70	NC
71	NC
72	NC
73	NC
74	NC
75	NC
76	NC
77	NC
78	NC
79	NC
80	NC
81	NC
82	NC
83	NC
84	NC
85	NC
86	NC
87	NC
88	NC
89	NC
90	NC
91	NC
92	NC
93	NC
94	NC
95	NC
96	NC
97	NC
98	NC
99	NC
100	NC

TITLE		NMEA2000 MICRO-C INLINE RESISTOR	
SCALE		Free	SHEET OF
REV.	A	SIZE	A4
		Ⓢ : Inspection Item	

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	MC-000505-0MF-IS001
DWG NO	MC-000505-0MF-IS001
CUSTOMER	

1	DRAWN BY Cloud	DATE 2008/04/08
1	CHECKED BY EZ	DATE 2008/04/09
	APPROVED BY Luke	DATE 2008/04/10