


A B C D E F




DATE BY	REVISION

CONFIGURATION: TWISTED PAIR AND ONE BY ONE

HPDB50M HPDB50M

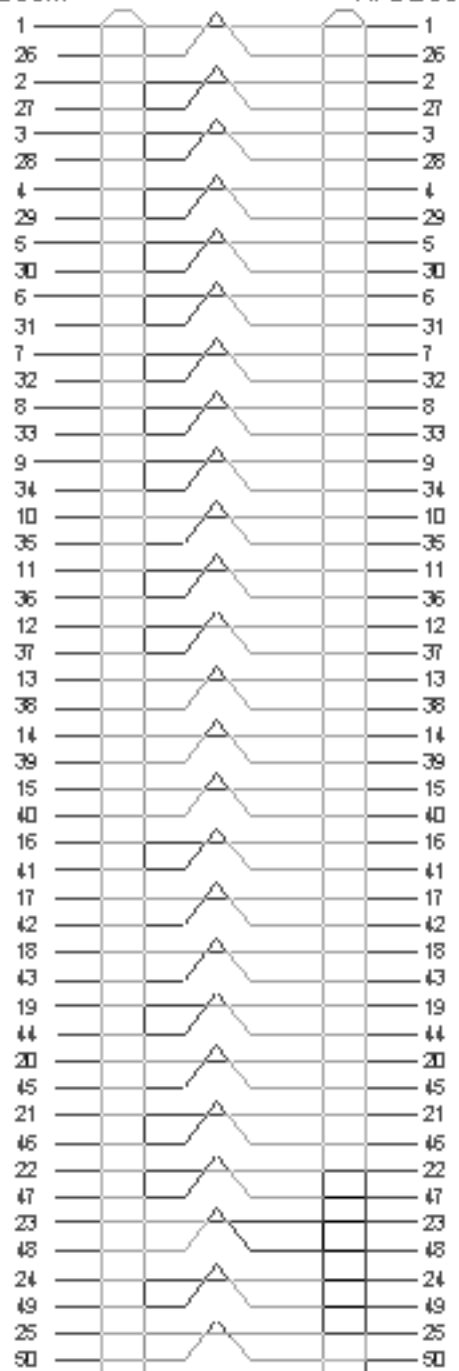

HPDB50 MALE

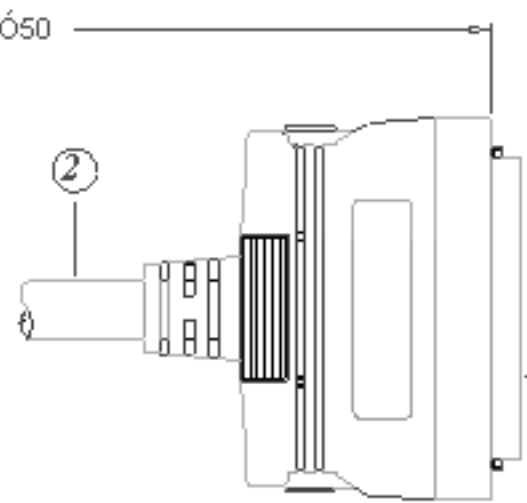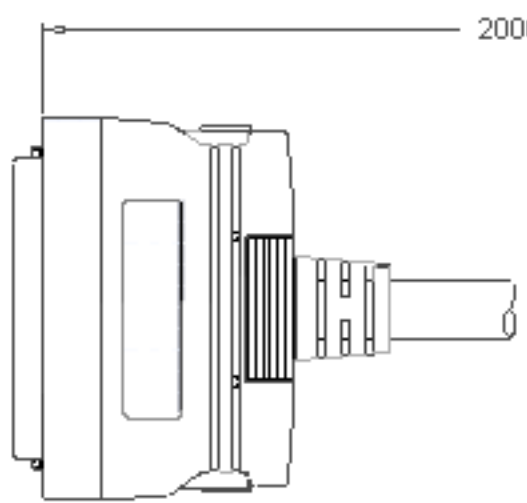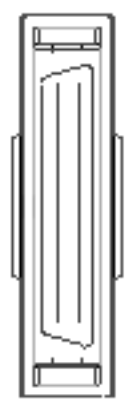

HPDB50 MALE



MAT'L:

- 1.CABLE:#28,UL2919,25P+1+AL/MY+B,O.D:9.5
INSULATION OF CONDUCTOR WITH P.P(Ø0.75)
- 2.CONNECTOR:HPDB50M,I.D.C
- 3.COPPER TAPE:(10 X 105)+(25 X 85)

NOTE:

- 1.TOTAL LENGTH:2000±50mm
- 2.COLOR:BEIGE
- 3.MOLDED TYPE
- 4.360° SOLDER

SHIELD (BRAID) SHIELD

YF000379

②	#28,UL2919,25P+1+AL/MY+B,O.D:9.5,BEIGE	2M
①	HPDB50M,I.D.C	2
NO	DESCRIPTION	QTY

DATE	30 MAY,2000	PARTS NO	SC2301M
UNIT	MM	DRAWN NO	001016
SCALE		BUYER NO	002

TITLE:	HPDB50 MALE-HPDB50 MALE (MOLDED TYPE) AK579/F-2 2M
--------	--

DRAWN	Y.C.C 5/30	CHECK		APPRO	
ASSMANN ELECTRONICS,INC					