






P1	P2
1 BLACK	4
2 RED	3
3 GREEN	2
4 YELLOW	1

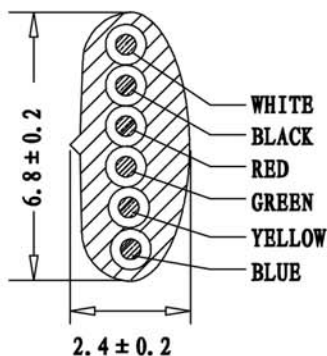


P1	P2
1 WHITE	6
2 BLACK	5
3 RED	4
4 GREEN	3
5 YELLOW	2
6 BLUE	1



P1	P2
1 WHITE	8
2 ORANGE	7
3 BLACK	6
4 RED	5
5 GREEN	4
6 YELLOW	3
7 BLUE	2
8 BROWN	1

*** CONDUCTOR: [26AWG (0.16/7) BARE COPPER]
 INSULATION: [PP6331 ID: 0.95 ± 0.03]
 JACKET: PVC NOUL 65P

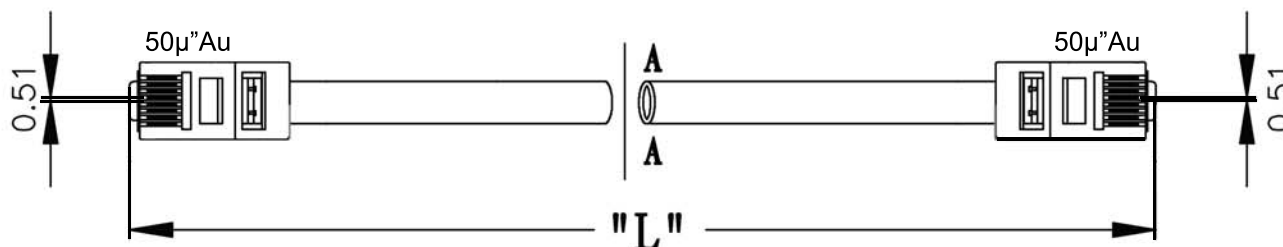

LENGTH "L"
Xft +/- x (Xmm +/- x)
5FT (1525 ± 20)
7FT (2135 ± 30)
10FT (3050 ± 60)
12FT (3660 ± 60)
14FT (4270 ± 60)
25FT (7625 ± 100)

HOW TO ORDER : AT-S-26-X/X/X-X-R

CONDUCTORS
4, 6, 8

LENGTH
5, 7, 10, 12, 14, 25,
50 FEET

B - BLACK
W - WHITE
S - SILVER

RoHS
Compliant

ITEM NO

AT-S-26-X/X/X-X-R

TITLE

Standard Double Ended Flat

ASSMANN
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283

Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED
 © Copyright 2008 by Assmann Electronic Components
 All International Rights Reserved