



# P2

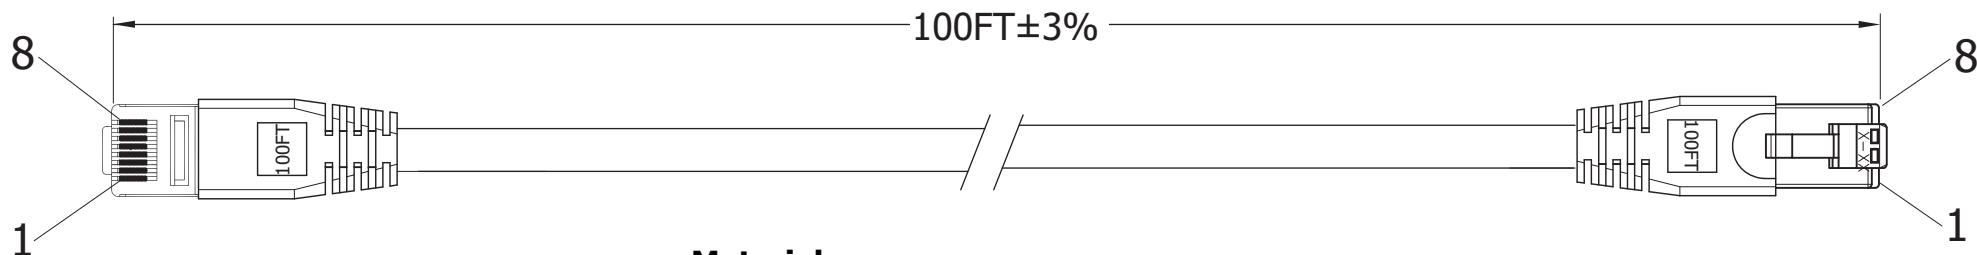


# P1

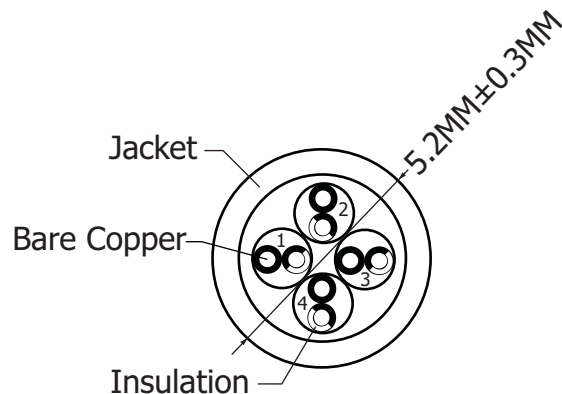

| 1             | 2             | 3             | 4             |
|---------------|---------------|---------------|---------------|
| BLU<br>WH/BLU | ORG<br>WH/ORG | GRN<br>WH/GRN | BWN<br>WH/BWN |

### Material:

- 4x2, 24AWG, twisted pair, 7\*0.19±0.15MM  
- OD: 5.2MM±0.30MM
- Insulation: HDPE-8380
- Jacket: PVC
- Contact Plug: UTP RJ45, 50μ"
- 568B Color wire standard
- Molded snagless boot with strain relief
- Spot length on boot
- Connection: 1:1

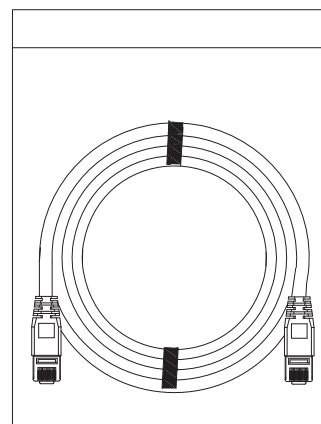

20 cables per carton



### PIN OUT

| P1 | 568B Color   | P2 |
|----|--------------|----|
| 1  | White/Orange | 1  |
| 2  | Orange       | 2  |
| 3  | White/Green  | 3  |
| 4  | Blue         | 4  |
| 5  | White/Blue   | 5  |
| 6  | Green        | 6  |
| 7  | White/Brown  | 7  |
| 8  | Brown        | 8  |

**RoHS**  
Compliant

ITEM NO.

## DK-1511-100/BL

TITLE CAT5e Patch Cord - Unshielded, Booted, 100 Feet,  
UTP, 24AWG, Contact Plating 50μ" of Gold, Black

# ASSMANN

Electronics, Inc.

1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283  
Toll Free: 1-877-277-6266 • Email: [info@usa-assmann.com](mailto:info@usa-assmann.com)

THIS DRAWING IS UNPUBLISHED  
©Copyright 2010 by Assmann Electronic Components  
All International Rights Reserved