
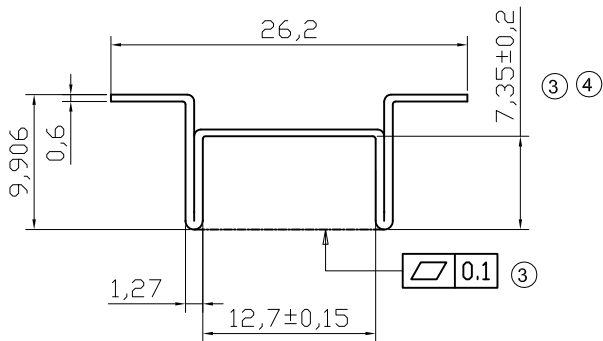
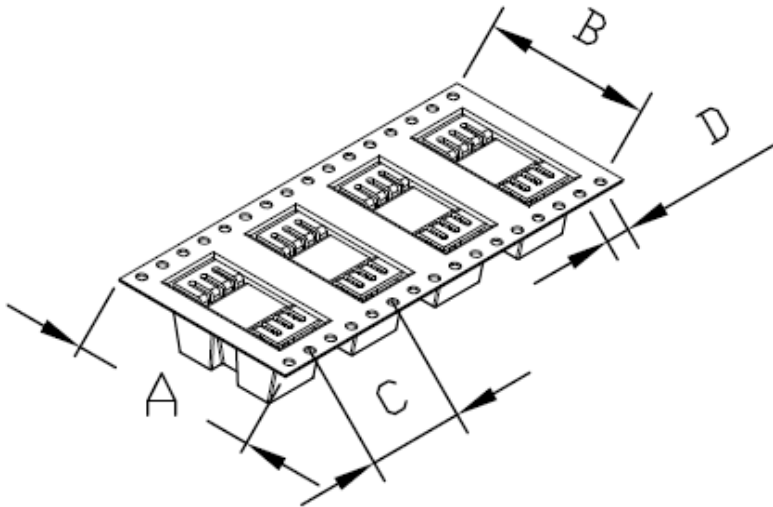



	1	2	3	4	5	6	7	
A								A
B								B
C								C
D								D
E								E
F								F
G								G
H								H
	1	2	3	4	5	6	7	

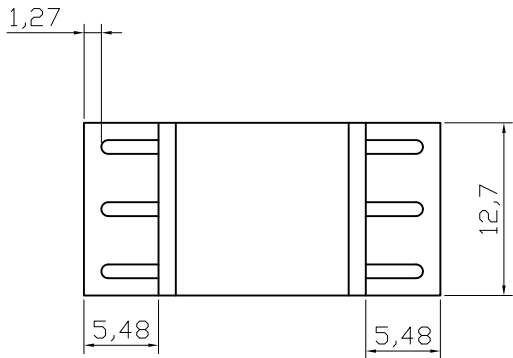

Toleranes: unless otherwise
specificied ±0,3

Material: Coper, 06mm thick
Finished: Tin plated

③ Tape & Reel
1Reel = 250PCS

A	B	C	D
44,0	40,40	24,0	4,0

Option Option	Verpackung Packaging	Warmewiderstand Thermal resistance (K/W)
-	Tape & Reel 250 pcs/reel	23
L	Loose Bulk	23

RoHS compliant

Unit: mm

⑥	Change production plant	23.09.2013	Amy		Date	Name
⑤	Modify drawing layout	10.03.2010	Alex	Drawn	19.06.02	Hellwig
④	change dimension	27.07.09	N.Schulz	Approved	23.09.2013	Amy
③	Update	14.05.09	N.Schulz			
②	Update	19.06.02	N.Schulz			
①	Neuanlage	19.06.02	N.Schulz			
Id.	Modification	Date	Name			

Customer-No.

ASSMANN WSW-No.
V1100 SMD/A x

Drawing-No.

ASS 0518 HS

rev06

Replace

Sheet