
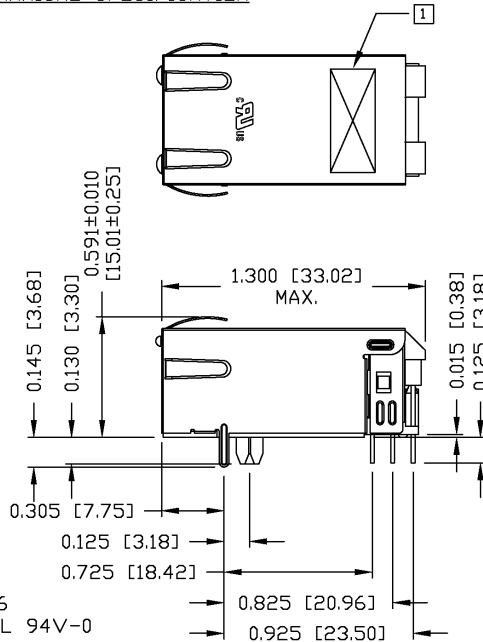



THE INFORMATION CONTAINED HEREIN IS CONSIDERED
"PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE
COPIED, REPRODUCED OR DISCLOSED WITHOUT THE
WRITTEN APPROVAL OF BEL FUSE INC.

MECHANICAL SPECIFICATION

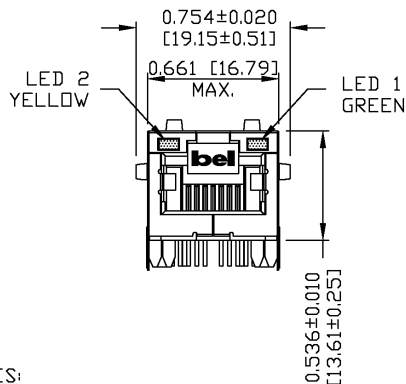

RECOMMENDED PCB FOOTPRINT

COMPONENT SIDE VIEW

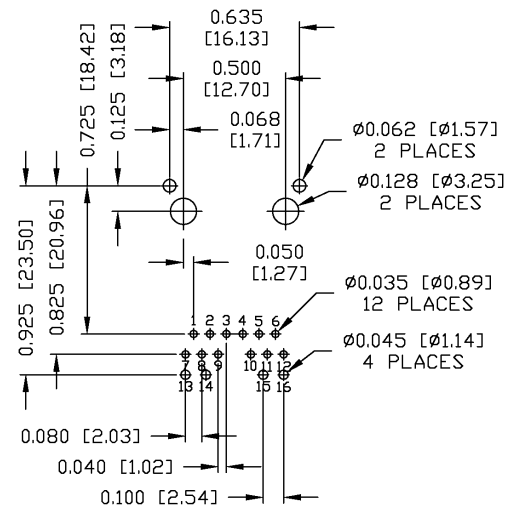

NOTES:

PLASTIC HOUSING: THERMOPLASTIC PA 4/6
FLAMMABILITY RATING UL 94V-0
CONTACTS: 50 MICRO-INCH HARD GOLD PLATING
OUTPUT PINS: TIN-COATED COPPER WIRE, DIA 0.018 INCH.
SOLDERABILITY: PER MIL STD. 202, METHOD 208.
METAL SHIELD: TIN/LEAD PLATED ON COPPER ALLOY.


[1] MARK PART WITH MFG LOGO, MFG NAME, PART NUMBER, AND DATE CODE.



UL RECOGNIZED - FILE #E196366 AND E169987.

DRWN	DATE	TITLE	PART NO. / DRAWING NO.	STANDARD DIM.		[] METRIC DIM. AS REFERENCE	
				TOL. IN INCH		UNIT : INCH [mm]	REV. : E
YAMI	03-10-04	gigabit MagJack™ (12 cores, Tab Up)	0826-1D1T-23	.X		SCALE : N/A	SIZE : A4
CHKD	DATE		FILE NAME	.XX			PAGE : 3
BILL/KEUNG	03-10-04		08261D1T23E.DWG	.XXX	±0.010		

SUGGESTED PANEL OPENING

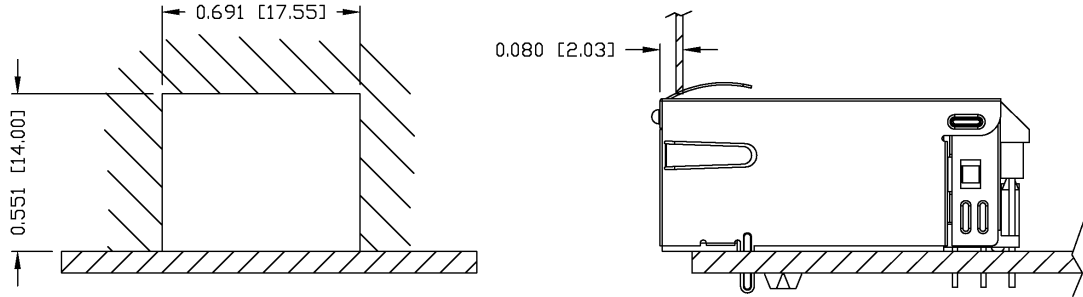

NOTE:

THE DISTANCE OF PANEL INSIDE SURFACE RELATIVE TO FRONT SURFACE OF PART IS ONLY A SUGGESTION.
IN CASE THIS DISTANCE IS DIFFERENT, THE REQUIRED PANEL OPENING DIMENSIONS CHANGE ACCORDINGLY.

PACKING INFORMATION

PACKING TRAY : 0200-9999-F6 (TOP)
0200-9999-F7 (BOTTOM)

PACKING QUANTITY : 40 PCS FINISHED GOODS PER TRAY
10 TRAYS (400 PCS FINISHED GOODS) PER CARTON BOX

NOTE : CARDBOARDS ARE PLACED BETWEEN LAYERS OF PACKING TRAY INSIDE CARTON BOX
(INCLUDE THE UPPERMOST AND LOWERMOST TRAY)

DRWN		TITLE	PART NO. / DRAWING NO.	STANDARD DIM.		[] METRIC DIM. AS REFERENCE		
YAMI	DATE			TOL. IN INCH		UNIT : INCH [mm]	REV. : E	
CHKD	DATE	gigabit MagJack ™ (12 cores, Tab Up)	0826-1D1T-23	.X		SCALE : N/A	SIZE : A4	
BILL/KEUNG	DATE			.XX				
	03-10-04			.XXX	±0.005		PAGE : 4	