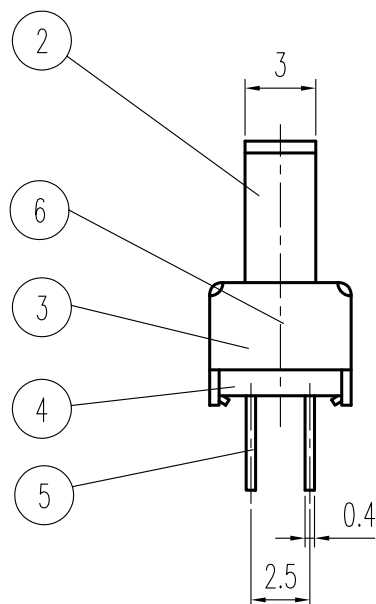



示意图 SCHEMATIC

安装孔 PIERCING PLAN

规格 Specifications

额定负荷 Ratings	DC <u>30</u> V <u>0.3</u> A
初期接触电阻 Initial Contact Resistance	<u>30</u> mΩ Max.
绝缘电阻 Insulation Resistance	DC500 V <u>60</u> Sec <u>100</u> MΩ Min.
抗电强度 Dielectric Voltage	AC <u>500</u> V(50~60HZ) <u>60</u> Sec.

操作力 Operating Force (gf)	$\begin{array}{ccc} A \longrightarrow B & B \longrightarrow C & C \longrightarrow D \\ D \longrightarrow C & C \longrightarrow B & B \longrightarrow A \\ 200 \pm 100 & 200 \pm 100 & 200 \pm 100 \end{array}$
機械寿命 Operating Life Without Load	10,000 次 Cycles

标号 REV	内容 DESCRIPTION	签名 SIGN.	日期 DATE
DWG NO. <u>ITEM2723</u>			

TOLERANCES UNLESS OTHERWISE SPEC.		TITLE	SLIDE SWITCH		ITEM NO	SS-24E06-TG 5 (P)		
UNDER 1	± 0.10	DRAWN	刘红梅	06-07-20	VERSION	A01	PAGE 1	OF 1
1 - 10	± 0.30	REVIEWED	张念明	06-07-20	SCALE		UNIT	mm
OVER 10	± 0.50	APPROVED	林高全	06-07-21	PROJECTION			

COMAX ELECTRONICS (HUIZHOU) CO.,LTD.