

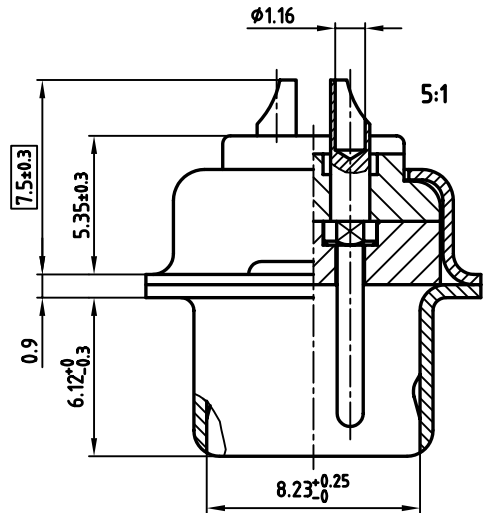


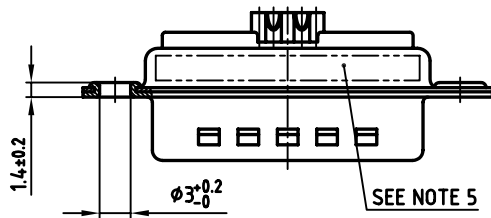

NOTES:

- METALSHELLS: STEEL; min. 320 μ " TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- SIGNAL CONTACTS: COPPER ALLOY
SOLDER CUP ACCEPTS CABLE AWG 20
- PLATING: min. 30 μ " HARD GOLD OVER min. 50 μ " NICKEL
- CONNECTOR IS PART MARKED: 3007W2PCM99A10X CONEC Y/WW
- = CRITICAL DIMENSION

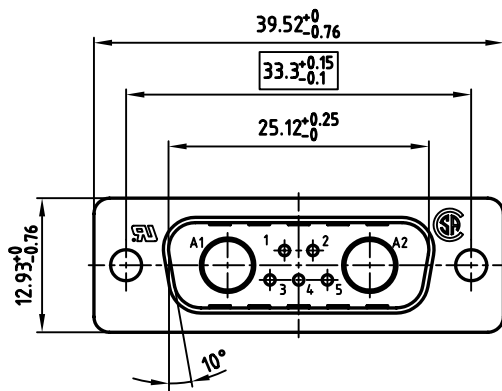

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	scale:
2002	2:1 (5:1)
drawn	material:
08.05.	SEE NOTES
name	
Parei	
appd.	
08.05.	
E. Mickenbecker	
norm	
d-old	

title:	dwg no:	DIN-A
D-SUB COMBINATION MALE	AutoCAD 2000	3
7W2P SOLDER CUP	13K1A562	sh: 1/1
part no: 3007W2PCM99A10X		