


15493.2
ZPRC 220...240V AC/DC
ZPRC 220...240V AC/DC

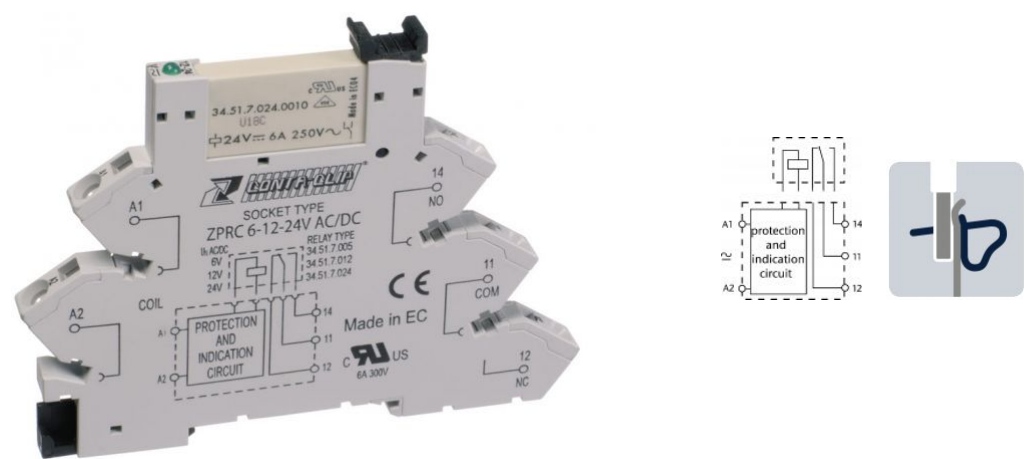

Plug-Relay-Compact (PRC) socket base PRC with tension-spring connection, Mounting type: Mounting rail TS 35, 1 CO contact, Input voltage: 220 to 240 VAC/DC

Business data

Product description	Relay socket base with tension-spring connection
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	31.2
Weight per piece (including packaging)	32.98
Unit of weight	G
Customs number	85369010
Country of origin	EEC

15493.2

ZPRC 220...240V AC/DC

ZPRC 220...240V AC/DC

Technical Data

Dimensions

Length	93 mm
Width	6.2 mm
Height TS 35 / 7.5 with BA	79.9 mm

Ratings

Rated voltage Un	220-240 VAC/DC
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Tension-spring connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	2.5 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Stripping length	10 mm

15493.2

ZPRC 220...240V AC/DC

ZPRC 220...240V AC/DC

Technical Data

Output data

Switching voltage / switching voltage max.	250 / 400 VAC
--	---------------

Contact configuration	1 CO contact
-----------------------	--------------

Materials

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	70 °C
---------------------------	-------

Further technical data

Protection	IP20
------------	------

Status display	✓
----------------	---

15493.2
ZPRC 220...240V AC/DC
ZPRC 220...240V AC/DC

Approvals

Standards and regulations

CE compliant	✓
--------------	---

15493.2

ZPRC 220...240V AC/DC

ZPRC 220...240V AC/DC

Media

