


16195.2
IRCP 110...125V AC/DC
IRCP 110...125V AC/DC

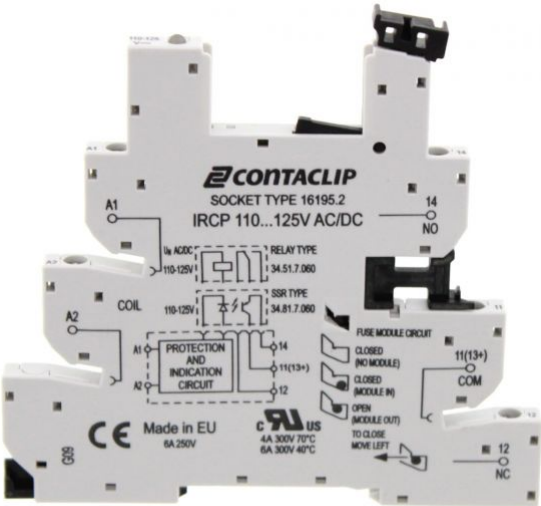

Interface-Relay-Compact (IRC) socket base IRCP with screw connection, Mounting type: Mounting rail TS 35, 1 CO contact, Input voltage: 110 to 125 VAC/DC

Business data

Product description	Relay socket base with screw connection
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	35.4
Weight per piece (including packaging)	35.4
Unit of weight	G
Customs number	85369010
Country of origin	EEC

16195.2

IRCP 110...125V AC/DC

IRCP 110...125V AC/DC

Technical Data

Dimensions

Length	94.3 mm
Width	6.2 mm
Height TS 35 / 7.5 with BA	90.7 mm

Ratings

Rated voltage Un	110-125 VAC/DC
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm ²
Wire cross-section single-core (rigid), max.	2.5 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Stripping length	10 mm
Torque	0.5 Nm

16195.2

IRCP 110...125V AC/DC

IRCP 110...125V AC/DC

Technical Data

Output data

Switching voltage / switching voltage max.	250 / 400 VAC
Contact configuration	1 CO contact

Materials

Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	70 °C

Further technical data

Protection	IP20
Status display	✓
Can hold a fuse in the P-contact	✓

16195.2
IRCP 110...125V AC/DC
IRCP 110...125V AC/DC

Approvals

Standards and regulations

CE compliant	✓
--------------	---

16195.2

IRCP 110...125V AC/DC

IRCP 110...125V AC/DC

Media

