


3450.9

FQI 1,5/10 RD

FQI 1,5/10 RD

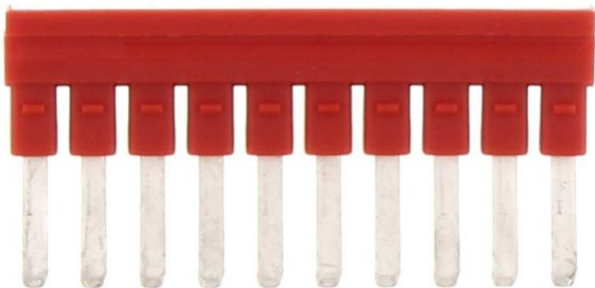

Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 40.9 mm, Colour: Red

Business data

Product description	Insulated cross-connector
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	5.2
Weight per piece (including packaging)	5.3
Unit of weight	G
Customs number	85389099
Country of origin	DE

3450.9

FQI 1,5/10 RD

FQI 1,5/10 RD

Technical Data

Dimensions

Length	4 mm
Width	40.9 mm
Pitch size	4.1 mm

Connection data

No. of poles	10
--------------	----

Materials

Material	Copper
Surface	Tin-nickel
Insulation housing	Polyamide 6.6
Flammability class UL 94	V-2
Working temperature, min.	-40 °C
Working temperature, max.	105 °C

3450.9

FQI 1,5/10 RD

FQI 1,5/10 RD

Technical Data

Further technical data

Mounting type	Plug in
Insulation available	✓
Touch protection is available	✓
Number of bridged terminals	10