



Two-hand pneumatic safety start module EN 574 classification III A Part number 81580504




- Conforms to the Machinery Directive and standard EN 574
- Including pneumatic relay to classification IIIA or IIIB depending on version

	Type	Symbol
81580504	EN 574 classification III A	
81580503	EN 574 classification III B	

Operating pressure (bar)

Orifice diameter mm	2.5
Max. delay between input signals s	0.2 max.
Connection	Semi-rigid tubing Ø 4 (NFE 49100)
Operating temperature (°C)	-5 → +50
Mechanical life (operations)	1,5.10 ⁶
Weight (g)	1000

Dimension Diagram : 81 580 503 - 81 580 504

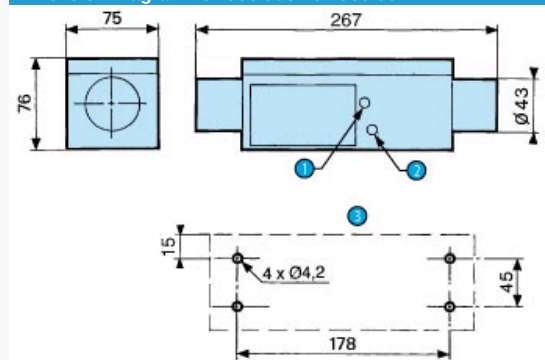

N°	Legend
1	Supply via 4 mm push-in fitting
2	Output via 4 mm push-in fitting
3	Fixing viewed from below

: 81 580 504 (Typical application with double-acting cylinder)

