



## SERIES: V78E-500-SMT | DESCRIPTION: NON-ISOLATED DC SWITCHING REGULATOR

### FEATURES

- 500 mA of output current
- efficiency up to 95%
- SMT package
- industrial operating temp -40~+85°C
- designed to meet IEC/EN 62368-1
- industry standard footprint
- no load input current of 0.2 mA
- output short circuit protection on output




### MODEL

|                | input voltage <sup>1</sup> |                | output voltage<br>(Vdc) | output current<br>max<br>(mA) | output power<br>max<br>(W) | ripple & noise <sup>2</sup><br>max<br>(mVp-p) | efficiency <sup>3</sup><br>typ<br>(%) |
|----------------|----------------------------|----------------|-------------------------|-------------------------------|----------------------------|-----------------------------------------------|---------------------------------------|
|                | typ<br>(Vdc)               | range<br>(Vdc) |                         |                               |                            |                                               |                                       |
| V78E01-500-SMT | 12                         | 4.75~28        | 1.5                     | 500                           | 0.75                       | 50                                            | 76                                    |
| V78E02-500-SMT | 12                         | 4.75~32        | 2.5                     | 500                           | 1.25                       | 50                                            | 81                                    |
| V78E03-500-SMT | 24                         | 4.75~36        | 3.3                     | 500                           | 1.65                       | 50                                            | 86                                    |
| V78E05-500-SMT | 24                         | 6.5~36         | 5                       | 500                           | 2.5                        | 50                                            | 90                                    |
| V78E06-500-SMT | 24                         | 8~36           | 6.5                     | 500                           | 3.25                       | 50                                            | 92                                    |
| V78E09-500-SMT | 24                         | 12~36          | 9                       | 500                           | 4.5                        | 50                                            | 93                                    |
| V78E12-500-SMT | 24                         | 15~36          | 12                      | 500                           | 6                          | 50                                            | 94                                    |
| V78E15-500-SMT | 24                         | 19~36          | 15                      | 500                           | 7.5                        | 50                                            | 95                                    |

- Notes:
1. For input voltages higher than 30 Vdc, a 22  $\mu$ F / 50 V input capacitor is required.
  2. Tested at nominal input, 20 MHz bandwidth, with 10  $\mu$ F electrolytic and 1  $\mu$ F ceramic capacitor on the output. For 1.5~3.3 Vdc output models, tested at 20~100% load. For all other models, tested at 10~100% load. At loads below 20% for 1.5~3.3 Vdc output models, the max ripple and noise will be 100 mVp-p. At loads below 10% for all other models, the max ripple and noise will be 150 mVp-p.
  3. Measured at min  $V_{in}$ , full load.
  4. All specifications are measured at  $T_a=25^{\circ}\text{C}$ , humidity < 75%, nominal input voltage, and rated output load unless otherwise specified.

### PART NUMBER KEY

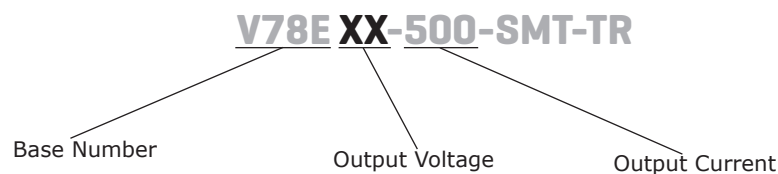

## INPUT

| parameter                            | conditions/description                                 | min  | typ  | max | units |
|--------------------------------------|--------------------------------------------------------|------|------|-----|-------|
| operating input voltage <sup>5</sup> |                                                        | 4.75 |      | 36  | Vdc   |
| filter                               | capacitor filter                                       |      |      |     |       |
| input reverse polartiy protection    | no                                                     |      |      |     |       |
| no-load input current                |                                                        |      | 0.2  | 1.5 | mA    |
| remote on/off <sup>6</sup>           | turn on (3.2~8 Vdc or open circuit)                    |      |      |     |       |
|                                      | turn off (<0.8 Vdc)<br>input current when switched off |      | 0.03 | 0.1 | mA    |

Note: 5. See Model section on page 1 for specific input voltage ranges.

6. The voltage of remote ON/OFF pin is relative to GND pin.

## OUTPUT

| parameter                            | conditions/description                         | min | typ  | max   | units |
|--------------------------------------|------------------------------------------------|-----|------|-------|-------|
| maximum capacitive load <sup>7</sup> |                                                |     |      | 680   | μF    |
| voltage accuracy                     | at full load, input voltage range              |     | ±2   | ±4    | %     |
|                                      | 1.5, 2.5, 3.3 Vdc output models                |     | ±2   | ±3    | %     |
|                                      | all other models                               |     |      |       |       |
| line regulation                      | at full load, input voltage range              |     | ±0.2 | ±0.4  | %     |
| load regulation                      | at 10~100 % load, input voltage range          |     |      | ±1    | %     |
|                                      | 1.5, 2.5 Vdc output models                     |     |      | ±0.6  | %     |
|                                      | all other models                               |     |      |       |       |
| voltage adjustment                   | input voltage range                            |     | ±10  |       | %Vo   |
| switching frequency                  | at full load, input voltage range              |     |      |       |       |
|                                      | 1.5 Vdc output model                           |     | 370  |       | kHz   |
|                                      | all other models                               |     | 700  |       | kHz   |
| transient recovery time              | at nominal input voltage, 25% load step change |     | 0.2  | 1     | ms    |
| transient response deviation         | at nominal input voltage, 25% load step change |     | 50   | 200   | mV    |
| temperature coefficient              | operating temperature -40 °C to +85 °C         |     |      | ±0.03 | %/°C  |

Note: 7. The maximum capacitive load was tested at nominal input voltage, full load.

## PROTECTIONS

| parameter                | conditions/description    | min | typ | max | units |
|--------------------------|---------------------------|-----|-----|-----|-------|
| short circuit protection | continuous, auto recovery |     |     |     |       |

## SAFETY AND COMPLIANCE


| parameter           | conditions/description                                                                | min       | typ | max | units |
|---------------------|---------------------------------------------------------------------------------------|-----------|-----|-----|-------|
| safety approvals    | CE                                                                                    |           |     |     |       |
| conducted emissions | CISPR32/EN55032, class B (external circuit required, see Figure 3-b)                  |           |     |     |       |
| radiated emissions  | CISPR32/EN55032, class B (external circuit required, see Figure 3-b)                  |           |     |     |       |
| ESD                 | IEC/EN61000-4-2, contact ± 4kV, class B                                               |           |     |     |       |
| radiated immunity   | IEC/EN61000-4-3, 10V/m, class A                                                       |           |     |     |       |
| EFT/burst           | IEC/EN61000-4-4, ± 1kV, class B (external circuit required, see Figure 3-a)           |           |     |     |       |
| surge               | IEC/EN61000-4-5, line-line ± 1kV, class B (external circuit required, see Figure 3-a) |           |     |     |       |
| conducted immunity  | IEC/EN61000-4-6, 3 Vr.m.s, class A                                                    |           |     |     |       |
| MTBF                | as per MIL-HDBK-217F, 25°C                                                            | 2,000,000 |     |     | hours |
| RoHS                | yes                                                                                   |           |     |     |       |

## ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curve     | -40 |     | 85  | °C    |
| storage temperature   |                        | -55 |     | 125 | °C    |
| storage humidity      | non-condensing         |     |     | 95  | %     |

## SOLDERABILITY

| parameter        | conditions/description                              | min | typ | max | units |
|------------------|-----------------------------------------------------|-----|-----|-----|-------|
| reflow soldering | see reflow profile, refer to IPC/JEDEC J-STD-020D.1 |     |     | 245 | °C    |

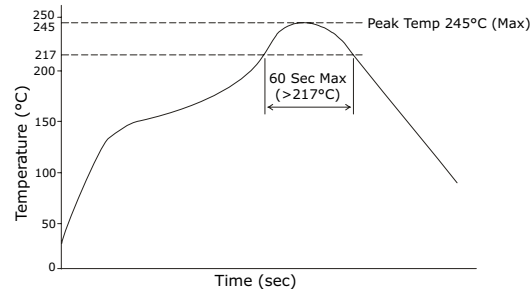


## MECHANICAL

| parameter     | conditions/description                                     | min | typ | max | units |
|---------------|------------------------------------------------------------|-----|-----|-----|-------|
| dimensions    | 15.24 x 8.50 x 8.25 [0.60 x 0.335 x 0.325 inch]            |     |     |     | mm    |
| case material | black flame-retardant and heat resistant plastic (UL94V-0) |     |     |     |       |
| weight        |                                                            |     | 1.5 |     | g     |


## MECHANICAL DRAWING

units: mm [inch]  
tolerance:  $\pm 0.50$  [ $\pm 0.020$ ]  
pin section tolerance:  $\pm 0.10$  [ $\pm 0.004$ ]

| PIN CONNECTIONS |               |
|-----------------|---------------|
| PIN             | FUNCTION      |
| 1               | +VIN          |
| 2               | +VIN          |
| 3               | GND           |
| 4               | +VOUT         |
| 5               | +VOUT         |
| 6               | V adj         |
| 7               | GND           |
| 10              | remote on/off |

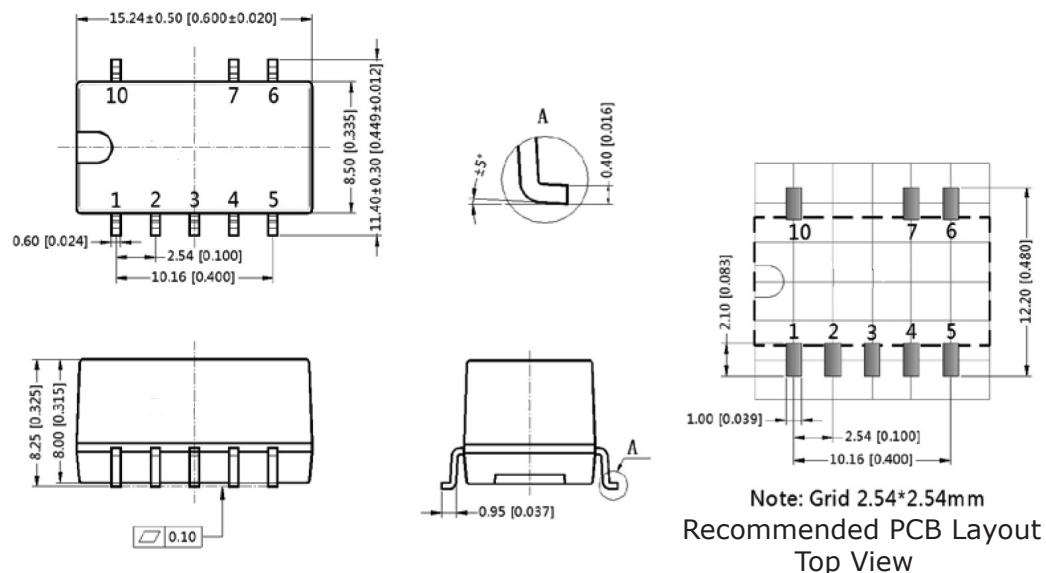


## DERATING CURVE

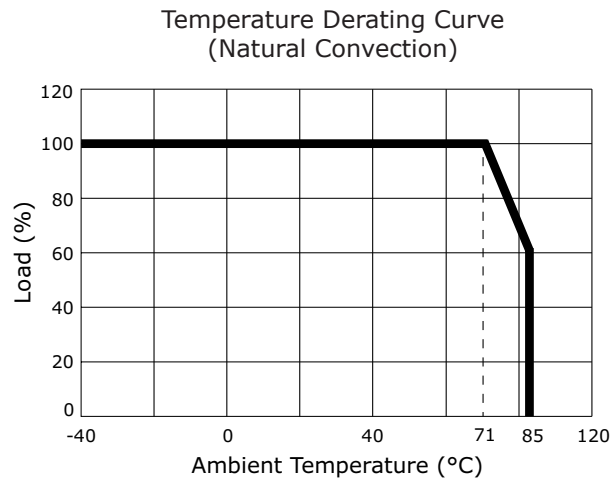


## EFFICIENCY CURVES


V78E01-500-SMT Efficiency Curve  
Efficiency vs. Input Voltage  
(at full load)

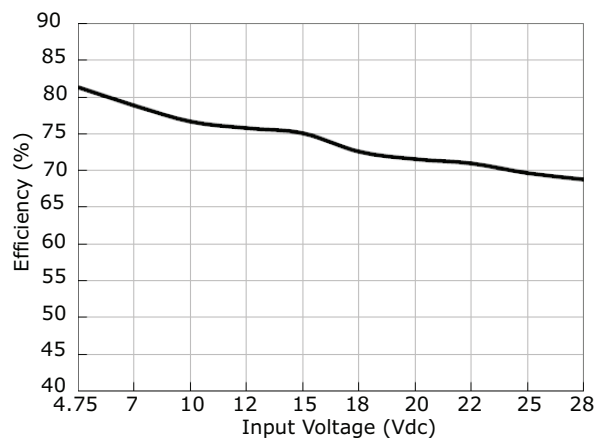


V78E01-500-SMT Efficiency Curve  
Efficiency vs. Load Current  
(at Vin nominal)

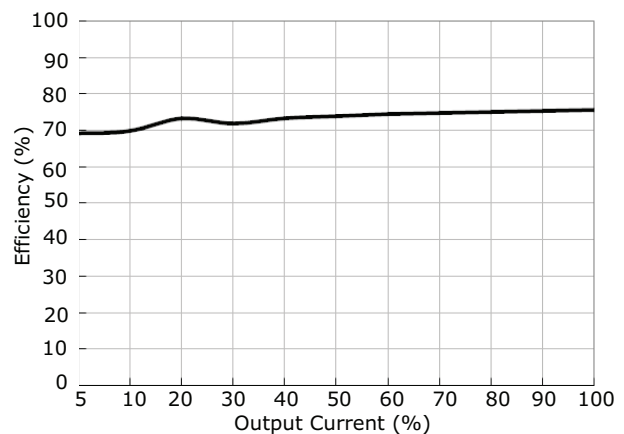

V78E02-500-SMT Efficiency Curve  
Efficiency vs. Input Voltage  
(at full load)

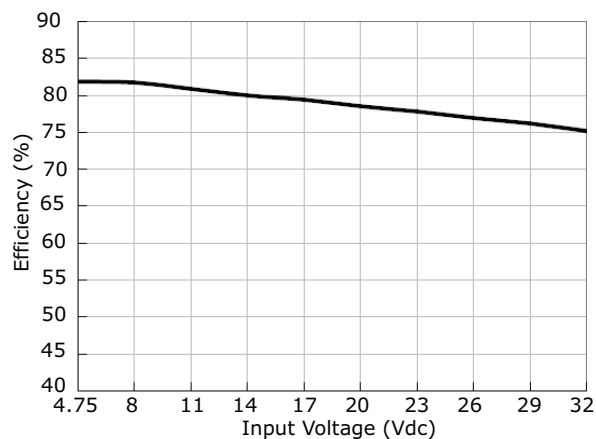


V78E02-500-SMT Efficiency Curve  
Efficiency vs. Load Current  
(at Vin nominal)

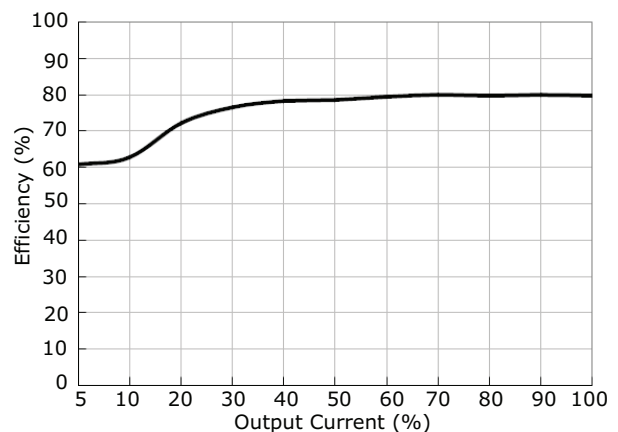


## EFFICIENCY CURVES (CONTINUED)


V78E03-500-SMT Efficiency Curve  
Efficiency vs. Input Voltage  
(at full load)

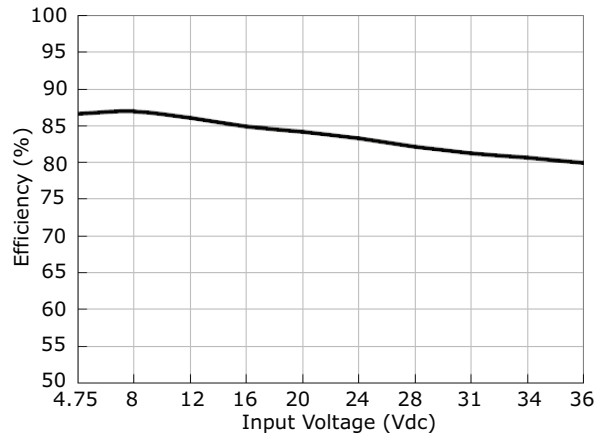


V78E03-500-SMT Efficiency Curve  
Efficiency vs. Load Current  
(at Vin nominal)

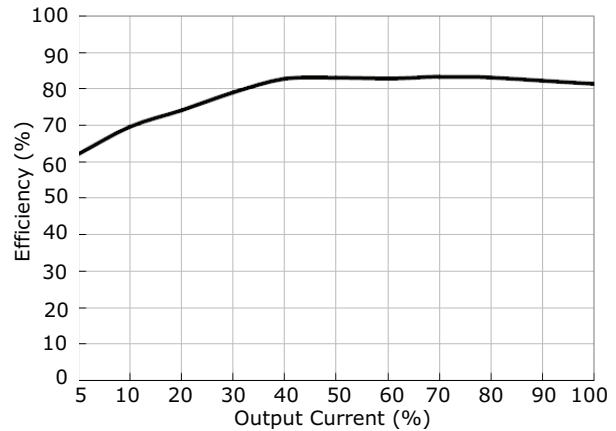


V78E05-500-SMT Efficiency Curve  
Efficiency vs. Input Voltage  
(at full load)

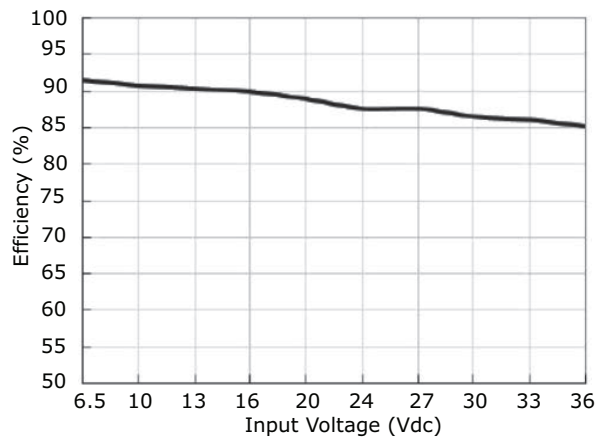


V78E05-500-SMT Efficiency Curve  
Efficiency vs. Load Current  
(at Vin nominal)

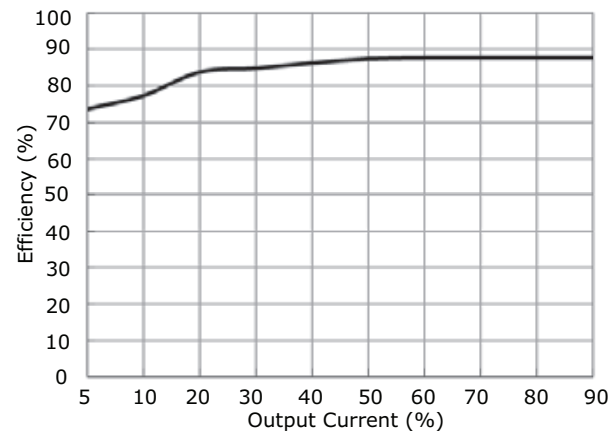

V78E06-500-SMT Efficiency Curve  
Efficiency vs. Input Voltage  
(at full load)

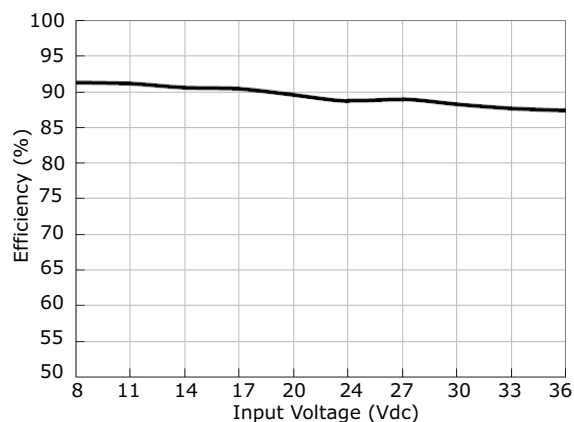


V78E06-500-SMT Efficiency Curve  
Efficiency vs. Load Current  
(at Vin nominal)

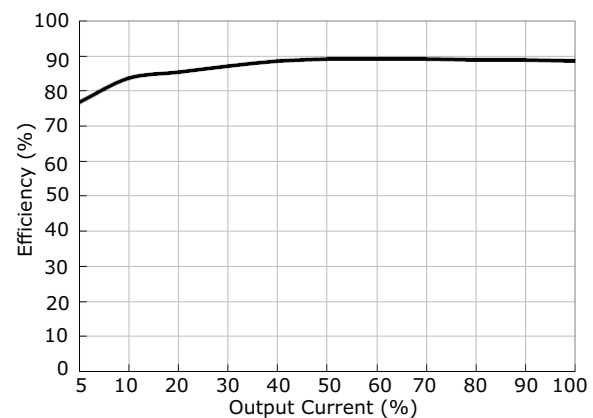


## EFFICIENCY CURVES (CONTINUED)


V78E09-500-SMT Efficiency Curve  
Efficiency vs. Input Voltage  
(at full load)

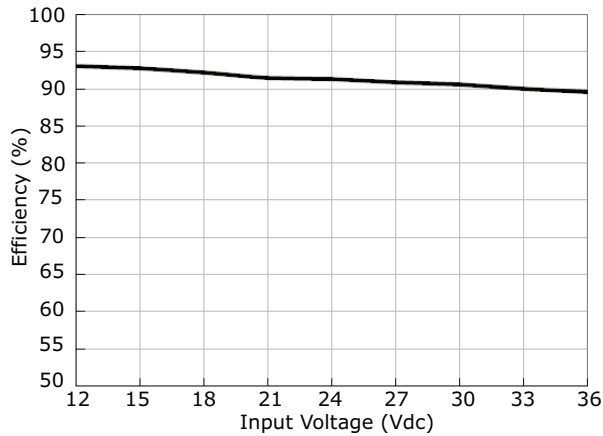


V78E09-500-SMT Efficiency Curve  
Efficiency vs. Load Current  
(at Vin nominal)

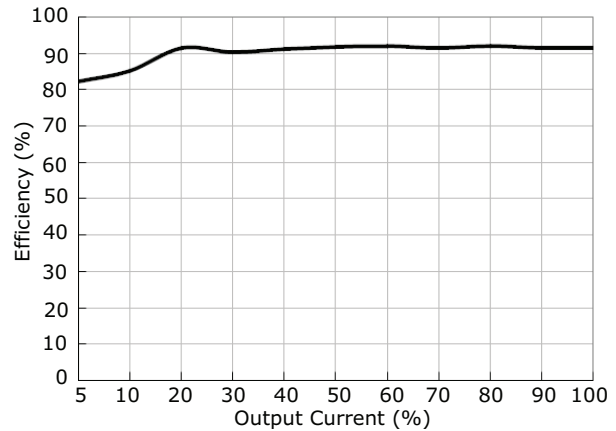


V78E12-500-SMT Efficiency Curve  
Efficiency vs. Input Voltage  
(at full load)

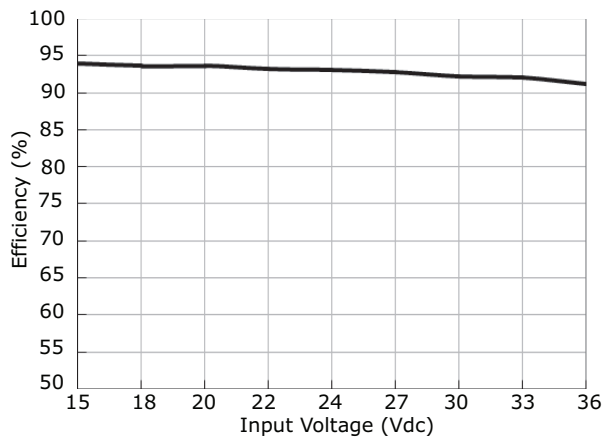


V78E12-500-SMT Efficiency Curve  
Efficiency vs. Load Current  
(at Vin nominal)

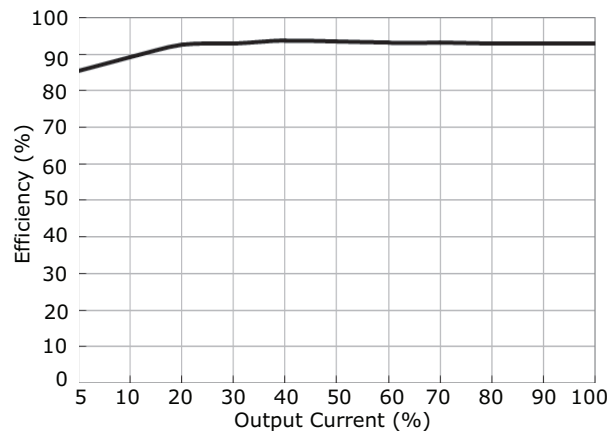

V78E15-500-SMT Efficiency Curve  
Efficiency vs. Input Voltage  
(at full load)

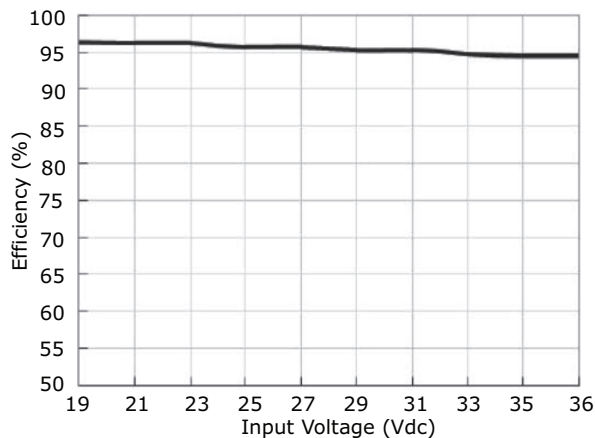


V78E15-500-SMT Efficiency Curve  
Efficiency vs. Load Current  
(at Vin nominal)

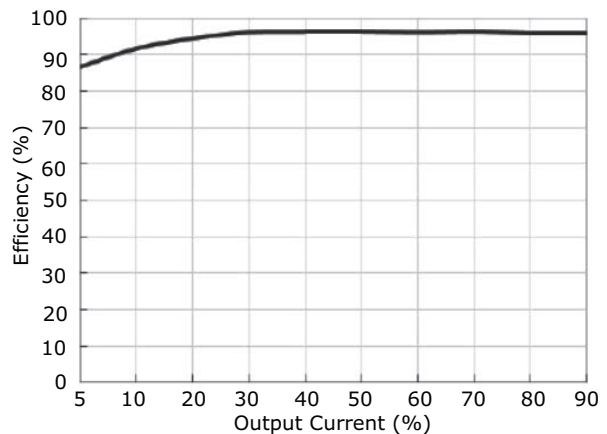

## TYPICAL APPLICATION CIRCUIT


**Figure 1**

Application Circuit

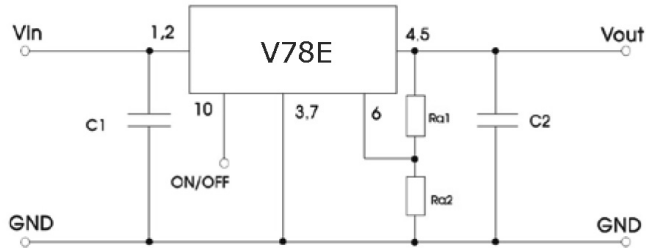

**Figure 2**

LC Filter Application Circuit

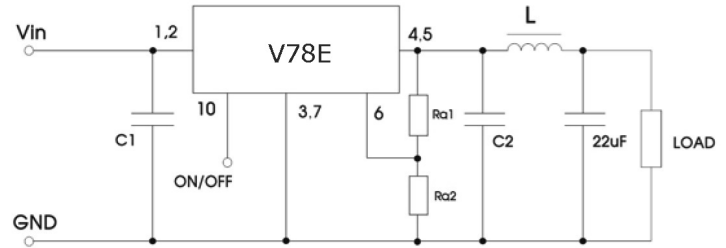


**Table 1**

| Model Number   | C1<br>(ceramic capacitor) | C2<br>(ceramic capacitor) | Ra1/Ra2<br>(Vadj resistance)               |
|----------------|---------------------------|---------------------------|--------------------------------------------|
| V78E01-500-SMT | 10 $\mu$ F/50 V           | 22 $\mu$ F/10 V           | refer to Vadj<br>resistance<br>calculation |
| V78E02-500-SMT | 10 $\mu$ F/50 V           | 22 $\mu$ F/10 V           |                                            |
| V78E03-500-SMT | 10 $\mu$ F/50 V           | 22 $\mu$ F/10 V           |                                            |
| V78E05-500-SMT | 10 $\mu$ F/50 V           | 22 $\mu$ F/16 V           |                                            |
| V78E06-500-SMT | 10 $\mu$ F/50 V           | 22 $\mu$ F/16 V           |                                            |
| V78E09-500-SMT | 10 $\mu$ F/50 V           | 22 $\mu$ F/25 V           |                                            |
| V78E12-500-SMT | 10 $\mu$ F/50 V           | 22 $\mu$ F/25 V           |                                            |
| V78E15-500-SMT | 10 $\mu$ F/50 V           | 22 $\mu$ F/25 V           |                                            |

## EMC RECOMMENDED CIRCUIT

**Figure 3**

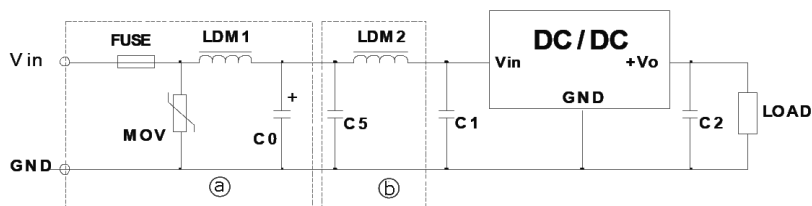

**Table 2**

| Recommended external circuit components |                                          |
|-----------------------------------------|------------------------------------------|
| FUSE                                    | choose according to actual input current |
| MOV                                     | S20K30                                   |
| LDM1                                    | 82 $\mu$ H                               |
| C0                                      | 680 $\mu$ F/50 V                         |
| C1, C2                                  | refer to table 1                         |
| C5                                      | 4.7 $\mu$ F/50 V                         |
| LDM2                                    | 12 $\mu$ H                               |

Note:

- C1 & C2 are required and should be connected as close to the module pins as possible.
- C1 & C2 can be increased as needed and the use of tantalum or low ESR electrolytic capacitors would be recommended.
- To reduce the output ripple further, it is recommended to add an "LC" filter at the output (see figure 2) with a 10~47  $\mu$ H L component.


## APPLICATION NOTES

### 1. Output voltage trimming

Leave open if not used.

**Figure 4**

Application Circuit for Trim pin  
(part in broken line is the interior of models)

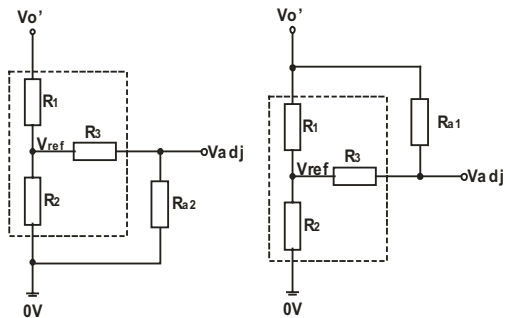

Formula for Trim Resistor

$$\text{up: } R_{a2} = \frac{a R_2}{R_2 - a} - R_3 \quad a = \frac{V_{ref}}{V_{o'} - V_{ref}} \cdot R_1$$

$$\text{down: } R_{a1} = \frac{a R_1}{R_1 - a} - R_3 \quad a = \frac{V_{o'} - V_{ref}}{V_{ref}} \cdot R_2$$

Note: Value for R1, R2, R3, and Vref refer to Table 3  
Ra1/Ra2: Trim Resistor  
a: User-defined parameter, no actual meanings  
Vo': The trim up/down voltage

**Table 3**

| Vout (Vdc)        | R1 (kΩ) | R2 (kΩ) | R3 (kΩ) | Vref (V) |
|-------------------|---------|---------|---------|----------|
| 1.5 <sup>11</sup> | 7.5     | 7.5     | 15      | 0.75     |
| 2.5               | 27      | 11.858  | 51      | 0.765    |
| 3.3               | 33      | 9.9     | 47      | 0.765    |
| 5                 | 75      | 13.5    | 75      | 0.765    |
| 6.5               | 75      | 10      | 51      | 0.765    |
| 9                 | 51      | 4.7     | 27      | 0.765    |
| 12                | 75      | 5.1     | 27      | 0.765    |
| 15                | 82      | 4.423   | 27      | 0.765    |

Note: 11. The 1.5 Vdc output model can only be adjusted up.



## PACKAGING


units: mm

Reel Size: Ø330 mm

Reel QTY: 300 pcs per tray

Carton Box Size: 400 x 365 x 255 mm

Carton Box QTY: 1,800 pcs per carton box

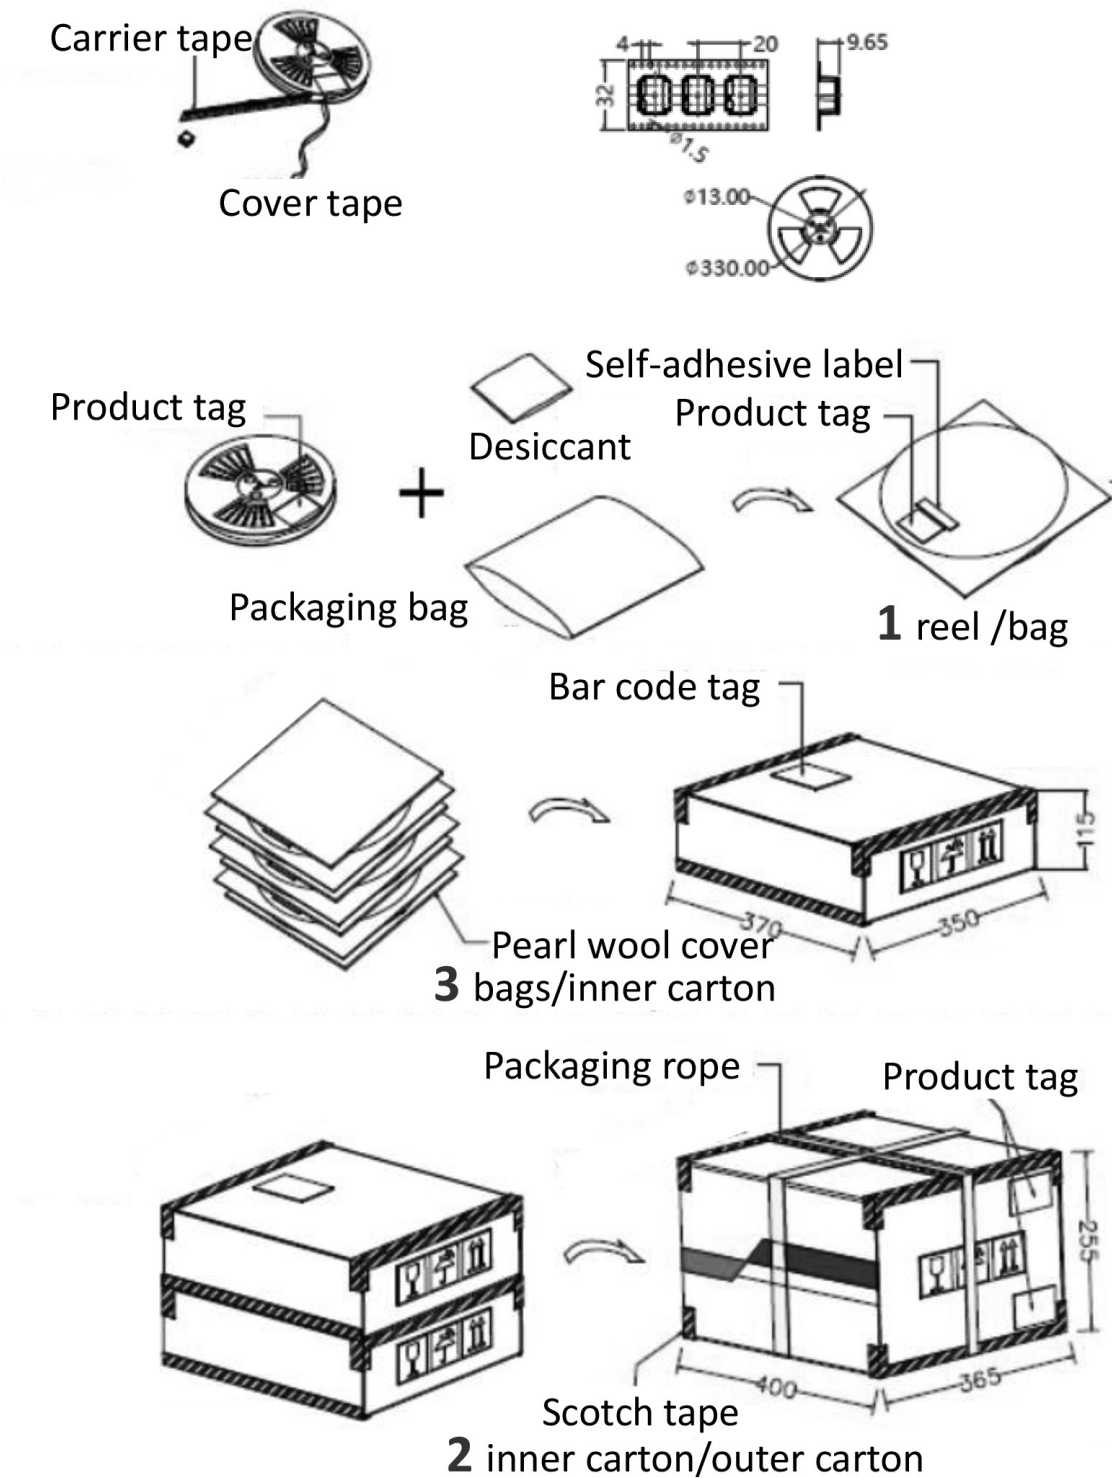

## REVISION HISTORY

| rev. | description     | date       |
|------|-----------------|------------|
| 1.0  | initial release | 09/12/2018 |

The revision history provided is for informational purposes only and is believed to be accurate.

**CUI INC<sup>®</sup>**

**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.