

XBee® Wi-Fi

Embedded Wi-Fi Module for OEMs

Embedded Wi-Fi modules provide ultra low-power 802.11b/g/n communications in the flexible XBee hardware and software footprint.




Overview

XBee Wi-Fi embedded RF modules provide simple serial to IEEE 802.11 connectivity. By bridging the low-power/low-cost requirements of wireless device networking with the proven infrastructure of 802.11, the XBee Wi-Fi creates new wireless opportunities for energy management, process and factory automation, wireless sensor networks, intelligent asset management and more. Focused on the rigorous requirements of these wireless device networks, the XBee Wi-Fi gives developers IP-to-the-device capability.

XBee modules offer developers tremendous flexibility. The XBee Wi-Fi shares a common footprint with other XBee modules. This allows different XBee technologies to be drop-in replacements for each other; developers can switch from 802.11 to 802.15.4, ZigBee, DigiMesh® and proprietary long-range with minimal development time or risk.

As a member of the XBee family, the XBee Wi-Fi combines hardware with software for a complete modular solution. XBee Wi-Fi modules are designed to communicate with access points in existing 802.11 infrastructures. Developers can use AT and API commands for advanced configuration options.

Related Products



Wi-Fi System-on-Modules




Wi-Fi Modules



iDigi® Solutions



Wireless Serial Servers




XBee Modules



Development Kits

Application Highlight

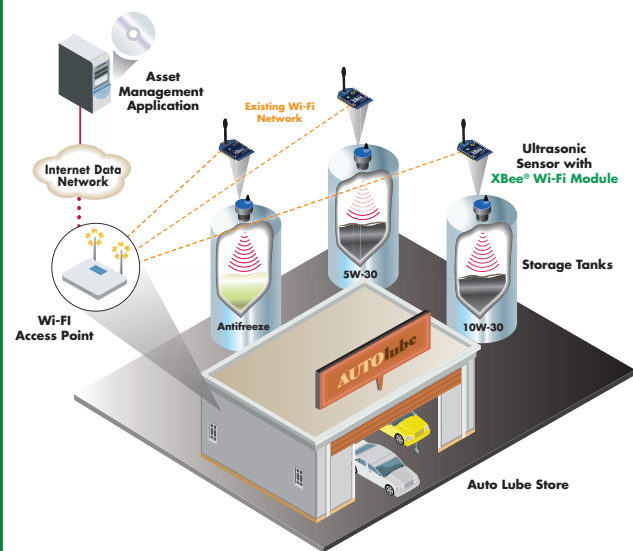

Features/Benefits

- Common XBee footprint allows OEMs to support a variety of wireless protocols
- Flexible SPI and UART serial interfaces
- RPSMA, PCB, U.FL and wire whip antenna options
- Support for low-power sleeping applications with <2 μ A power-down current
- Over-the-air data rates up to 65 Mbps
- Wide temperature range (-40° C to +85° C) ensures operation in industrial environments
- Easily joins existing 802.11b/g/n infrastructures
- Advanced configuration options available via simple AT or API commands



Platform		XBee® Wi-Fi	
Features			
Serial Data Interface		UART up to 1 Mbps, SPI up to 3.5 Mbps	
Configuration Method		API or AT commands	
Frequency Band		ISM 2.4 GHz	
ADC Inputs		4 (12-bit)	
Digital I/O		10	
Antenna Options		PCB (embedded), U.FL, RPSMA, Wire Whip	
Operating Temperature		-40° C to +85° C	
Dimensions (L x W)		0.960 in x 1.297 in (2.438 cm x 3.294 cm)	
Networking and Security			
Security		WPA-PSK and WPA2-PSK	
Channels		14 channels	
Wireless LAN			
Standard		802.11b/g/n	
Data Rates		802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6.5, 13, 19.5, 26, 39, 52, 58.5, 65 Mbps	
Modulation		802.11b: CCK, DSSS 802.11g/n: OFDM with BPSK, QPSK, 16-QAM, 64-QAM	
Transmit Power		802.11b: 16 dBm 802.11g: 16 dBm @ 6, 9, 12, 18 Mbps; 15 dBm @ 24, 36 Mbps; 14 dBm @ 48, 54 Mbps 802.11n: 16 dBm @ 6.5, 13, 19.5, 26 Mbps; 15 dBm @ 39, 52 Mbps; 14 dBm @ 58.5, 65 Mbps	
Receiver Sensitivity		802.11b (<8% PER): -97 dBm @ 1 Mbps; -93 dBm @ 2 Mbps; -89 dBm @ 11 Mbps 802.11g (<10% PER): -91 dBm @ 6 Mbps; -75 dBm @ 54 Mbps 802.11n (<10% PER): -72 dBm @ 65 Mbps	
Power Requirements			
Supply Voltage		3.1 to 3.6 V	
Transmit Current		Up to 260 mA	
Receive Current		140 mA	
Power-Down Current		<2 µA @ 25° C	
Regulatory Approvals			
FCC (USA)		Yes	
IC (Canada)		Yes	
CE/ETSI (Europe)		Pending	
C-TICK (Australia)		Pending	
Telec (Japan)		Pending	

Visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

91001698
A4/712

**Digi International
Worldwide HQ**

877-912-3444
952-912-3444

**Digi International
France**

+33-1-55-61-98-98
www.digi.fr

**Digi International
Japan**

+81-3-5428-0261
www.digi-intl.co.jp

**Digi International
India**

+91-80-4287-9887

**Digi International
Singapore**

+65-6423-0015

**Digi International
China**

+86-21-5150-6898
www.digi.cn

BUY ONLINE • www.digi.com

© 2011-2012 Digi International Inc.
All rights reserved. Digi, Digi International, the Digi logo, the Making Wireless M2M Easy logo, DigiMesh and XBee are either trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective holders. All information provided is subject to change without notice.

info@digi.com

