
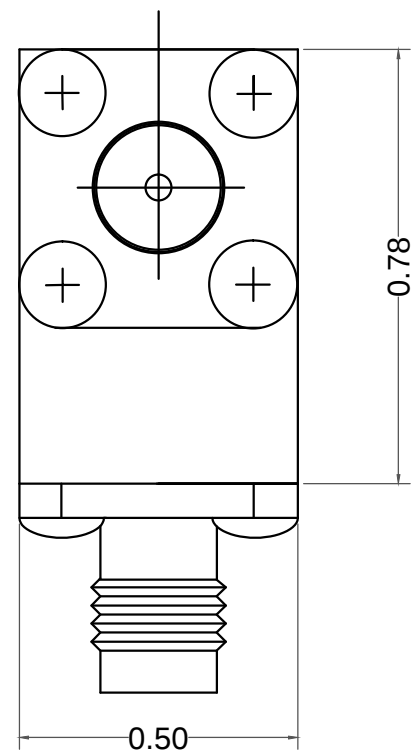


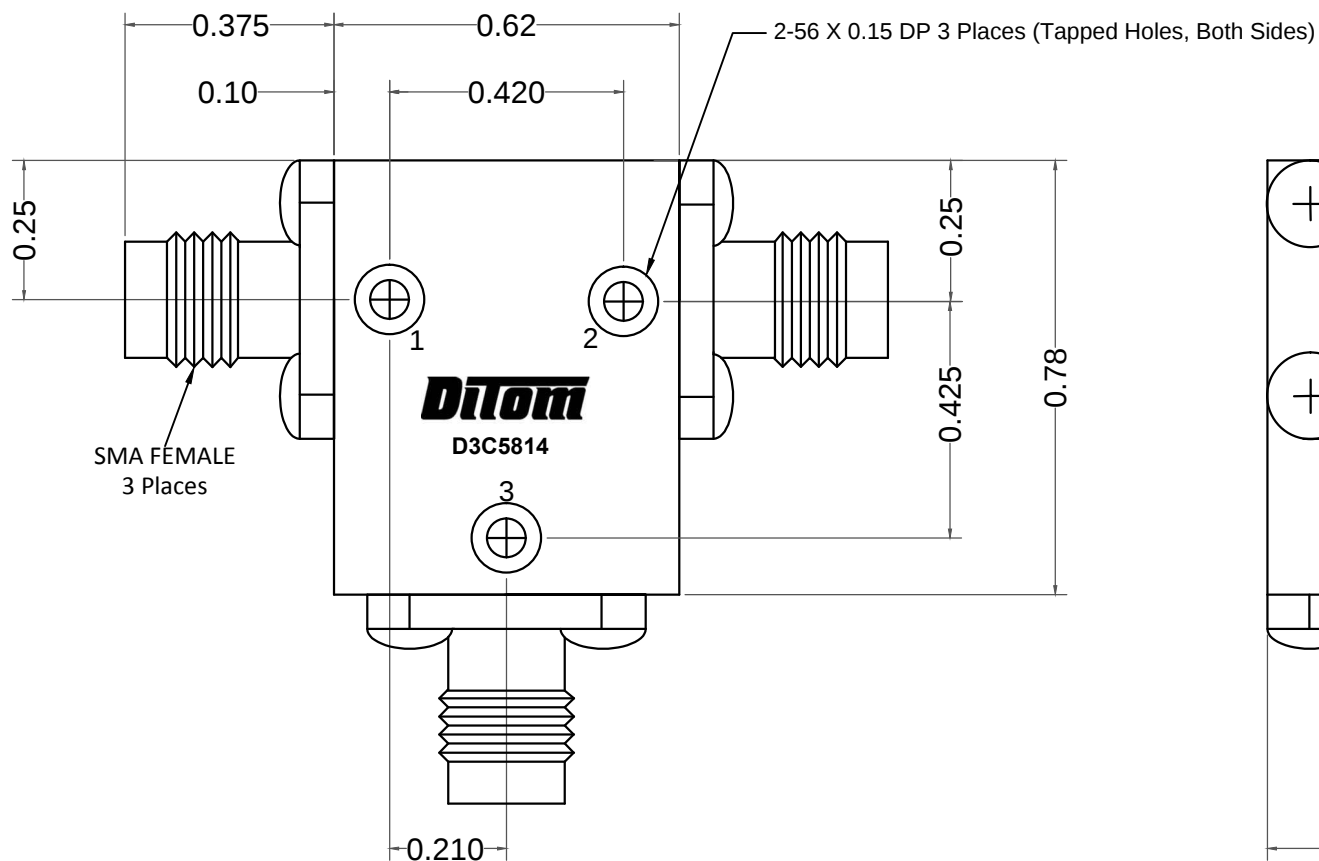

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	5.80 - 6.85 / 7.90 - 8.40 / 13.75 - 14.50
ISOLATION (dB):	15 MIN
INSERTION LOSS (dB):	0.80 MAX
VSWR:	1.30 MAX
POWER: AVG (ALL PORTS):	20W
PEAK:	30W

MECHANICAL SPECIFICATIONS

CONNECTORS:	SMA-FEMALE, PASSIVATED STAINLESS STEEL
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-30° to +65°C
WEIGHT (APPROX):	0.80 OUNCES

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED		 Fresno, California, USA	
TOLERANCE XX±0.03 XXX±0.010	TITLE 5.8 - 14.5 GHz SMA Circulator		
SCALE 6:1	MODEL NO D3C5814	REV	