


EAO – Your Expert Partner for Human Machine Interfaces

823-.401-00 - Keylock switch 2 postions actuator maintained square, Func. 1, 3

823-.401-00 - Keylock switch 2 postions actuator maintained square, Func. 1, 3

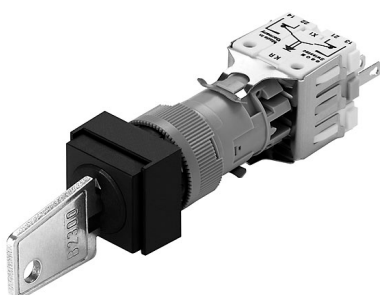

Attention: The preview is based on a sample product. This can differ from your current configuration.

Mounting

Mounting cut-out	Ø 16 mm
Design	raised

Front

Front dimension	18 mm x 18 mm
Front shape	square

Other Attributes

Weight	0,029 kg
--------	----------

Operating-/Indication part

Switching angle	90° right
-----------------	-----------

IP-Rating

Front protection	IP40
------------------	------

Connection Method

Terminal	Solder 2.8 x 0.5 mm
----------	---------------------

Actuator

Switching action	Rest(a) - Maintain
------------------	--------------------

Switching element

Rotary positions	2
Switching system	Snap-action switching element
Contacts	3 NC + 3 NO
Switching current	5 A
Contact material	
Switching voltage	250 V AC


Function

Keylock switch	
----------------	--


EAO – Your Expert Partner for Human Machine Interfaces

823-.401-00 - Keylock switch 2 postions actuator maintained square, Func. 1, 3


Dimensions




Mounting cut-outs



Wiring diagram

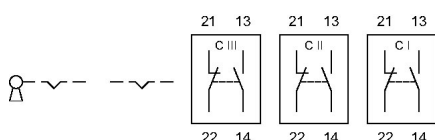

Switching positions



Additional information

Standard lock B2 300

Further lock numbers see «Technical data»

Use the location strip no. 260-0020-00 for anti-twisting of the front bezel. At momentary position the overturning force is max. 60 Ncm.

Functions see chapter «Application guidelines»

Legend

Contacts: NC = Normally closed, NO = Normally open

Switching action: A = Rest, C = Maintained