



THIS IS A C.A.D. GENERATED DRAWING DO NOT MAKE MANUAL REVISIONS TO MASTER.

10.9


6.0





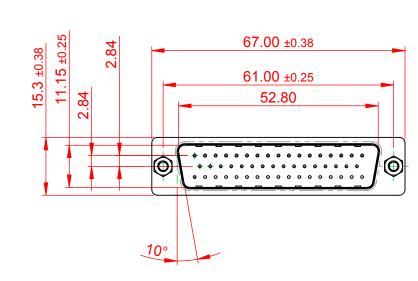

3.5



NOTES:


MATERIAL:

HOUSING: THERMOPLASTIC POLYESTER, UL94V-0 SHELL: STEEL, Sn or Ni PLATED CONTACT: COPPER ALLOY SEE ORDERING GUIDE FOR PLATING

OPERATING TEMPERATURE: -55°C ~ 85°C

CURRENT RATING: 3A PER CONTACT CONTACT RESISTANCE: 25mQ MAX. INSULATOR RESISTANCE: 5000MΩ min. DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC rms

	627 SERIES D-SUB CONNECTOR		SW REFERENCE NO.: 627 ASSEMBLY					
627 SERIES D-SUB (DRAWN: C.B		DATE: AUG. 01/201		18	
			CHECKED:		DATE:			
EDAC INC	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: 1:1		SHEET	1 (DF	1	
TORONTO, ONTARIO CANADA		DRAWING NUMBER: 627-050-220-047				ISSUE		
YOUR CONNECTION TO QUALITY & SERVICE		PART NUMBER: 62	27-050-2	20-047			1	



COMPLIANT

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2011/65/EU FOR RoHS COMPLIANCY.