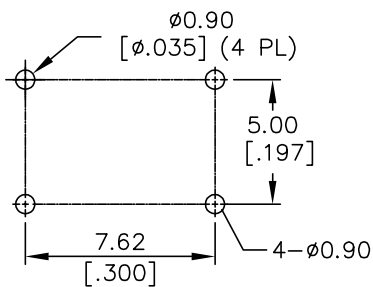



P.C.B LAND PATTERN

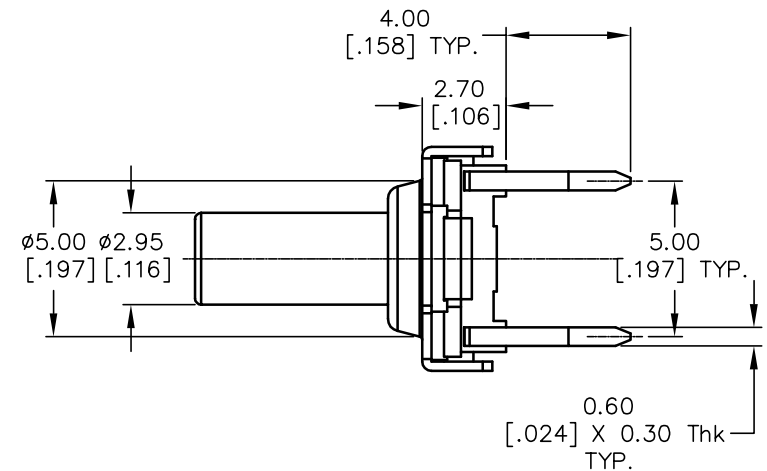

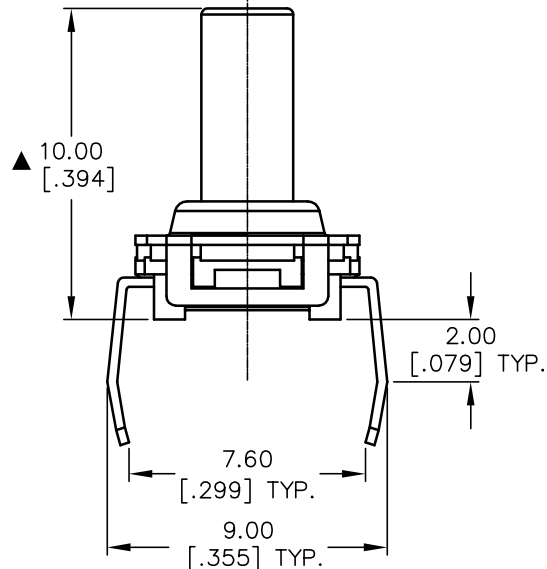
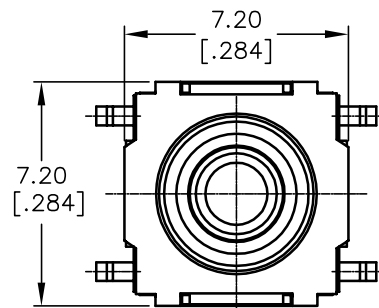
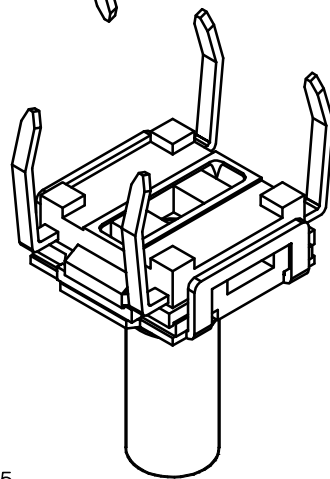
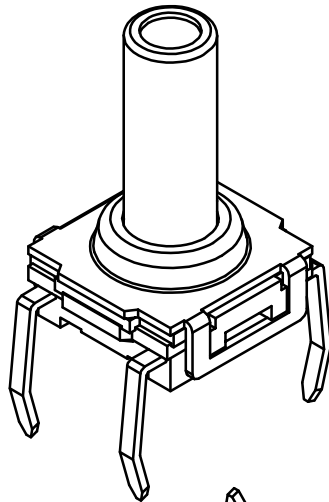


CIRCUIT DIAGRAM



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. OPERATING FORCE: 130±50gf
- ▲ 5. MECHANICAL LIFE: 100,000 ±20K CYCLES
6. TRAVEL: 0.30 +0.4mm
7. SWITCH VOLTAGE(MAX.): 50V
8. SWITCH POWER(MAX.): 1VA
9. CONTACT RESISTANCE: 50MILLI Ω @ 5VDC.
10. INSULATION RESISTANCE: 10000M Ω min.
11. BOUNCE(MAX.): <5m SEC.
11. OPERATING TEMPERATURE: -40°C TO +85°C
12. STORAGE TEMPERATURE: -55°C TO +85°C
13. PACKAGING: TUBE
14. ▲ DONOTES CRITICAL PARAMETER.

**E-SWITCH®**

TITLE

TL6100DF130QP

SCALE

4:1

DATE

1/23/04

DR

AR

DWG

D350012

REV

A

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

A	13737	RELEASED FOR PRODUCTION	1/23/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD