NOTES: UNLESS OTHERWISE SPECIFIED

LTR

REVISIONS

1. P/N: 34COLOR HOUSING: MOLDED NYLON 6 OR 6,6. AVAILABLE IN TEN COLORS. CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.


2. P/N: 9302COLOR
HOUSING: MOLDED NYLON 6,6. AVAILABLE IN
TEN COLORS.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL
PLATED.
HARDWARE: STAINLESS STEEL NUT. BRASS EYELET.
COPPER, TIN PLATED TERMINAL RING.

Ÿ

P/N: W-600/COLOR 18 AWG 65X36 TINNED COPPER INSULATION PVC 0.144 [3.66] NOMINAL O.D. AVAILABLE IN TEN COLORS.

4. PERFORMANCE

MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

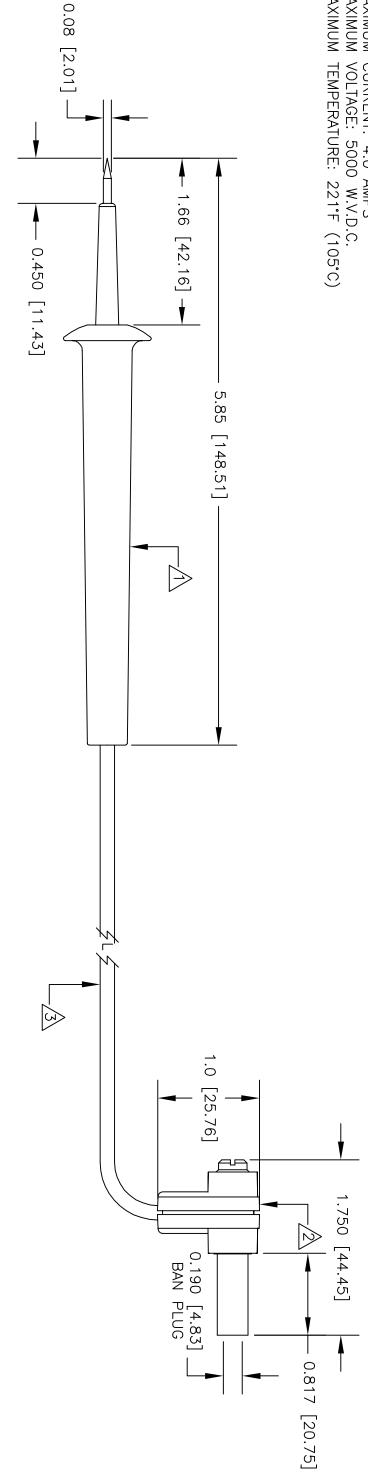

APPROVALS DATE    XX
DESCRIPTION PROBE (34) TO SHRD R/A BAN PLG (9302)  SIZE CODE IDENT NO. DRAWING NO.  B 08505 63334  SCALE 1:1 SHEFT 1 OF 1