Fair-Rite Products Corp.

Your Signal Solution®

Multi- Aperture cores (2861010002)



Part Number: 2861010002

67 MULTI- APERTURE CORE

Explanation of Part Numbers: – Digits 1 & 2 = Product Class – Digits 3 & 4 = Material Grade

-Last digit 2 = Burnished

Multi- aperture cores are used in suppression applications and in balun (balance- unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.

All multi- aperture cores are supplied burnished.

Our "Multi- Aperture Core Kit" (part number 0199000036) is available for prototype evaluation.

For any multi- aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.

Catalog Drawing 3D Model

Weight: 46 (g)

| Dim | mm | mm tol | nominal inch | inch misc. | | | |
|-----|------|--------|--------------|------------|-------|---|-----------|
| A | 30.2 | ±0.60 | 1.189 | | 6 | | 011111110 |
| В | 28.7 | ±0.70 | 1.13 | | | Е | 1111111 |
| С | 15 | ±0.40 | 0.591 | | | - | |
| E | 14.6 | ±0.40 | 0.575 | | | 1 | V1111111 |
| Н | 6.8 | ±0.2 | 0.268 | | - H - | | |

Figure 3


Chart Legend + Test frequency

| Typical I | mpedance | (| Ω) |
|---------------------|-----------|---|----|
| 100 MHz | 557 | | |
| 250 MHz | | 7 | 48 |
| Electrical | Propertie | s | |
| A _L (nH) | 800 Min | | |

Multi- aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and A_L value. The high frequency 67 material is controlled for A_L value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Multi- aperture cores in 73 and 43 material are measured for impedance on the E4990A Impedance Analyzer. The 61 and 67 multi- aperture cores are tested on the E4991A / HP4291B Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi- hole beads are tested for A_L value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

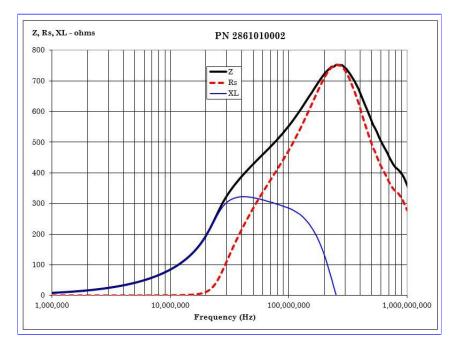

CSV Download

| | Fai | ir- Rite Products Co | orp. | | One Commercia | l Rov | v, Wallkill, New York 125 | 89-02 | 88 |
|--------------|-----|----------------------|------|-----|----------------|-------|---------------------------|-------|--------------------|
| 888-324-7748 | | 845-895-2055 | | Fax | : 845-895-2629 | | ferrites@fair- rite.com | | www.fair- rite.com |