

A

B

C





D

A


B

C

D

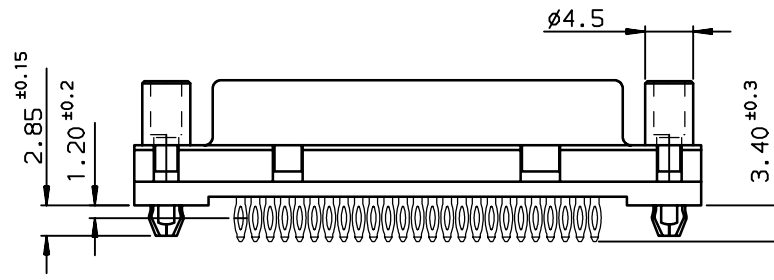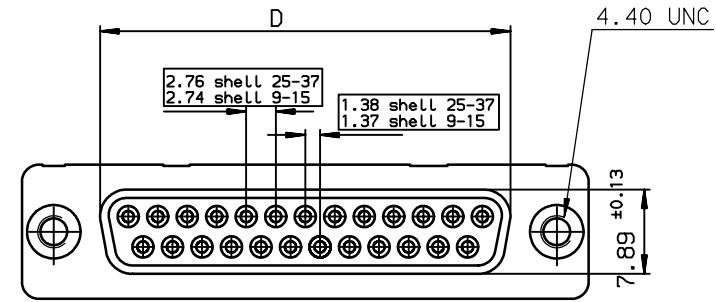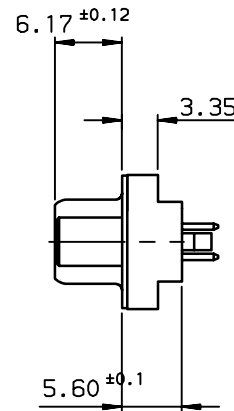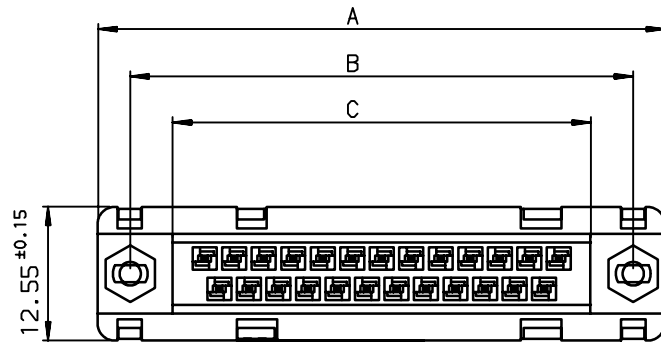

PC board drilling dimensions(after plating)
(thickness ≤ 3.20±0.30mm)

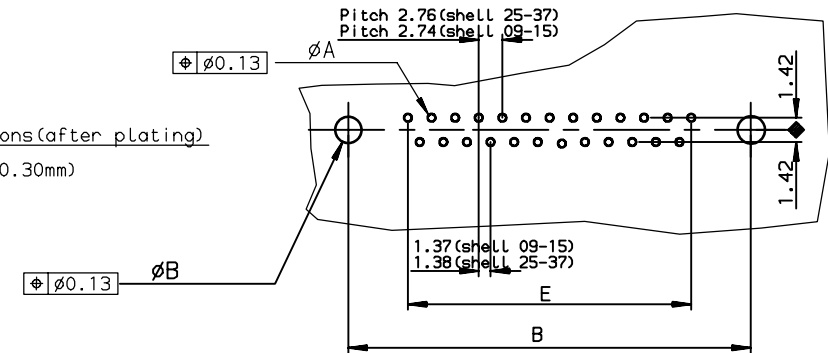

TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S90C4GV00	D09S90C6GV00
15	39.14	33.32	25.18	24.54	19.18	D15S90C4GV00	D15S90C6GV00
25	53.03	47.04	39.12	38.25	33.12	D25S90C4GV00	D25S90C6GV00
37	69.32	63.50	55.68	54.71	49.68	D37S90C4GV00	D37S901C6GV00
						gold flash	0.76µ gold

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S90C4GV00LF	D09S90C6GV00LF
15	39.14	33.32	25.18	24.54	19.18	D15S90C4GV00LF	D15S90C6GV00LF
25	53.03	47.04	39.12	38.25	33.12	D25S90C4GV00LF	D25S90C6GV00LF
37	69.32	63.50	55.68	54.71	49.68	D37S90C4GV00LF	D37S901C6GV00LF
						gold flash	0.76µ gold

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

European Views

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED										
Dr	PESSON	1995/10/03	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2		
Eng	PESSON	1995/10/03			0.XX	±0.1				
Chr	LEGARE	1995/10/03			0.XX' ±2°	0.XXX				
Appr	LEGARE	1995/10/03	Product family			D-SUB		Spec ref -		
			FEMALE CONNECTOR DELTA LOW PROFIL				dwg no C01-8646-0372	Rev. E		
			straight press-fit							
catalog no			-				CUSTOMER		sheet 1 of 1	

rev	ecn no	dr	date
B	-	JAR	1996/07/24
C	L505-004	MPE	2005/02/08
D	L506-0097	LGO	2006/07/29
E	L506-0140	LGO	2006/09/25
-	-	-	-
-	-	-	-
-	-	-	-