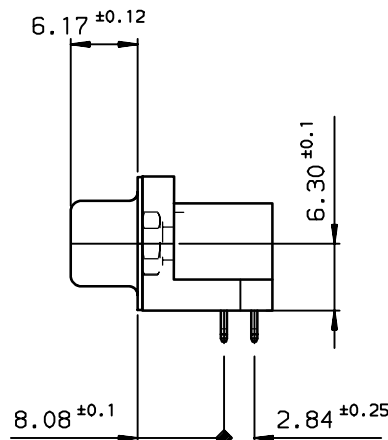
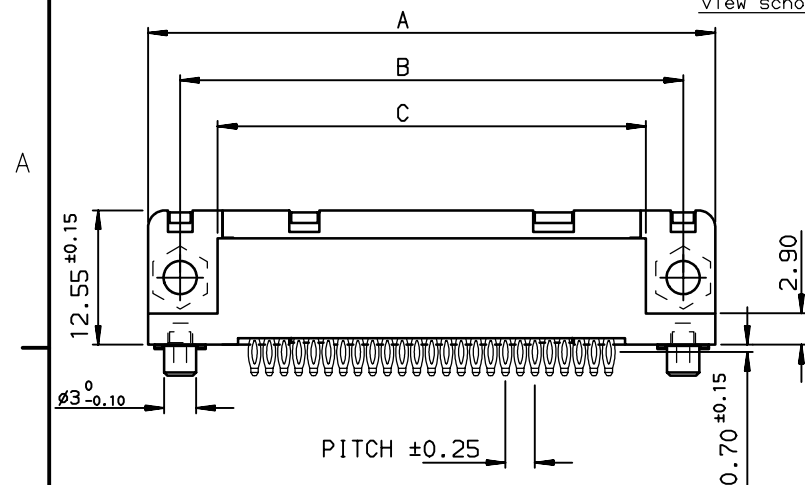
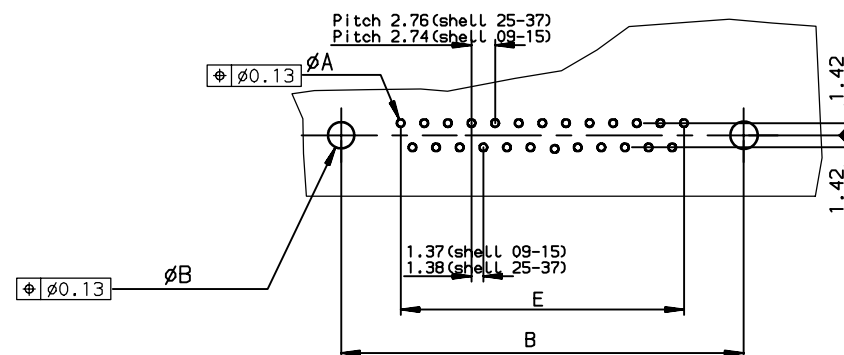
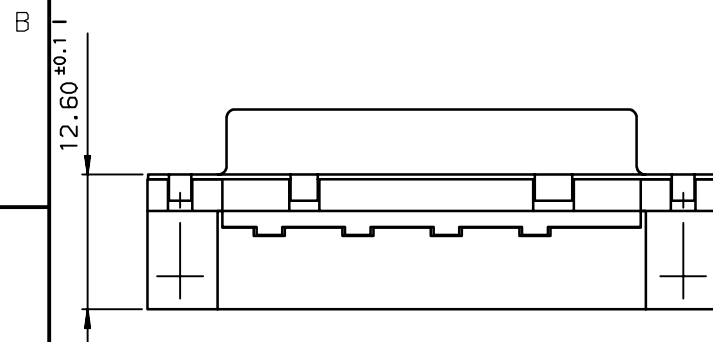
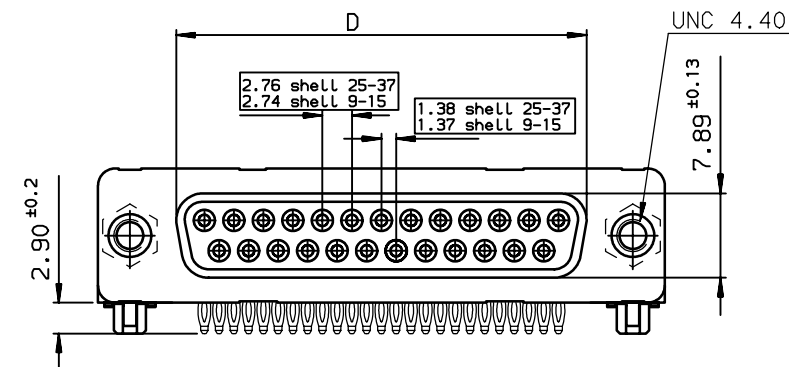



view shown without plastic pin and grounding

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.25 mm)

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	TIN LEAD PART NUMBER	TIN LEAD PART NUMBER	LEAD FREE PART NUMBER	LEAD FREE PART NUMBER
09	30.81	24.99	18.00	16.21	10.96	D09S80C4GX00	D09S80C6GX00	D09S80C4GX00LF	D09S80C6GX00LF
15	39.14	33.32	26.32	24.54	19.18	D15S80C4GX00	D15S80C6GX00	D15S80C4GX00LF	D15S80C6GX00LF
25	53.03	47.04	40.04	38.25	33.12	D25S80C4GX00	D25S80C6GX00	D25S80C4GX00LF	D25S80C6GX00LF
37	69.32	63.50	56.50	54.71	49.68	D37S80C4GX00	D37S80C6GX00	D37S80C4GX00LF	D37S80C6GX00LF
Gold flash						0,76 µ gold		Gold flash	

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

Detail of grounding strip



rev	ecn no	dr	date
D	-	MAS	1999/07/23
E	LS05-004	LMA	2005/01/03
F	LS06-0097	LGO	2006/07/29
G	LS06-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com			surface ISO 1302		tolerance std ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS		OTHERWISE SPECIFIED					
Dr	PESSON	1995/03/10	ANGULAR	LINEAR	0.X	±0.1	size A3	Scale 2		
Eng	PESSON	1995/03/10			0.XX	±0.1		ECN	LS06-0140	
Chr	LEGARE	1995/03/10			0.XXX	±0.1				
Appr	LEGARE	1995/03/10	Product family				D-SUB	Spec ref -		
			title FEMALE CONNECTOR DELTA D RIGHT ANGLED PRESS-FIT				dwg no C01-8646-0174		Rev. G	
catalog no			-				CUSTOMER		sheet	of 1

European Views