


1

2

3

4


view shown without plastic pin and grounding

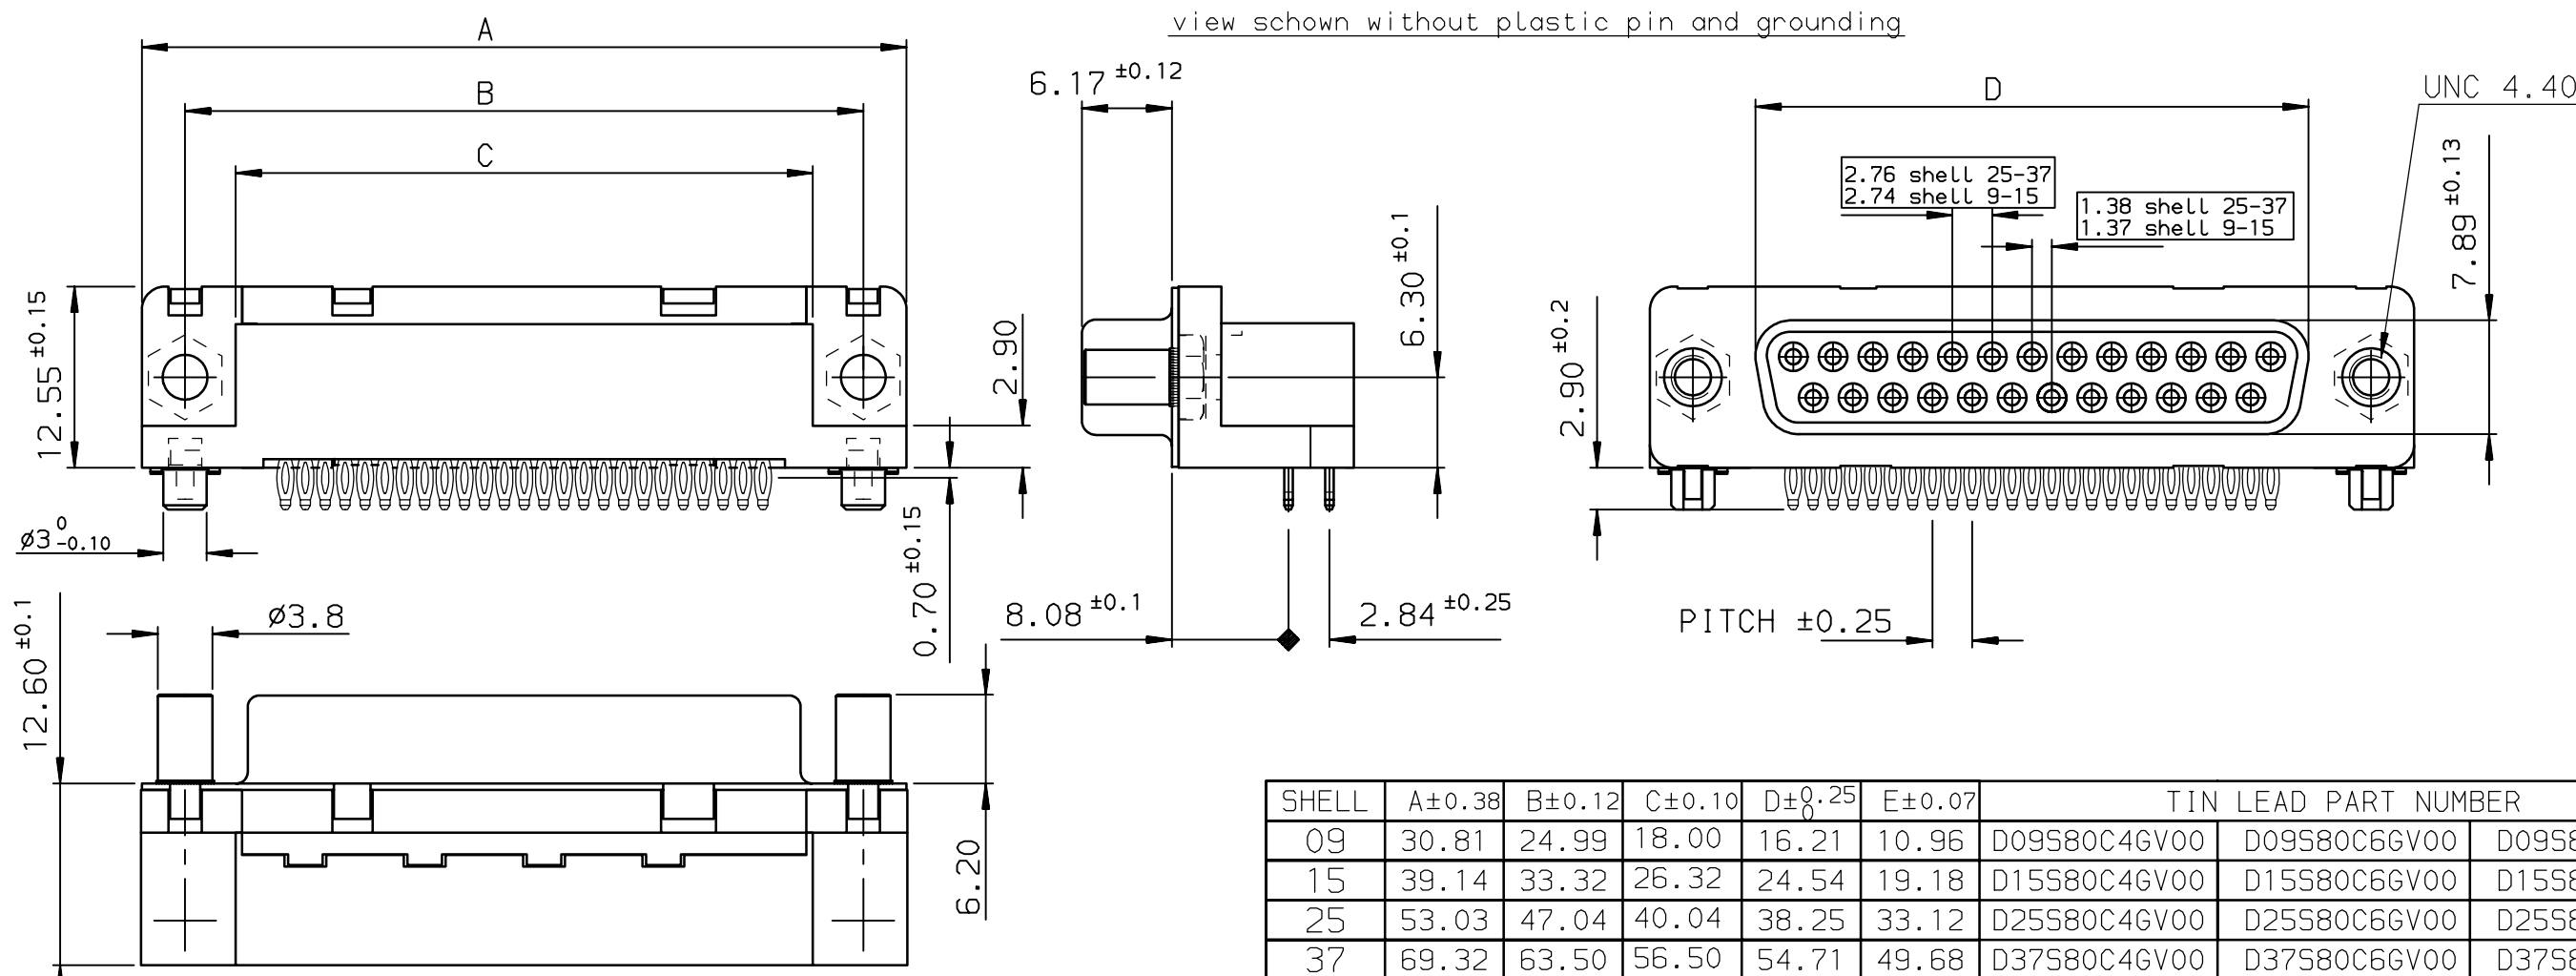


SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	TIN LEAD PART NUMBER		
09	30.81	24.99	18.00	16.21	10.96	D09S80C4GV00	D09S80C6GV00	D09S80C8GV00
15	39.14	33.32	26.32	24.54	19.18	D15S80C4GV00	D15S80C6GV00	D15S80C8GV00
25	53.03	47.04	40.04	38.25	33.12	D25S80C4GV00	D25S80C6GV00	D25S80C8GV00
37	69.32	63.50	56.50	54.71	49.68	D37S80C4GV00	D37S80C6GV00	D37S80C8GV00
						Gold flash	0,76 µ gold	1.27 µ gold

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	LEAD FREE PART NUMBER		
09	30.81	24.99	18.00	16.21	10.96	D09S80C4GV00LF	D09S80C6GV00LF	D09S80C8GV00LF
15	39.14	33.32	26.32	24.54	19.18	D15S80C4GV00LF	D15S80C6GV00LF	D15S80C8GV00LF
25	53.03	47.04	40.04	38.25	33.12	D25S80C4GV00LF	D25S80C6GV00LF	D25S80C8GV00LF
37	69.32	63.50	56.50	54.71	49.68	D37S80C4GV00LF	D37S80C6GV00LF	D37S80C8GV00LF
						Gold flash	0,76 µ gold	1.27 µ gold

Detail of grounding strip

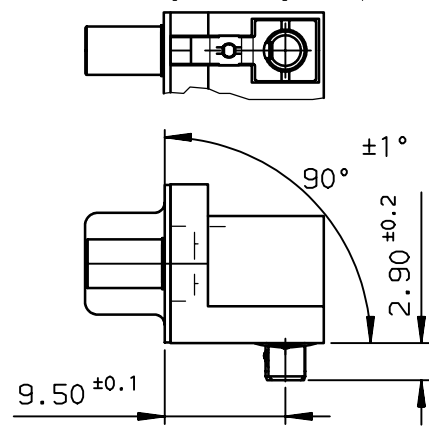

PC card drilling dimensions(after plating)
(thickness 1.60 ±0.25 mm)

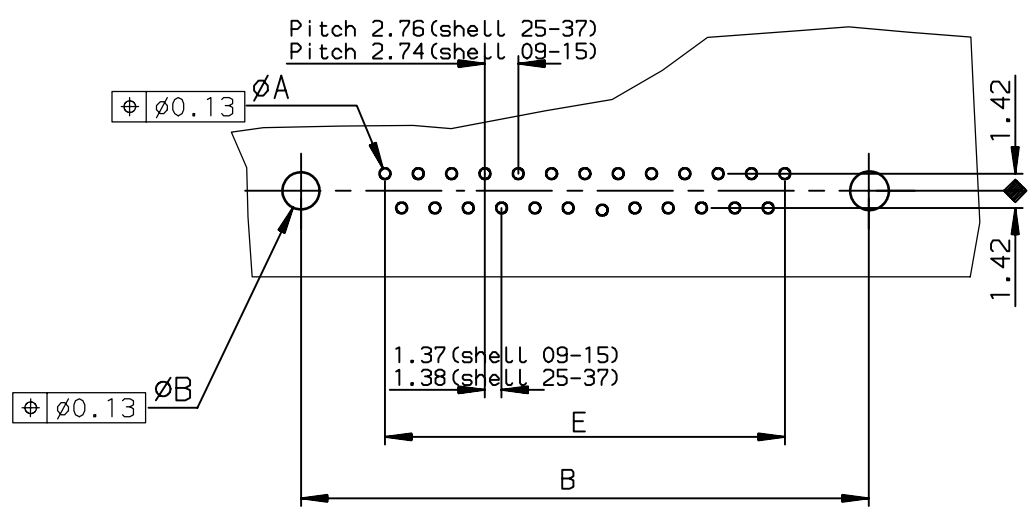

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0001

rev	ecn no	dr	date
E	-	ATC	2000/12/22
F	L505-0070	LGO	2005/09/12
G	L506-0097	LGO	2006/07/29
H	L506-0140	LGO	2006/09/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com

surface
ISO 1302

tolerance std
ISO 406 ISO 1101

projection
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

ANGULAR
LINEAR
0.X
±0.1
0.XX
±0.1
0.XXX
±0.1

size
A3

Scale
2

ECN
LS06-0140

Spec ref -

Dr
PESSON
1995/10/31

Eng
PESSON
2005/10/31

Chr
LEGARE
2005/10/31

Appr
LEGARE
2005/10/31

Product family
D-SUB

FEMALE CONNECTOR DELTA D
USA RA PF

Rev.
H

C01-8646-0412

CUSTOMER sheet 1 of 1