




## PS-6A-X40PS

Fiber optic fusion splice protector sleeve

### Product Dimensions

Sleeve Diameter After Shrinkage	<b>1.6 mm</b> (0.062 inch)
Supplied Internal Diameter	<b>0.35 mm</b> (0.0138 inch)
Single fiber size	<b>250 µm</b>
Reinforcing Member	<b>Stainless Steel Rod 0.8mm</b> (0.032 inch)
Color	<b>Clear</b>
Package Quantity	<b>Bag 50</b>

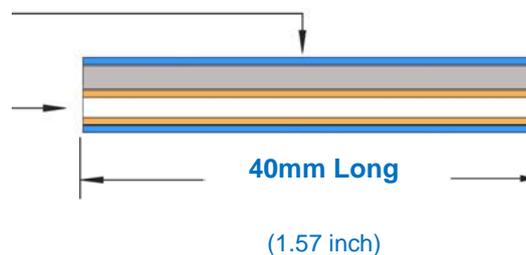

- Heat Shrink Outer Polyolefin Tube
- Hot-Melt Adhesive Inner Tube
- Stainless Steel Reinforcing Rod

### Product Features

- Provides mechanical and environmental protection to fiber splices after fusion splicing
- Bellcore (Telcordia) GR-1380-CORE Certification
- UL 224 approved YDPU2.E467437 high quality materials
- Pre-shrunk heat bonded design for faster installation
- Single fibre aperture for easier fiber insertion
- Stainless steel reinforcing pin
- 25+ years of specialist manufacturing experience with proven long-term reliability
- Compatible with most optic fibers, splice trays and splice ovens
- RoHS & REACH Compliant and Conflict Free



Member #0240

