




PS-94-X30C

8 Ribbon Fiber fusion splice protector sleeve

Product Dimensions

Sleeve Diameter After Shrinkage	2.8-3.7 mm (0.12 x 0.14 inch)
Supplied Internal Rectangular Bore	3.0 x 1.0 mm (0.12 x 0.04 inch)
Ribbon fiber size	1-8 Way
Reinforcing Member	White Ceramic Rod
Color	Clear
Package Quantity	Bag 50

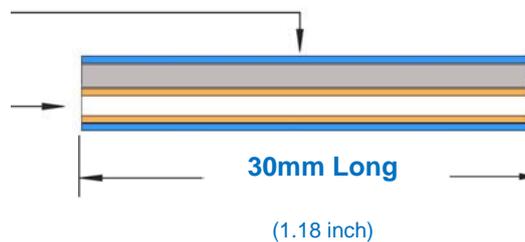

- Heat Shrink Outer Polyolefin Tube
- Hot-Melt Adhesive Inner Tube
- Ceramic Reinforcing Pin

Product Features

- Provides mechanical and environmental protection to fiber splices after fusion splicing
- Bellcore (Telcordia) GR-1380-CORE Certification
- UL 224 approved YDPU2.E467437 high quality materials
- Pre-shrunk heat bonded design for faster installation
- Single fibre aperture for easier fiber insertion
- White Ceramic reinforcing member
- 25+ years of specialist manufacturing experience with proven long-term reliability
- Compatible with most ribbon fibers, splice trays and ribbon splice ovens
- RoHS & REACH Compliant and Conflict Free



Member #0240

