



PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

| REVISION | | | |
|----------|-----------------------------------|----------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 06/17/02 | BS |
| B | UPDATE TERMINALS, RFS.3928, BS | 06/23/04 | BS |
| C | UPDATE DRAWING , RFS.8951, BS | 07/24/06 | BS |
| D | UPDATE ROJ LENGTHS , RFS.9426, BS | 09/29/06 | BS |

A

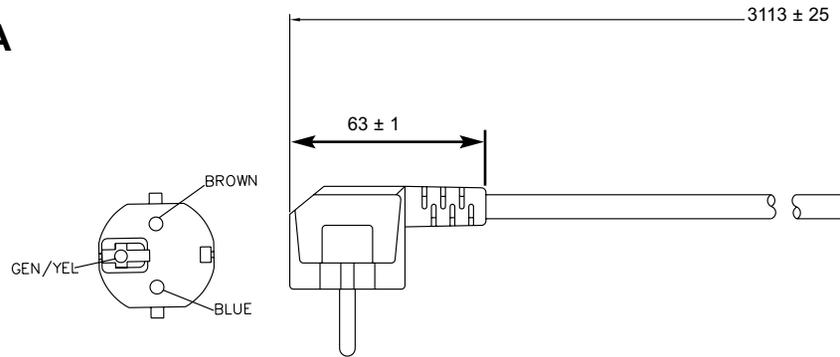

B

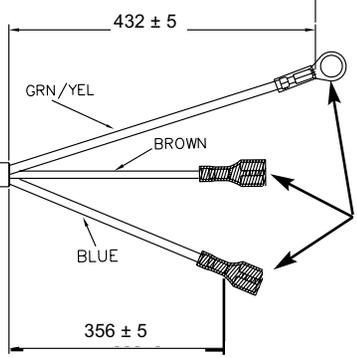

LENGTH IS MEASURED FROM END OF JACKET TO END OF CONDUCTOR BEFORE TERMINAL IS APPLIED.



GENERAL SPECIFICATIONS:

RATING: 16A / 230V AC
 CABLE TYPE / SIZE: H05VV-F, 3 x 1.5 mm²
 TEMPERATURE RATING: 70° C
 CONDUCTOR COLORS: BROWN / BLUE/ GREEN-YELLOW
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 3113 ± 25 mm
 CABLE OUTER DIAMETER: 8.5 ± 0.2 mm
 END 'A' PLUG: CEE 7/7 RIGHT ANGLE
 END 'B' : SEE TERMINATION TABLE
 APPROVALS PLUG: VDE, N, S, D, FI, KEMA, USE, CE, BEC, OVE, CE
 APPROVALS CABLE: VDE, N, S, D, FI, KEMA, SEV, CE, BEC, OVE

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).
2. ALL TERMINALS MUST BE **UL** RECOGNIZED.



CONDUCTOR TERMINATION TABLE:

| Wire | Color | ROJ± 5 mm | RIJ±1mm | Terminal |
|---------|---------|-----------|---------|--|
| NEUTRAL | BLUE | 370 | - | 0.25" FASTON FULLY INSULATED AMP P/N 3-520140-2, FDFN2-250 OR EQUIV. |
| LINE | BROWN | 370 | - | 0.25" FASTON FULLY INSULATED AMP P/N 3-520140-2, FDFN2-250 OR EQUIV. |
| GROUND | GRN/YEL | 435 | - | RING TERMINAL IS #10 DOUBLE CRIMP TYPE, AMP 40661 OR EQUIV. |

PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

| DASH NO. | PART NO | REV. | DESCRIPTION | NOTES |
|-------------------------|----------------|---|---|---|
| TABULATION BLOCK | | | | |
| | | | TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005 MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013 | GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111 |
| INIT.BY: BS | DATE: 07/24/06 | DWG TITLE: EUROPEAN NON-DETACHABLE CORD | | |
| DRAWN: NF | DATE: 07/24/06 | FSCN No.: G, CC | SIZE: A | REV. D |
| APRVD: HM | DATE: 07/24/06 | SCALE: NONE | PART NO: 23134283M0QQR(R) | SHEET 1/1 |

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice