

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 6-20P to CUT BLUNT, GT Cable #128-60: 18 / 3 Conductors, 7.8mm OD, SJTO, 60 Degree, 300V, BLK/WHT/GRN, Approvals: ,1500mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 3601281M500(R)	Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
B	UPDATE TO NEW FORMAT	DR	12/18/2019	DR
A	INITIAL RELEASE, RFS. 27244	DR	11/30/2018	BS

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <https://www.globtek.com/iso-certificates/>

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:

Customer P/N:

Quote Number:

Date:

Authorized Representative Name:

Authorized Representative Signature:

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek terms and conditions, which supersede all other agreements, terms, and conditions (<https://en.globtek.com/terms-and-conditions/>).

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 6-20P to CUT BLUNT, GT Cable #128-60: 18 / 3 Conductors, 7.8mm OD, SJTO, 60 Degree, 300V, BLK/WHT/GRN, Approvals: ,1500mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 3601281M500(R)	Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.
Contents of this document are subject to change without prior notice.

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 6-20P to CUT BLUNT, GT Cable #128-60: 18 / 3 Conductors, 7.8mm OD, SJTO, 60 Degree, 300V, BLK/WHT/GRN, Approvals: ,1500mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 3601281M500(R)	Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Cordset Information:
CordsetColor:GlobTek Black
Cord Length (mm):1500


NOTES:

Cord, Plug and Connector must be marked with approval symbols of file number(s)

END A

END B

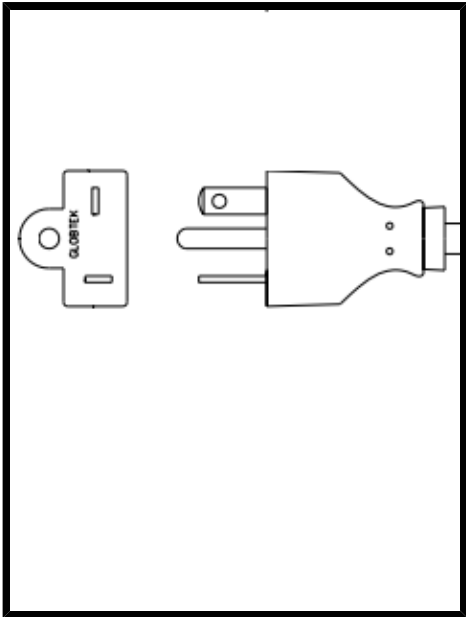



CUT BLUNT



GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 6-20P to CUT BLUNT, GT Cable #128-60: 18 / 3 Conductors, 7.8mm OD, SJTO, 60 Degree, 300V, BLK/WHT/GRN, Approvals: ,1500mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 3601281M500(R)	Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE


End A Code:360 Description:NEMA 6-20P Rating (V):250 Rating (A):10.0 Gender:Male Overmolded:Yes	Cable Code:128-60 Description:GT Cable #128-60: 18 / 3 Conductors, 7.8mm OD, SJTO, 60 Degree, 300V, BLK/WHT/GRN, Approvals: Color:GlobTek Black Wire Gauge(AWG):18 Cond:3 Type:SJTO Temperature:60 Amps:10 Volts:300 OD: ConductorsColors	End B Code:BBB Description:CUT BLUNT Rating (V):0 Rating (A):0.0 Gender:Male Overmolded:No
Overall cable rating:250V/10A		

Plug Approvals		Cable Approvals		Connector Approvals	
	UL for Power Cords		UL for Power Cords		
	CSA or cUL for Power Cords		CSA or cUL for Power Cords		

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: NEMA 6-20P to CUT BLUNT, GT Cable #128-60: 18 / 3 Conductors, 7.8mm OD, SJTO, 60 Degree, 300V, BLK/WHT/GRN, Approvals: ,1500mm, GlobTek Black	
	Model No. Power Cord	
	Part No./Ordering No. 3601281M500(R)	Rev B

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT <https://www.globtek.com/connectors/> STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <https://www.globtek.com/connectors/> ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

Hanking:200
Description:200 +/- 20mm
Image:

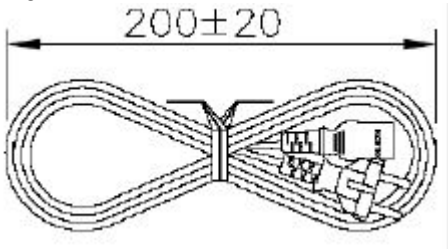

Notes/Modifications/Customizations (notes in this section supersede the values shown in the standard spec):