
PROPRIETARY INFORMATION: PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION									
REV	DESCRIPTION	DATE	DATE APPROVED						
A	INITIAL RELEASE, RFS.2241, DMR	09/16/03	BS						
В	UPDATE DRAWING, RFS.5224, JL	12/22/04	BS						
С	ADD ROHS, RFS. 13345, SO	04/07/08	BS						
D	REVISE RATING, RFS. 15203, BS	12/08/08	BS						
Е	CORRECT LENGTH TOLERANCE, RFS. 20723, BS	04/08/11	HM						

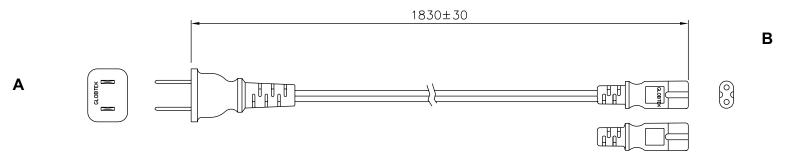

GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC

CABLE TYPE / SIZE: SPT-2, 18 AWG X 2, VW-1, FT2

TEMPERATURE RATING: 60° C CABLE JACKET COLOR: BLACK

OVERALL LENGTH (L): 1830 ± 30 mm $3.4 \times 6.9 \pm 0.2 \text{ mm}$ CABLE OUTER DIAMETER:


NEMA 1-15P (NON-POLARIZED) END 'A' TERMINATION:

END 'B' TERMINATION: IEC 320 /C7 APPROVALS PLUG: UL, CSA or cUL APPROVALS CABLE: UL. CSA or cUL APPROVALS CONNECTOR: UL, CSA or cUL

PACKING:

HANKED

L = 125 ± 25 mm





NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).





SP OR CUL) US

			DASH NO.	PART NO	REV.	/. DESCRIPTION		NOTES			
				TABULATION BLOCK							
				TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1* .xxx +/005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Nort Tel. 201-784-1000 Fz					
Contents of this document are subject to change without prior notice		Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.	INIT.BY:	DATE: 07/31/02	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/013		DWG TITLE: NORTH AMERICAN DETACHABLE CORDSET				
			DRAWN: NF	DATE: 07/31/02	FSCN No. G, CC	: SIZE A	MODEL: N / A	rev. E			
			APRVD: BS	DATE: 07/31/02	SCALE:	NONE	PART NO: 4511116F703A(R)	SHEET 1/1			