


Number of contacts

15

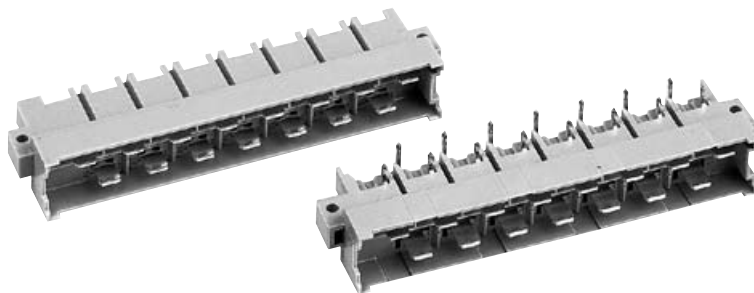

Male connectors

Identification	Number of contacts	Part No.	Drawing	Dimensions in mm
Male connector for faston 6.3 x 2.5	15	Performance level 1 ⁴⁾ 09 06 015 2912 ¹⁾	Contact arrangement View from termination side Board drillings	
1 leading contact (position z 32)	14 + 1	09 06 015 2931 ¹⁾		
2 leading contacts (position z 4 + z 32)	13 + 2	09 06 015 2922 ¹⁾		
Male connector with angled solder pins ³⁾	15	Performance level 1 ⁴⁾ 09 06 115 2911 ¹⁾	Contact arrangement View from termination side Board drillings	
1 leading contact (position z 32)	14 + 1	09 06 115 2932 ¹⁾		
2 leading contacts (position z 4 + z 32)	13 + 2	09 06 115 2921 ¹⁾ 09 06 115 2991 ²⁾		
Male connector with straight solder pins	15	Performance level 1 ⁴⁾ 09 06 015 2913 ¹⁾	Contact arrangement View from termination side Board drillings	
1 leading contact (position z 32)	14 + 1	09 06 015 2914 ¹⁾		

¹⁾ Variant with silver plated contacts²⁾ Variant with gold plated contacts³⁾ With shroud coding, see also page 03.26⁴⁾ Acc. to IEC 60 603-2