

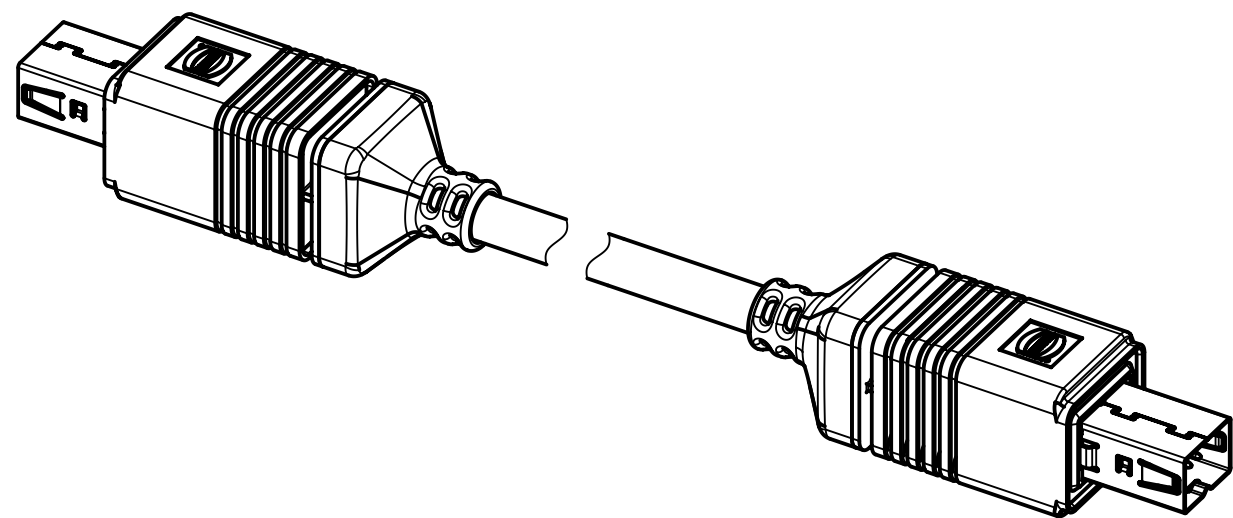


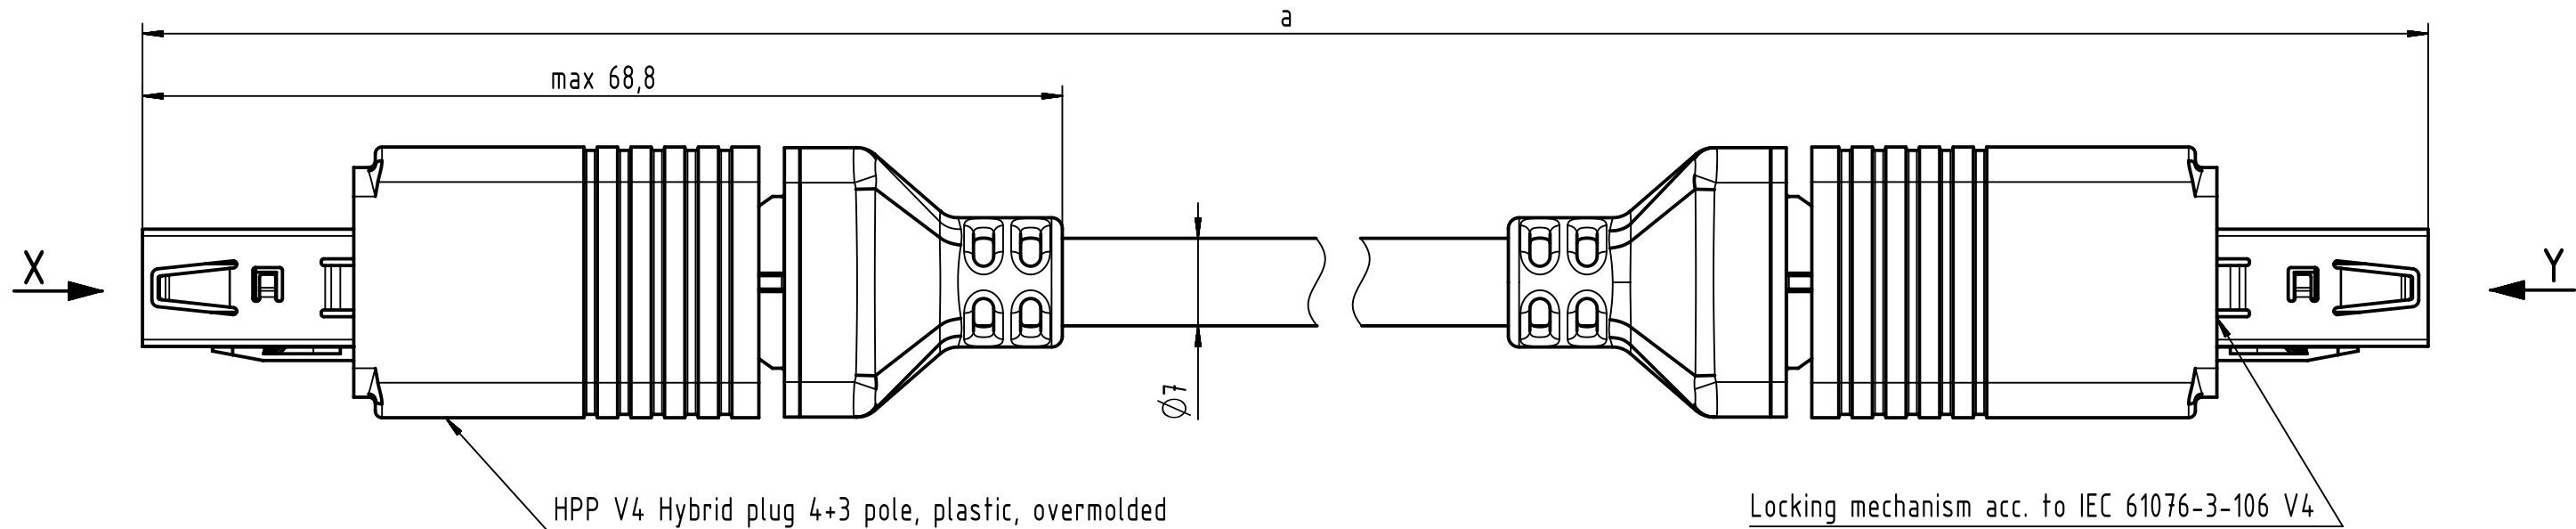


- Protection level: IP67/65
- Temperature range: -40°C ... +70°C

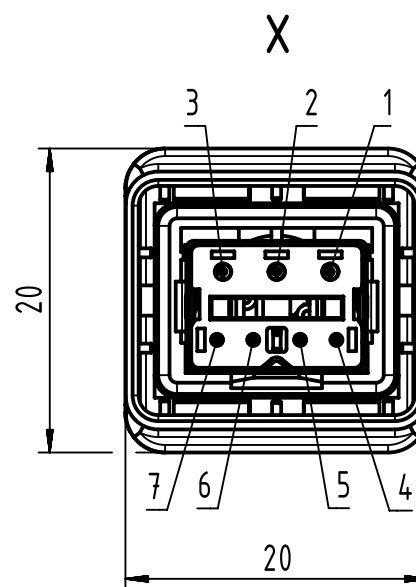

Loading-Plan:

- Power wires
- | | | |
|---|--------|---|
| 1 | red | 1 |
| 2 | brown | 2 |
| 3 | yellow | 3 |

- Data wires
- | | | |
|---|--------|---|
| 4 | blue | 4 |
| 5 | white | 5 |
| 6 | orange | 6 |
| 7 | yellow | 7 |

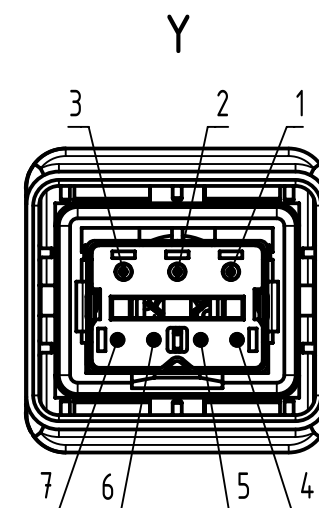

8	094 76161200	RJ45 Ethernet Hybrid Cable, 4xAWG 26/7, 3xAWG 20/7, Cat.5, PUR, black	20
7	094 76161100		10
6	094 76161050		5
5	094 76161030		3
4	094 76161020		2
3	094 76161010		1
2	094 76161008		0.8
1	094 76161005		0.5
Cont. no.	Part no.	Type of cable	Dim. a[m]

		All Dimensions in mm Original Size DIN A3		Scale 2:1		Free size tol.		Ref.	
								Sub.	
		All rights reserved		Created by MUNTEANV		Inspected by AVRAM		Standardisation KOHLER	
		Department EC PD - RO				Date 2016-02-11		State Final Release	
HARTING Electronics GmbH D-32339 Espelkamp				Title HPP V4 Hybrid Cable Assembly					Doc-Key / ECM-Nr. 100176574/UGD/006/D 500000100339
				Type TB		Number 094 76161XXX			Rev. D