



Connector Location A


Connector Location B

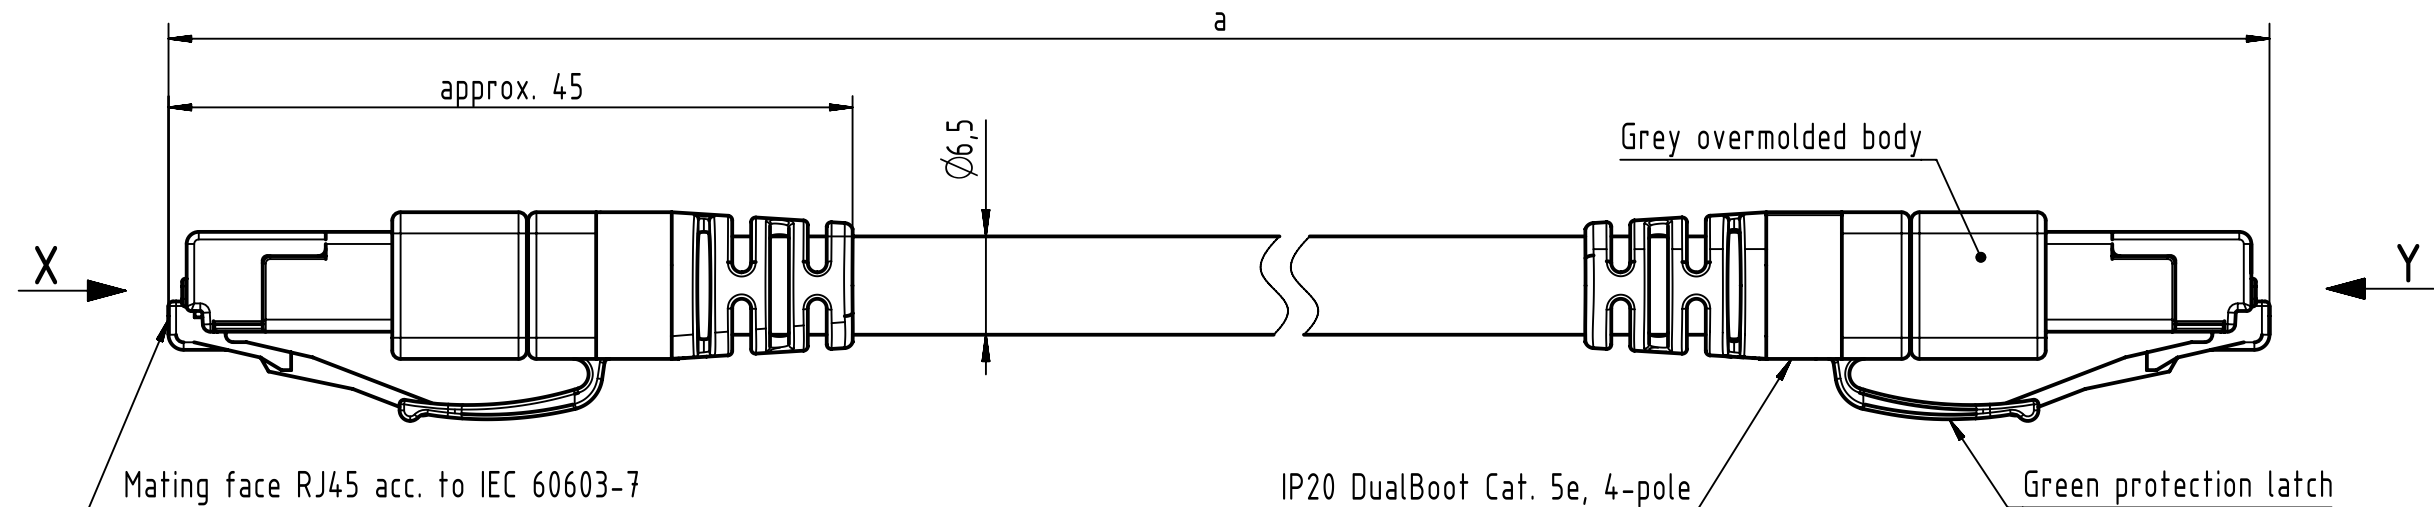



X
male

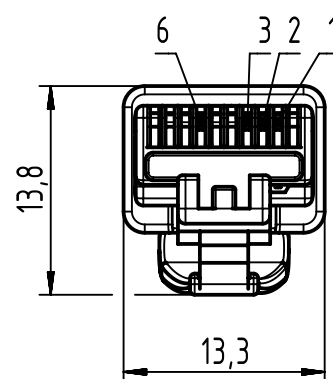

Loading-Plan

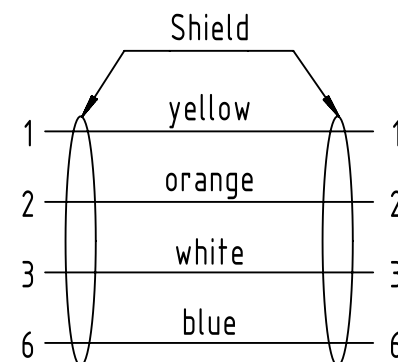

Y
male

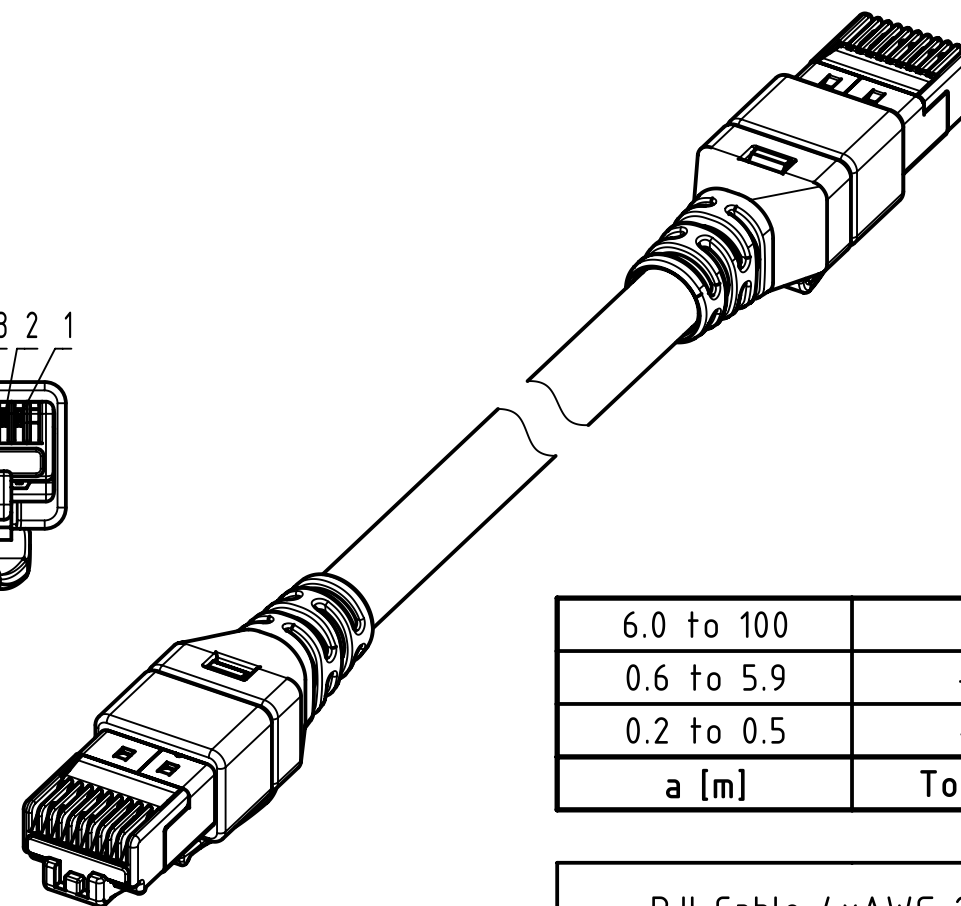

6.0 to 100	±1%
0.6 to 5.9	+0.04
0.2 to 0.5	+0.02
a [m]	Tolerance

length in "1m" step	100	XXX=000
	99	XXX=990
	.	.
	12	XXX=120
length in "0.1m" step	11	XXX=110
	10	XXX=100
	9.9	XXX=099
	9.8	XXX=098
	.	.
	0.5	XXX=005
	0.4	XXX=004
	0.3	XXX=003
	0.2	XXX=002
Step	a [m]	XXX

NOTE:

For lengths < 1.0m:

- relative positioning of the connectors to each other shall be as presented in the drawing, however with an admissible angular deviation around cable axis of ± 30°

For lengths ≥ 1.0m:

-relative positioning of the connectors to each other not obligatory

- Temperature range: -25°C ... +60°C

RJ1 Cable 4xAWG 22/7,
Cat. 5, PVC, Type B, green

09486868001XXX

Type of cable

Part no.

All Dimensions in mm		Tech. Character.		Free size tol.		According to production drawing	
All rights reserved		Created by STOCHECIC Stocheci		Inspected by COSTEA Costea		Standardisation MUNTEANV Muntean	
Department HCS - RO		Title RJ1 PROFINET cable PVC 4p; Cat. 5		Date 2018-11-22		State Final Release	
HARTING Customised Solutions		Type TB		Number 09486868001XXX		Doc-Key / ECM-Nr. 100544207/UGD/044/E 500000143802	
D-32339 Espelkamp						Rev. E	
						Page 1/1	