

5

4

3

2

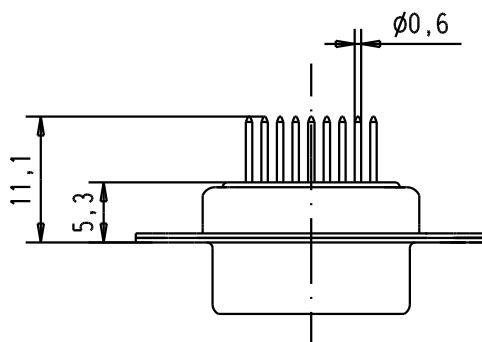
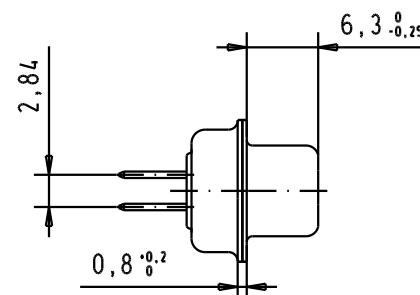
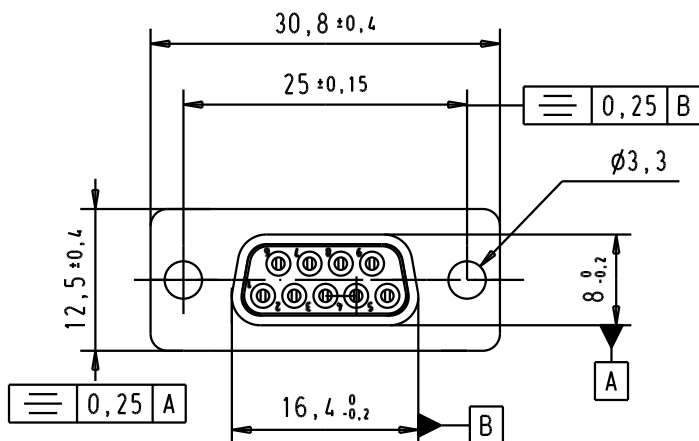
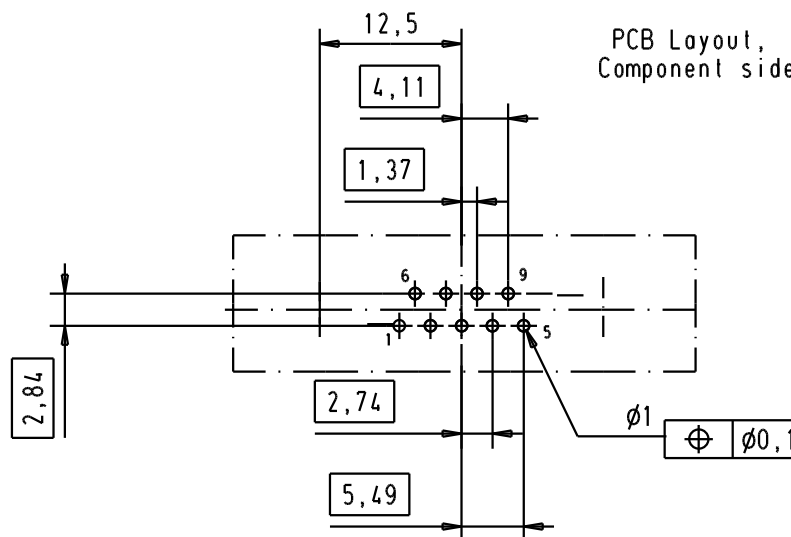
1


SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	47pf±20%
Working Voltage	100V
Current rating	7.5 A
Insulation Resistance	>1GΩ

Minimum Insertion Loss

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

PCB Layout,
Component side

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, female, straight 9 Poles, turned solder pin, tin plated shell and hole	Ma?Ms lab/ Scale 1.5:1
			Detail.	8-JUL-02	CV			
			Insp.					
			Stand.					
31894	29/04/04	AF					TB 09641127210	Blatt/ Page 1 / 1
31058	8-JUL-02	CV						
Mod.	Dat.	Name						
					HARTING EURL F-95972 Paris			

Sub.