
[illegible]

FREQUENCY (MHz)	ATTENUATION (dB)
5	1dB
10	3dB
50	12dB
100	20dB
500	34dB
1000	30dB

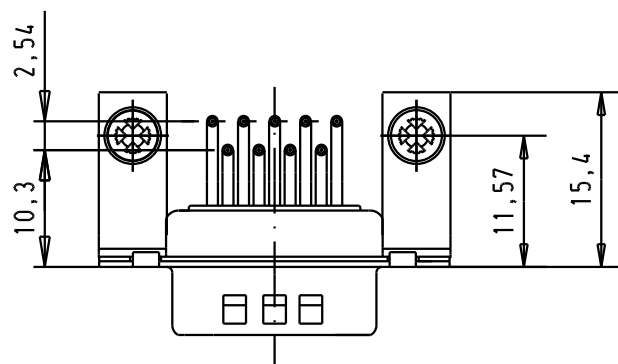

							Dat.	Name		D-Sub, male, angled, 9 Poles, solder pins, tin plated shell with dimples, brackets, clinch nuts and board-locks	Mo?Ms lab/ Scale 1.5:1	
						Detail.	13/10/05	JMDR				
						Insp.						All Dim. in mm
						Stand.						Orig. Size DIN A 4
09641247233	M3		33240	13/10/05	JMDR	HARTING EURL F-95972 Paris				TB 0964124723x	Battl/ Page 1 / 4	
09641247232	UNC 4-40		31058	8-JUL-02	CV							
Part number	Nut thread		Mod.	Dat.	Name							