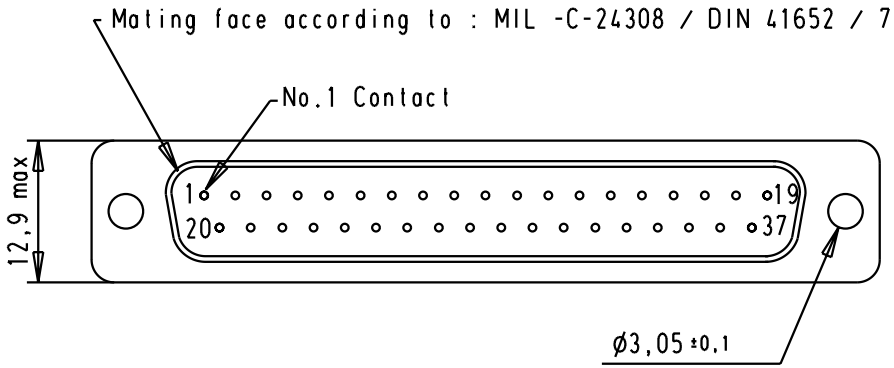



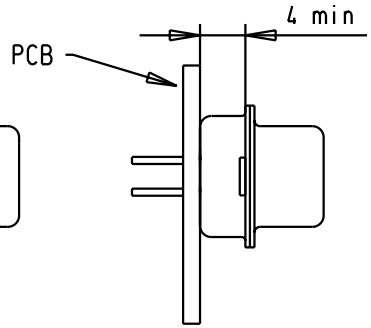

Assembly position

SPECIFICATION

Mating Cycles	200
Capacitance	47pf±20%
Working Voltage	100v
Current Rating	7,5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

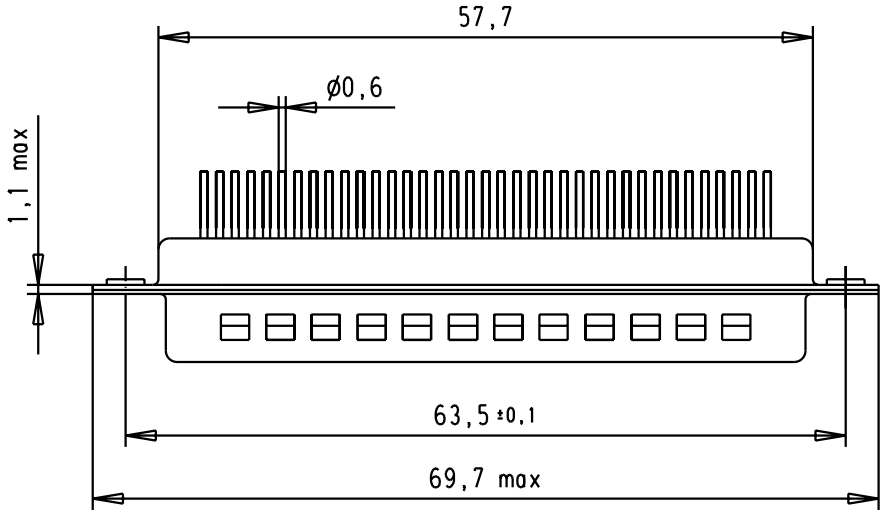

PCB Layout
Component side

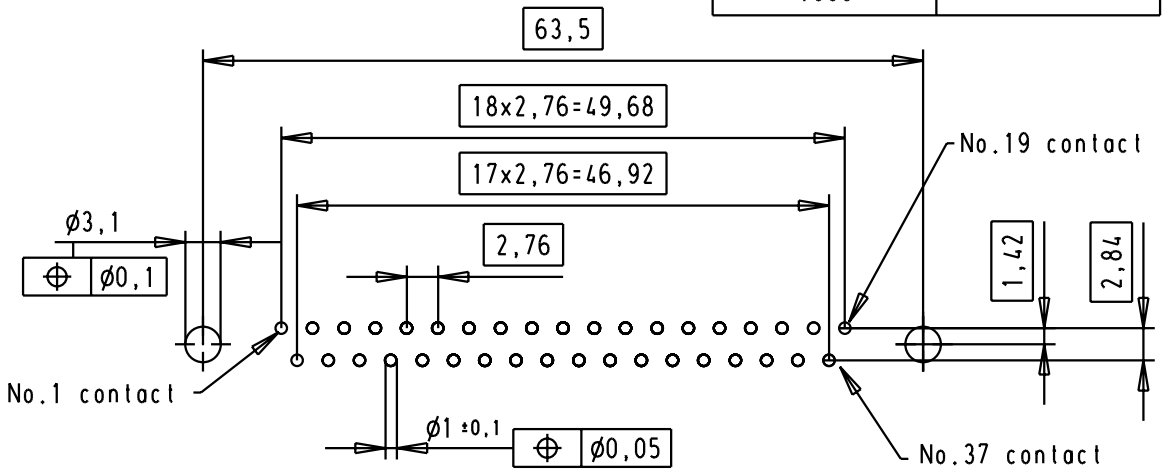

				Dat.	Name
			Detail.	8-JUL-02	CV
			Insp.		
			Stand.		
31058	8-JUL-02	CV			
Mod.	Dat.	Name			

All Dim. in mm
Orig. Size DIN A 4

D-Sub, male, straight, 37 Poles, with turned solder pin and hole

Ma?Mstab/ Scale: 1.5:1

HARTING EURL
F-95972 Paris

TB 09644227210

Sub.

Blatt/ Page 1/1