


Specification Sheet

Part Number: 111-00659

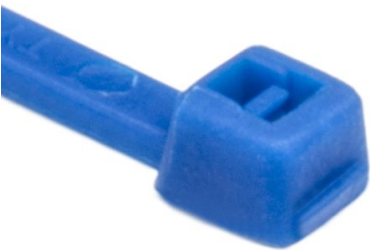

High-Temp Cable Tie, 4" Long, UL Rated, 18lb Tensile Strength, ETFE, Blue, 100/pkg

Article Number	111-00659
Type	T18R
Color	Blue (BU)
Features & Benefits	• ETFE cable ties provide excellent resistance to chemicals, radiation, high temperatures and UV exposure. • Inside serrations allows for strong grip on cables and wire bundles. • Head design provides high tensile strength with very low insertion force. • Bent tail ensures a quick and simple installation.
Quantity Per	bag

Product Description	ETFE ties provide excellent protection against radiation, ultraviolet light, and a wide range of chemicals. They are also rated for low outgassing applications. HellermannTyton's ETFE ties come in a standard color of blue for easy identification. T-Series Cable Ties feature inside serrations to provide a positive hold on wire and cable bundles. The head design guarantees high tensile strength and a low insertion force. The bent tail design allows quick and simple installations by hand. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.
Short Description	High-Temp Cable Tie, 4" Long, UL Rated, 18lb Tensile Strength, ETFE, Blue, 100/pkg
Global Part Name	T18R-E/TFE-BU
Minimum Tensile Strength (Imperial)	18.0
Minimum Tensile Strength (Metric)	80
Length L (Imperial)	4.0
Length L (Metric)	101.6
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.1
Width W (Metric)	2.5

Bundle Diameter Min (Imperial)	0.2
Bundle Diameter Min (Metric)	5.0
Bundle Diameter Max (Imperial)	0.86
Bundle Diameter Max (Metric)	22.0
Thickness T (Imperial)	0.05
Thickness T (Metric)	1.2
Height H (Metric)	3.7
Material	Ethylenterafluoroethylene (E/TFE)
Material Shortcut	E/TFE
Flammability	UL 94 V0
Operating Temperature (Metric)	-112°F to +338°F (-80°C to +170°C)
Reach Complaint(Article 33)	Yes
ROHS Complaint	Yes
Certification/Specification WEB	UL ANSI/UL 1565 UL ANSI/UL 62275
UL Recognized (US)	Yes

UL Recognized (US and Canada)	Yes
Package Quantity(Imperial)	100
Package Quantity (Metric)	100
Customs Number	3926909988
Content Unit(BMEcat)	pcs.
Weight (Metric)	0.28