


Specification Sheet

Part Number: 170-03082

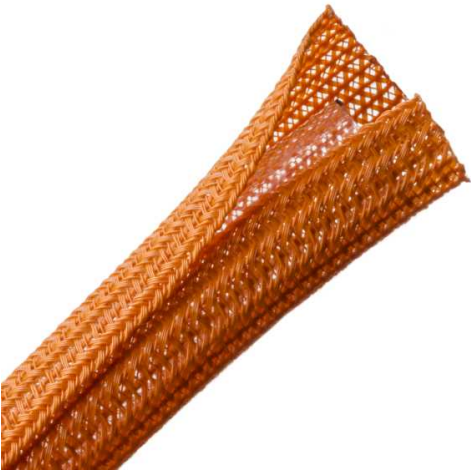

Braided Sleeving, Split Wrap, 0.25" Dia, PET, Orange, 200 ft/bulk reel

|                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article Number      | 170-03082                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Type                | BSPSW143B                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Color               | Orange (OG)                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Features & Benefits | <ul style="list-style-type: none"><li>• Split wrap design needs no fasteners and installs quickly, saving assembly time and future accessibility without disassembly.</li><li>• Bends to a tight radius without distortion or splitting open.</li><li>• Unique construction retains shape and rigidity throughout unrolling.</li><li>• Easy open design allows quick access and ability to apply protective sleeving post assembly or post installation situations.</li></ul> |
| Quantity Per        | box                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

|                                       |                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Description</b>            | A lateral split semi-rigid braided sleeving configuration used when ease of installation and repeat access to wire bundle is required. The lateral split allows the sleeving to open and accommodate a variety of bundling requirements. The 25% edge overlap rolls back over connectors and splices without exposing the bundled wires. |
| <b>Short Description</b>              | Braided Sleeving, Split Wrap, 0.25" Dia, PET, Orange, 200 ft/bulk reel                                                                                                                                                                                                                                                                   |
| <b>Global Part Name</b>               | BSPSW143B-PET-OG                                                                                                                                                                                                                                                                                                                         |
| <b>Length L (Imperial)</b>            | 200.0                                                                                                                                                                                                                                                                                                                                    |
| <b>Length L (Metric)</b>              | 61.0                                                                                                                                                                                                                                                                                                                                     |
| <b>Bundle Diameter Min (Imperial)</b> | 0.1                                                                                                                                                                                                                                                                                                                                      |
| <b>Bundle Diameter Min (Metric)</b>   | 2.54                                                                                                                                                                                                                                                                                                                                     |
| <b>Bundle Diameter Max (Imperial)</b> | 0.25                                                                                                                                                                                                                                                                                                                                     |
| <b>Bundle Diameter Max (Metric)</b>   | 6.4                                                                                                                                                                                                                                                                                                                                      |
| <b>Diameter D (imperial)</b>          | 0.25                                                                                                                                                                                                                                                                                                                                     |
| <b>Diameter D (metric)</b>            | 6.4                                                                                                                                                                                                                                                                                                                                      |
| <b>Nominal Diameter (Imperial)</b>    | 0.25                                                                                                                                                                                                                                                                                                                                     |
| <b>Nominal Diameter (Metric)</b>      | 6.4                                                                                                                                                                                                                                                                                                                                      |
| <b>Wall Thickness WT (Imperial)</b>   | 0.025                                                                                                                                                                                                                                                                                                                                    |

|                                       |                                   |
|---------------------------------------|-----------------------------------|
| <b>Wall Thickness WT (Metric)</b>     | 0.64                              |
| <b>Material</b>                       | Polyester (PET)                   |
| <b>Material Shortcut</b>              | PET                               |
| <b>Flammability</b>                   | UL 94 V0                          |
| <b>Halogen free</b>                   | Yes                               |
| <b>Operating Temperature (Metric)</b> | -94°F to +257°F (-70°C to +125°C) |
| <b>Reach Complaint(Article 33)</b>    | Yes                               |
| <b>ROHS Complaint</b>                 | Yes                               |
| <b>UL Recognized (US)</b>             | Yes                               |
| <b>Package Quantity(Imperial)</b>     | 200                               |
| <b>Package Quantity (Metric)</b>      | 60.96                             |
| <b>Customs Number</b>                 | 5808100000                        |
| <b>Weight (Metric)</b>                | 0.54                              |
| <b>Weight (Imperial)</b>              | 1.2                               |

© 2020 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)