


Specification Sheet

Part Number: T120R2H4

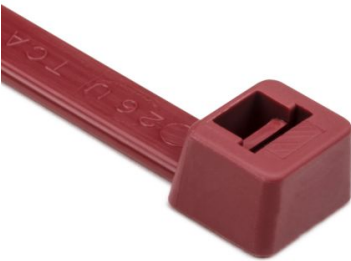

Heavy Duty Cable Tie, 15" Long, UL Rated, 120lb Tensile Strength, PA66, Red, 500/pkg

Article Number	111-12042
Type	T120R
Color	Red (RD)
Features & Benefits	• Engineered and manufactured for maximum performance and quality. • Made from 100% high-quality plastic to ensure efficient recycling. • Inside serration for a strong grip onto bundles. • Easy application either manually or with a tensioning tool. • Bent tail allows for simpler insertion.
Quantity Per	bag

Product Description	Heavy duty T-Series cable ties feature inside serrations to provide a positive hold on wire and cable bundles. Durable head design guarantees high tensile strength and a low insertion force. The bent tail allows quick and simple installations by hand. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.
Short Description	Heavy Duty Cable Tie, 15" Long, UL Rated, 120lb Tensile Strength, PA66, Red, 500/pkg
Global Part Name	T120R-PA66-RD
Minimum Tensile Strength (Imperial)	120.0
Minimum Tensile Strength (Metric)	535.0
Length L (Imperial)	15.0
Length L (Metric)	387.0
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.30
Width W (Metric)	7.6
Bundle Diameter Min (Imperial)	0.20

Bundle Diameter Min (Metric)	5.0
Bundle Diameter Max (Imperial)	4.13
Bundle Diameter Max (Metric)	105.0
Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
US MIL SPEC	MS3367-3-2, Class 2 SAE-AS33671
Flammability	UL 94 V2
Halogen free	Yes
Operating Temperature (Metric)	-40°F to +185°F (-40°C to +85°C)
ROHS Complaint	Yes
Certification/Specification WEB	CAGE Code 53421 UL-ZODZ.E64139
UL Recognized (US)	Yes
UL Listed (US and Canada)	Yes
UL Recognized (US and Canada)	Yes
UL Listed (US	Yes

Package Quantity(Imperial)	500
-----------------------------------	-----

Package Quantity (Metric)	500
----------------------------------	-----

Customs Number	3926909988
-----------------------	------------