


Specification Sheet

Part Number: T18S0C2

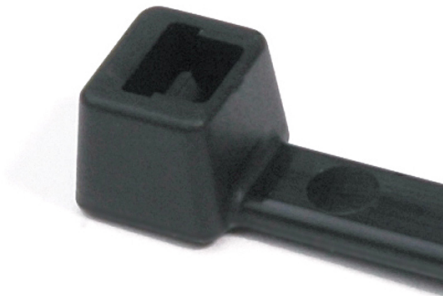

Cable Tie, 3.3" Long, UL Rated, 18lb Tensile Strength, PA66, Black, 100/pkg

|                     |                                                                                                                                                                                                                                                                                                                                                              |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Article Number      | 111-02810                                                                                                                                                                                                                                                                                                                                                    |
| Type                | T18S                                                                                                                                                                                                                                                                                                                                                         |
| Color               | Black (BK)                                                                                                                                                                                                                                                                                                                                                   |
| Features & Benefits | <ul style="list-style-type: none"><li>• Inside serrations allow for strong grip on cables and wire bundles.</li><li>• Head design provides high tensile strength with very low insertion force.</li><li>• Bent tail ensures a quick and simple installation.</li></ul>                                                                                       |
| Quantity Per        | bag                                                                                                                                                                                                                                                                                                                                                          |
| Product Description | T-Series Cable Ties feature inside serrations to provide a positive hold on wire and cable bundles. The head design guarantees high tensile strength and a low insertion force. The bent tail design allows quick and simple installations by hand. For high-volume applications, tensioning tools are available to ensure consistent and safe installation. |

|                                            |                                                                             |
|--------------------------------------------|-----------------------------------------------------------------------------|
| <b>Short Description</b>                   | Cable Tie, 3.3" Long, UL Rated, 18lb Tensile Strength, PA66, Black, 100/pkg |
| <b>Global Part Name</b>                    | T18S-PA66-BK                                                                |
| <b>Minimum Tensile Strength (Imperial)</b> | 18.0                                                                        |
| <b>Minimum Tensile Strength (Metric)</b>   | 80                                                                          |
| <b>Length L (Imperial)</b>                 | 3.27                                                                        |
| <b>Length L (Metric)</b>                   | 83.0                                                                        |
| <b>Identification Plate Position</b>       | none                                                                        |
| <b>Releasable Closure</b>                  | No                                                                          |
| <b>Tie Closure</b>                         | plastic pawl                                                                |
| <b>Variant</b>                             | Inside Serrated                                                             |
| <b>Width W (Imperial)</b>                  | 0.09                                                                        |
| <b>Width W (Metric)</b>                    | 2.3                                                                         |
| <b>Bundle Diameter Min (Imperial)</b>      | 0.06                                                                        |
| <b>Bundle Diameter Min (Metric)</b>        | 1.5                                                                         |
| <b>Bundle Diameter Max (Imperial)</b>      | 0.63                                                                        |

|                                        |                                            |
|----------------------------------------|--------------------------------------------|
| <b>Bundle Diameter Max (Metric)</b>    | 16.0                                       |
| <b>Material</b>                        | Polyamide 6.6 (PA66)                       |
| <b>Material Shortcut</b>               | PA66                                       |
| <b>Flammability</b>                    | UL 94 V2                                   |
| <b>Halogen free</b>                    | Yes                                        |
| <b>Operating Temperature (Metric)</b>  | -40°F to +185°F (-40°C to +85°C)           |
| <b>ROHS Complaint</b>                  | Yes                                        |
| <b>Certification/Specification WEB</b> | DNV GL   IEC 62275:2006 UL   ANSI/UL 62275 |
| <b>UL Recognized (US)</b>              | Yes                                        |
| <b>UL Listed (US and Canada)</b>       | Yes                                        |
| <b>UL Recognized (US and Canada)</b>   | Yes                                        |
| <b>UL Listed (US</b>                   | Yes                                        |
| <b>Package Quantity(Imperial)</b>      | 100                                        |
| <b>Package Quantity (Metric)</b>       | 100                                        |

