

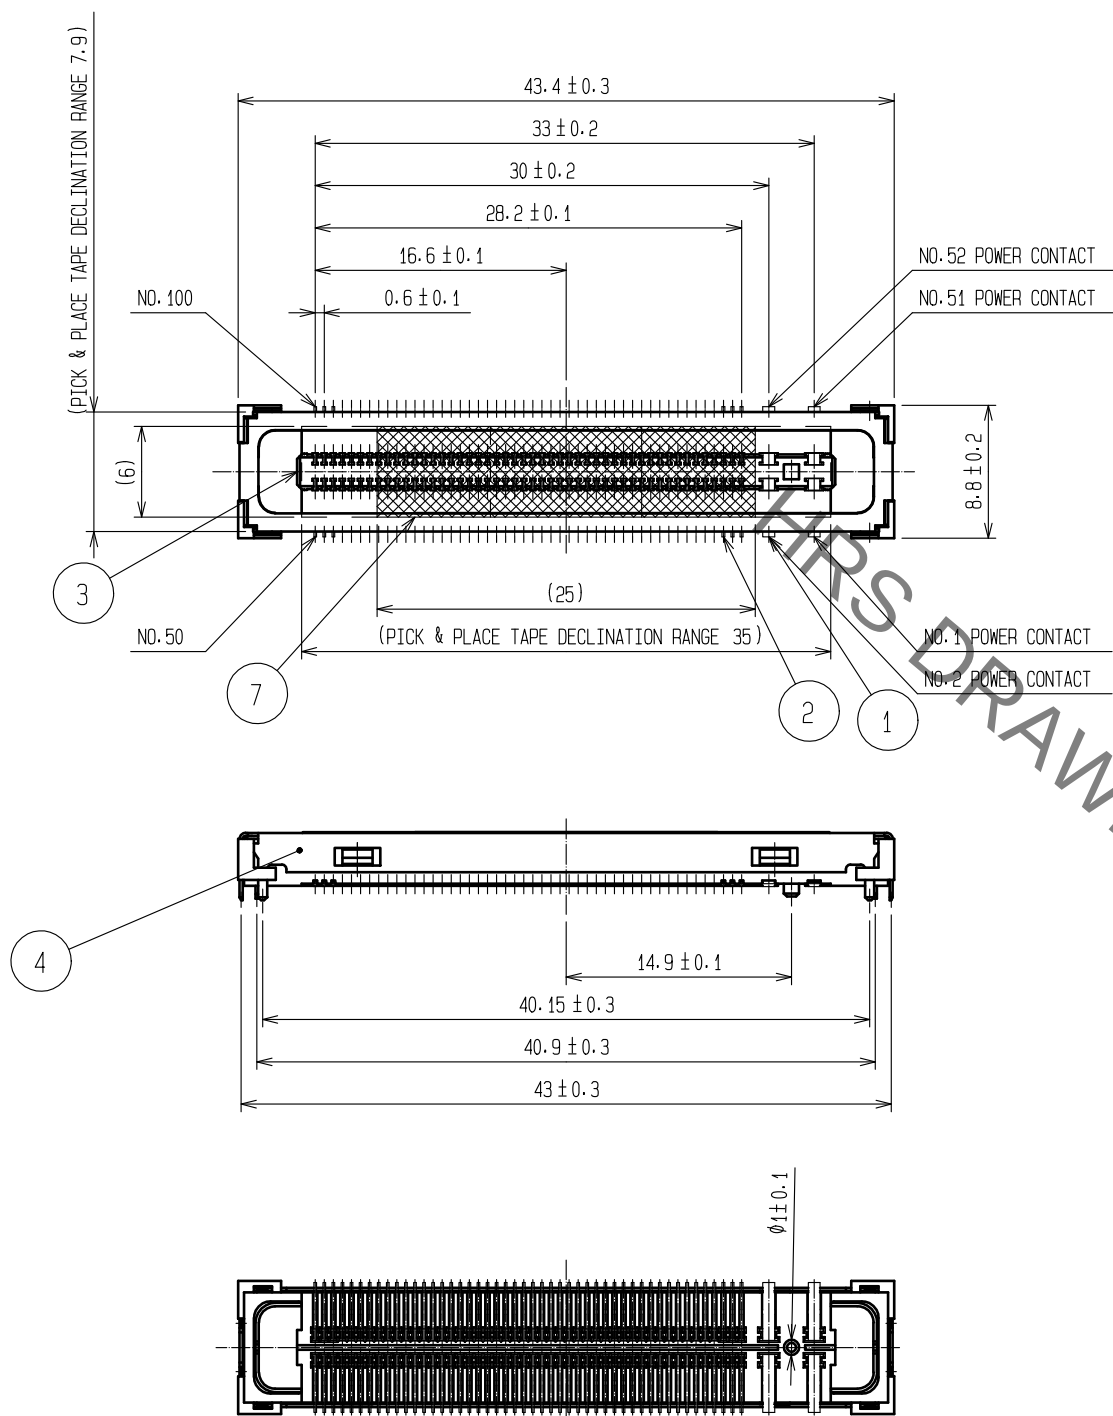


Jun.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

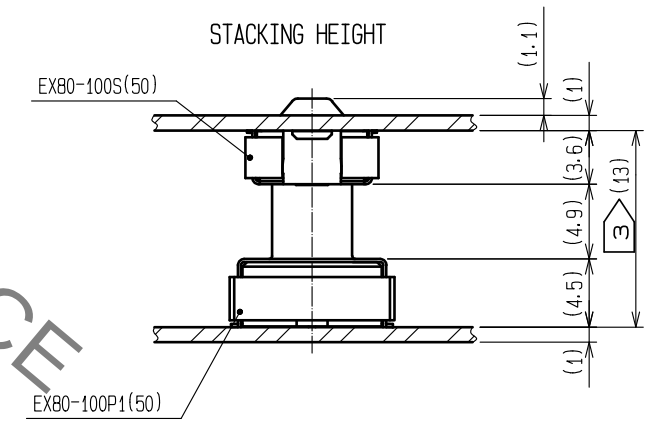


RECOMMENDED PC BOARD PATTERN(AUTOMATIC MOUNTING)
(COMPONENT MOUNTING SIDE:PCB t=1 MIN)

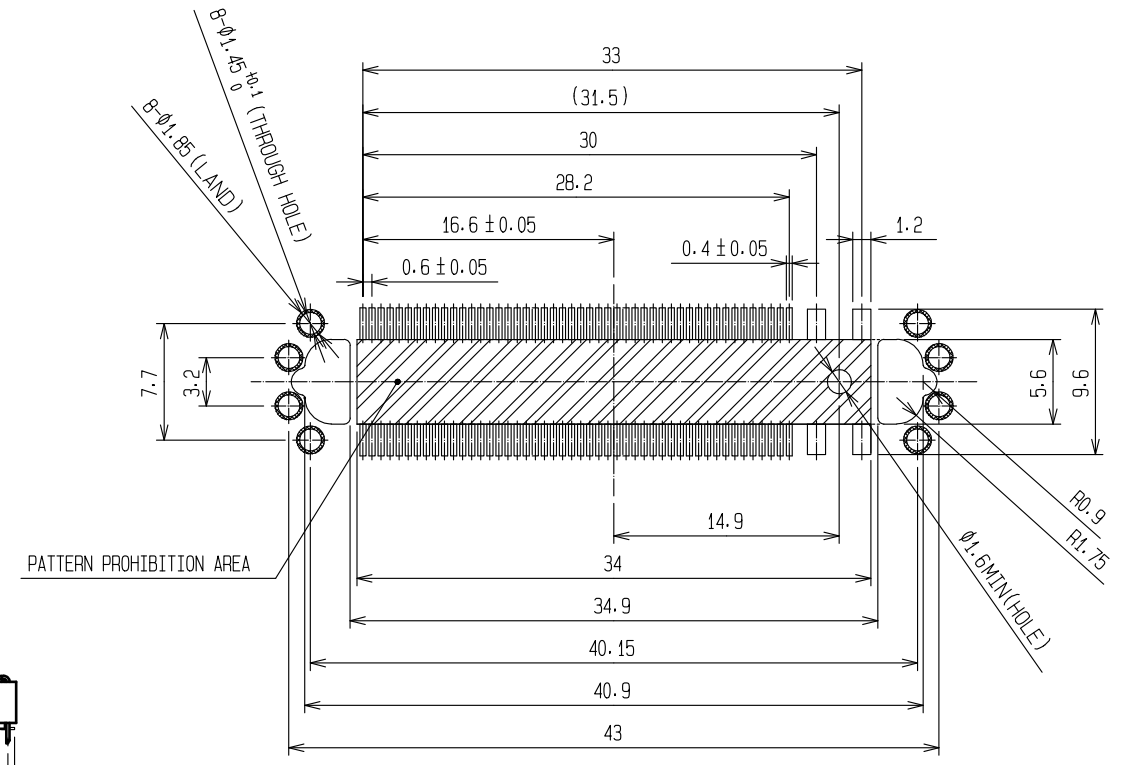

- NOTE 1 CONTACT CO-PLANARITY TO BE MAX 0.15.
2 TOLERANCES TO BE ± 0.1 UNLESS OTHERWISE SPECIFIED.
3 DEVICE DESIGN SHALL CONSIDER THE STACKED HEIGHT TO BE 14.5mm MAX.
(RECOMMENDED STACKED HEIGHT IS 13.7mm MAX.)
4 CONTACT AREA :GOLD PLATING 0.2 μ m min
LEAD AREA :TIN COPPER PLATING 1 μ m min
THE OTHERS AREA:NICKEL PLATING 2 μ m min
5 DIP AREA :TIN COPPER 2 μ m min
THE OTHERS AREA:NICKEL PLATING 0.6 μ m min

			7		PICK & PLACE TAPE												
3	LCP	UL94V-0, BLACK		6	PS		MILKY-WHITE										
2	PHOSPHOR BRONZE	4		5	PS		MILKY-WHITE										
1	COPPER ALLOY	4		4	STAINLESS STEEL		5										
NO.		MATERIAL		FINISH, REMARKS		NO.		MATERIAL		FINISH, REMARKS							
UNITS mm				SCALE 2 : 1		△		COUNT	DESCRIPTION OF REVISIONS			DESIGNED		CHECKED		DATE	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : NM. NISHIMATSU				15.10.27		DRAWING NO.		EDC-122485-30-00							
		CHECKED : KN. ICHIKAWA				15.10.27		PART NO.		EX80-100S(30)							
		DESIGNED : TS. ITO				15.10.27		CODE NO.		CL232-0592-2-30							
		DRAWN : AK. AKIYAMA				15.10.27				△ 1 2							
5				6				7				8					

EX80-100S PACKAGING FIGURE

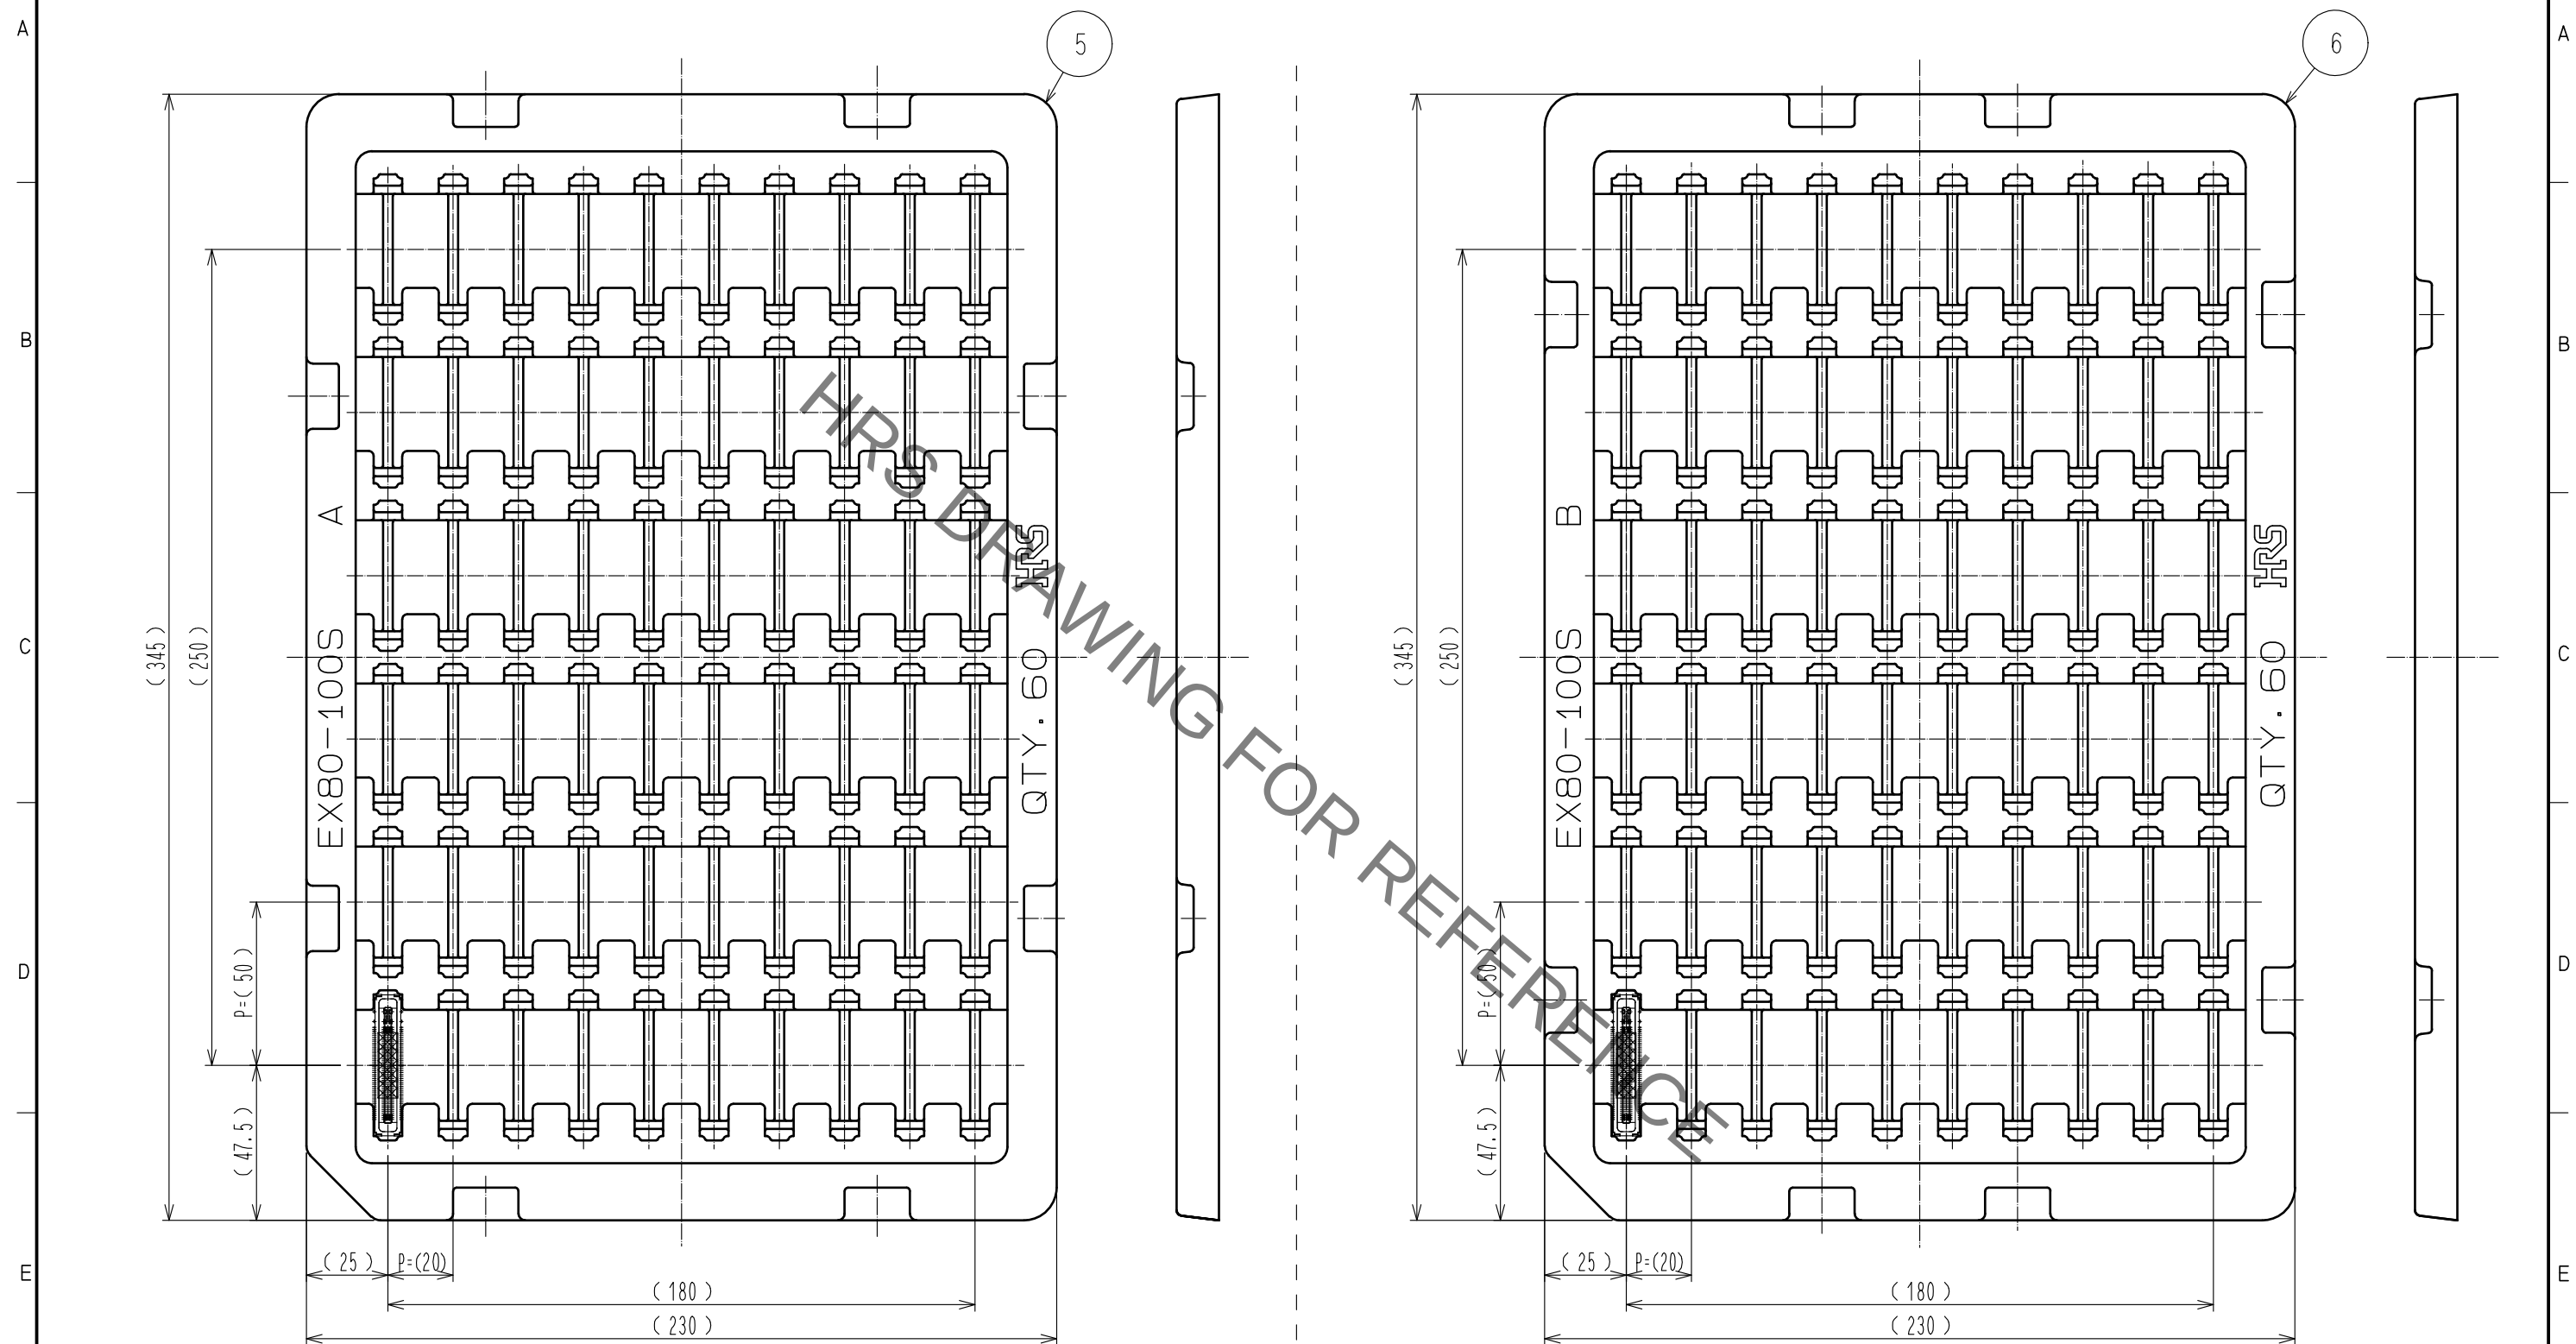

NOTE 6 QUANTITY PER TRAY TO BE 60 PCS MAX.
ORDERING VOLUME TO BE MADE BY QUANTITY OF CONNECTOR.
7 A TYPE AND B TYPE TRAY PILED UP ONE AFTER ANOTHER.

HRS

図番: EDC-122485-30-00
製品名: EX80-100S(30)
製品コード: CL232-0592-2-30

2/2