
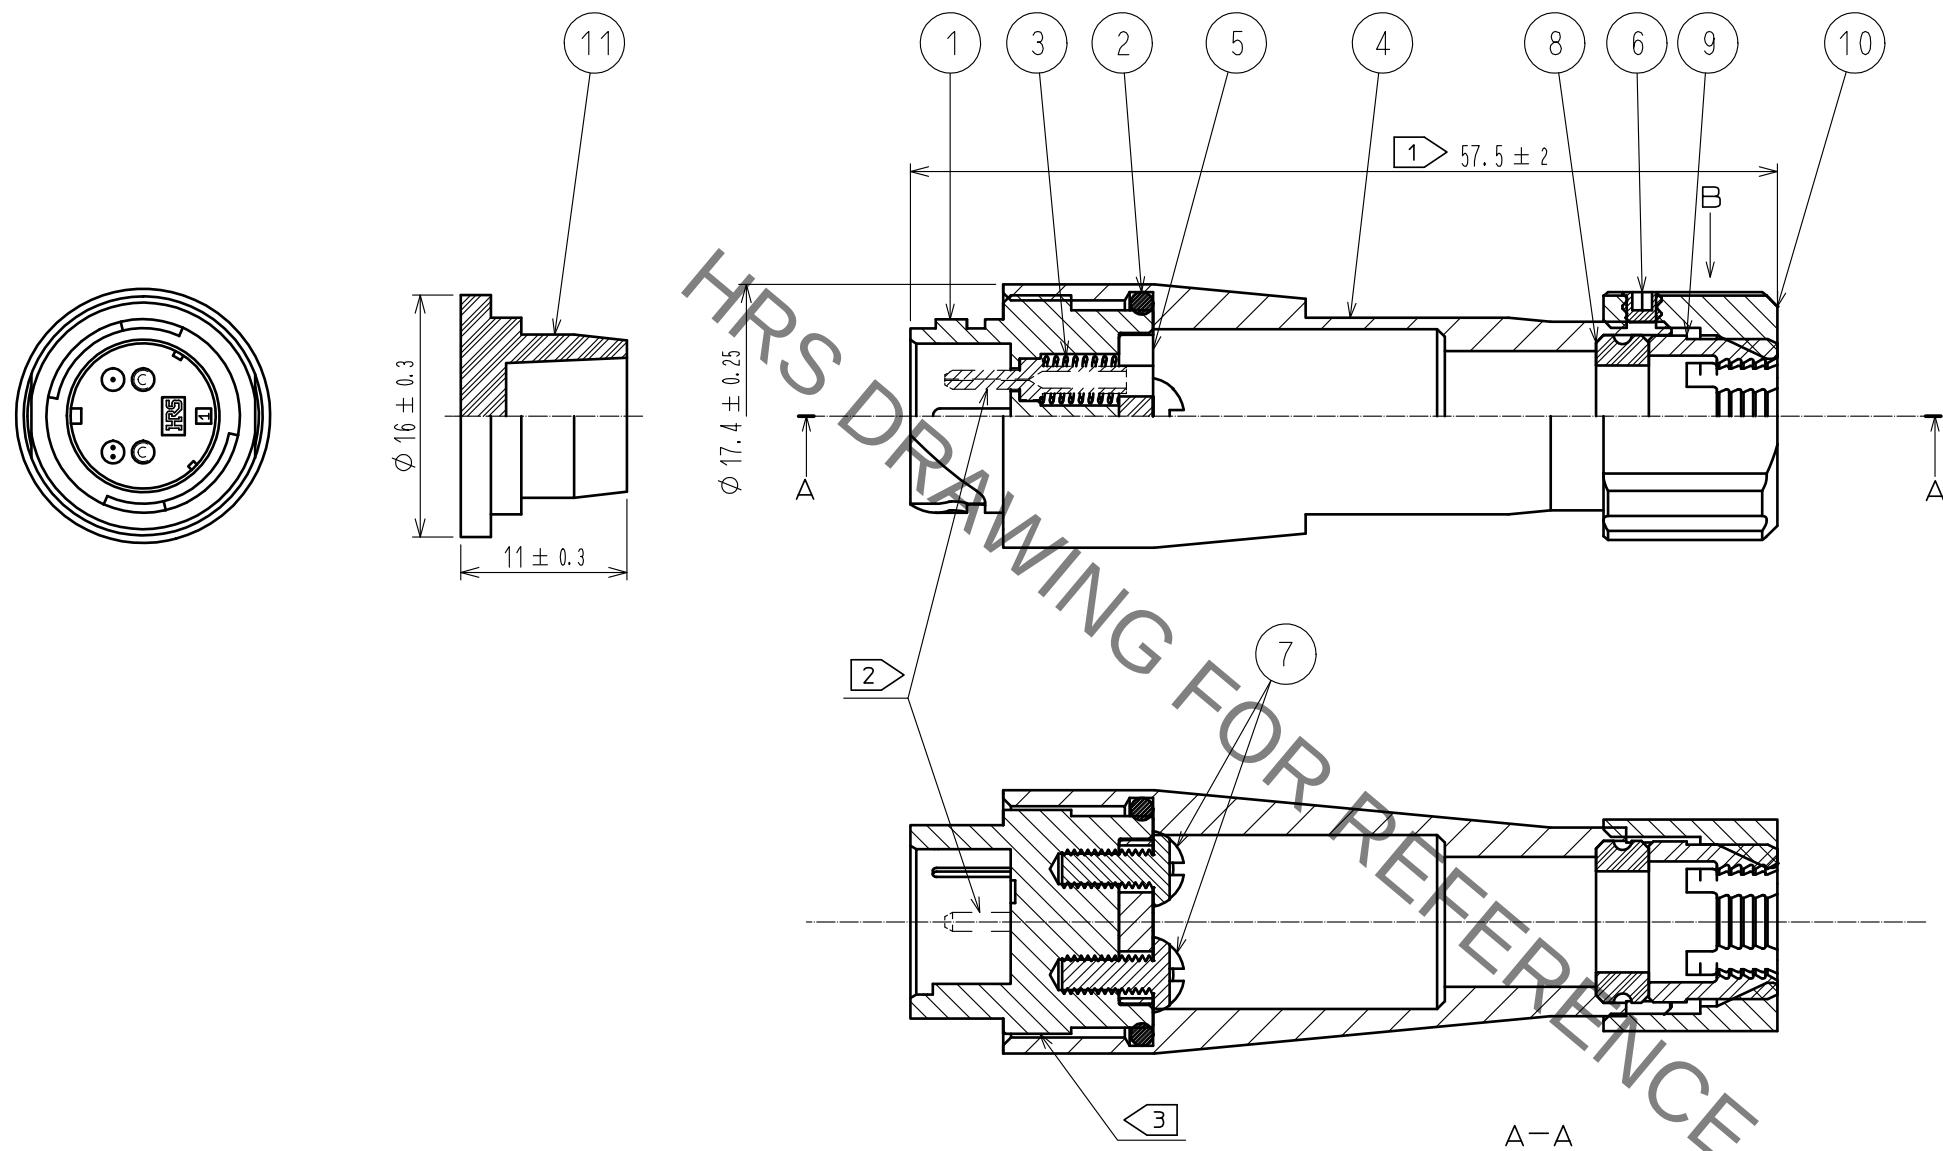


May.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



NOTE 1 These are indicates the dimensions of after assembling
2 Ferrules are not included in this product. MU Ferrules are sold separately.
3 Apply adhesive to around the threads of R-shell-J(part No.1) before tighten Hood(part No.4).
4 Clamp ring has two holes for fixing hexagon socket screw.
Tighten the screw at visible either hole with tightening torque 25N・cm. or either hole if both holes are visible.

6	STAINLESS STEEL	_____			
5	PBT RESIN	COLOR:BLACK	11	SILICONE RUBBER	COLOR:BLACK
4	ALUMINUM ALLOY	ANODIC OXIDE COATING	10	ZINC ALLOY DIE CASTING	NICKEL PLATING
3	PIANO WIRE	ZINC PLATING * BAKING	9	PA RESIN	COLOR:WHITE
2	NITRILE BUTADIENE RUBBER	COLOR:BLACK	8	CHLOROPRENE RUBBER	COLOR:BLACK
1	ZINC ALLOY DIE CASTING	NICKEL PLATING	7	STAINLESS STEEL	_____
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm   HIROSE ELECTRIC CO., LTD.	SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
	APPROVED : MT. SHIBUTANI 18. 03. 28				DRAWING NO. EDC-177028-32-00		
	CHECKED : MT. SHIBUTANI 18. 03. 28				PART NO. MF10B-WJ6. 5C01-0200(32)		
	DESIGNED : SI. MATSUMOTO 18. 03. 28				CODE NO. CL709-1011-7-32		
DRAWN : SI. MATSUMOTO 18. 03. 28							